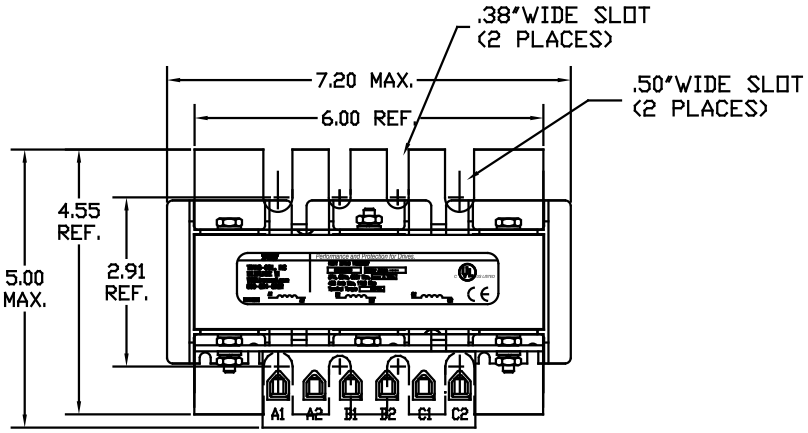

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TORQUE (LB-IN)
KDRULE2H	480	30	40	141	16	20
KDRULE42H	575/600	30	32	140	16	20

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

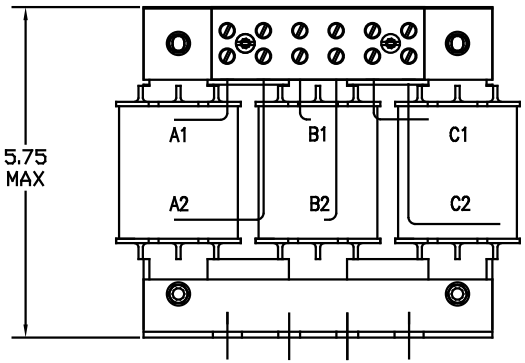

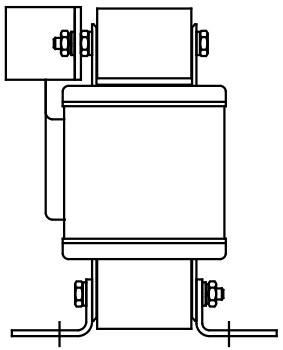

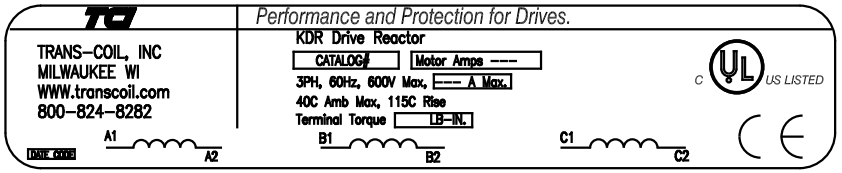

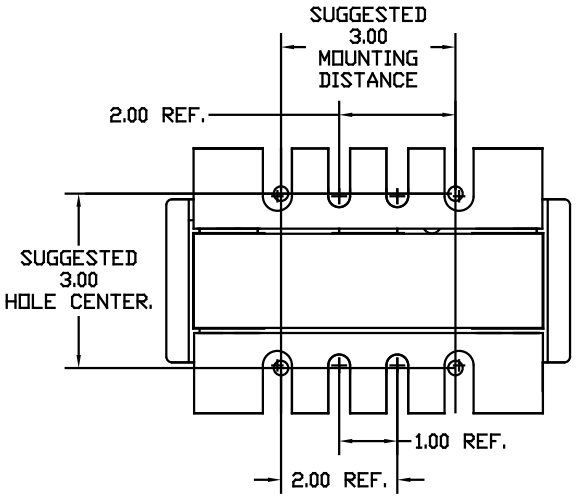



TERMINAL BLK MARKING

Block Wire Range:	#18 to #4 AWG Solid or Stranded, Copper
Tightening Torque:	20 LB-IN

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON COIL AND TERMINAL BLOCK FOR REFERENCE ONLY.

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

KDRUL OPEN (FRAME E)
KDR DRIVE REACTOR

DRN. BY DSW | DATE 04/26/04 | DWG. NO. C KDRULOPEN-5DG
SCALE TO FIT | APPVD. | SHT. 1 OF 1