




# V1k Type 3R


## V1k is now available in the UL Type 3R enclosure

This UL Listed enclosure is able to withstand outdoor conditions and protect the V1k dv/dt output filter from dirt, precipitation, and ice.

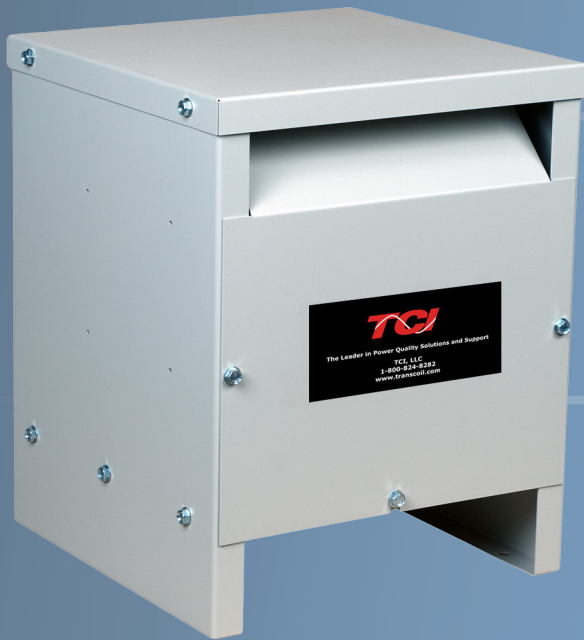

### V1k Benefits:

- High Performance
  - Limits Peak Voltage
  - Increases Voltage Rise Time
- Reduced Filter Size
  - Smaller Mechanical Layout
- Common Mode Current Reduction of at least 30%
  - Reduces Bearing Pitting and Fluting
- Performance Guarantee
- Specific Applications can reach 3000 feet (individual results may vary)
- UL and CUL Listed
- Single Motor or Multiple Motor Capable
- Efficiency is greater than 98%

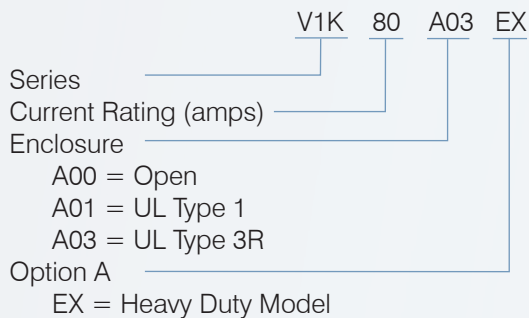



The Leader in Power Quality Solutions and Support

## V1k Type 3R Enclosure

PART NUMBER	RATED VOLTS	HORSE POWER	AMPS	HEIGHT	WIDTH	DEPTH	WATTS LOSS	WEIGHT	LIST PRICE
V1K2A03	480	0.75	2	11.45	10	12	75	25	783.00
V1K3A03	480	1.5	3	11.45	10	12	75	25	789.00
V1K4A03	480	2	4	11.45	10	12	75	25	793.00
V1K6A03	480	3	6	11.45	10	12	80	25	807.00
V1K8A03	480	5	8	11.45	10	12	90	25	825.00
V1K12A03	480	7.5	12	11.45	10	12	95	25	862.00
V1K16A03	480	10	16	11.45	10	12	95	29	879.00
V1K18A03	480	10	18	11.45	10	12	110	25	916.00
V1K21A03	480	15	21	11.45	10	12	110	29	954.00
V1K25A03	480	15	25	11.45	10	12	110	29	975.00
V1K27A03	480	20	27	19.18	15.62	19.5	110	29	1,011.00
V1K35A03	480	25	35	19.18	15.62	19.5	130	56	1,046.00
V1K45A03	480	30	45	19.18	15.62	19.5	135	56	1,080.00
V1K55A03	480	40	55	19.18	15.62	19.5	145	56	1,178.00
V1K80A03	480	60	80	19.18	15.62	19.5	255	62	1,534.00
V1K110A03	480	75	110	19.18	15.62	19.5	245	74	1,889.00
V1K130A03	480	100	130	19.18	15.62	19.5	270	89	2,129.00
V1K160A03	480	125	160	19.18	15.62	19.5	260	99	2,287.00
V1K200A03	480	150	200	19.18	15.62	19.5	265	99	2,381.00
V1K250A03	480	200	250	19.18	15.62	19.5	290	99	2,428.00
V1K305A03	480	250	305	22.15	20.62	28.5	325	109	2,442.00
V1K362A03	480	300	362	22.15	20.62	28.5	300	109	2,718.00
V1K420A03	480	350	420	22.15	20.62	28.5	450	156	2,946.00
V1K480A03	480	400	480	22.15	20.62	28.5	475	161	3,301.00
V1K600A03	480	500	600	36	28.21	36.86	515	297	3,609.00
V1K750A03	480	600	750	36	28.21	36.86	770	307	6,464.00

PART NUMBER	RATED VOLTS	HORSE POWER	AMPS	HEIGHT	WIDTH	DEPTH	WATTS LOSS	WEIGHT	LIST PRICE
V1K2A03EX	480	0.75	2	11.45	10	12	75	25	900.00
V1K3A03EX	480	1.5	3	11.45	10	12	75	25	907.00
V1K4A03EX	480	2	4	11.45	10	12	75	25	912.00
V1K6A03EX	480	3	6	11.45	10	12	80	25	928.00
V1K8A03EX	480	5	8	11.45	10	12	90	25	949.00
V1K12A03EX	480	7.5	12	11.45	10	12	95	25	992.00
V1K16A03EX	480	10	16	11.45	10	12	95	29	1,010.00
V1K18A03EX	480	10	18	11.45	10	12	110	25	1,054.00
V1K21A03EX	480	15	21	11.45	10	12	110	29	1,097.00
V1K25A03EX	480	15	25	11.45	10	12	110	29	1,121.00
V1K27A03EX	480	20	27	19.18	15.62	19.5	110	29	1,163.00
V1K35A03EX	480	25	35	19.18	15.62	19.5	130	56	1,203.00
V1K45A03EX	480	30	45	19.18	15.62	19.5	135	56	1,242.00
V1K55A03EX	480	40	55	19.18	15.62	19.5	145	56	1,355.00
V1K80A03EX	480	60	80	19.18	15.62	19.5	255	62	1,764.00
V1K110A03EX	480	75	110	19.18	15.62	19.5	245	74	2,172.00
V1K130A03EX	480	100	130	19.18	15.62	19.5	270	89	2,449.00
V1K160A03EX	480	125	160	19.18	15.62	19.5	260	99	2,630.00
V1K200A03EX	480	150	200	19.18	15.62	19.5	265	99	2,739.00
V1K250A03EX	480	200	250	19.18	15.62	19.5	290	99	2,792.00
V1K305A03EX	480	250	305	22.15	20.62	28.5	325	109	2,809.00
V1K362A03EX	480	300	362	22.15	20.62	28.5	300	109	3,126.00
V1K420A03EX	480	350	420	22.15	20.62	28.5	450	156	3,388.00
V1K480A03EX	480	400	480	22.15	20.62	28.5	475	161	3,796.00
V1K600A03EX	480	500	600	36	28.21	36.86	515	297	4,150.00
V1K750A03EX	480	600	750	36	28.21	36.86	770	307	7,433.00