UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
3	5TH	240	60	3	7.5
ENCLOSURE	NEMA 1-COLOR, BLACK				
APPROX.WT. LBS.	75				

SYMBOL	TCI PART NUMBER
LR	KDRC21T
TR	KTR3B65HG
CAP1, 2, 3, 4.	16446
Fu1, 2, 3	15752



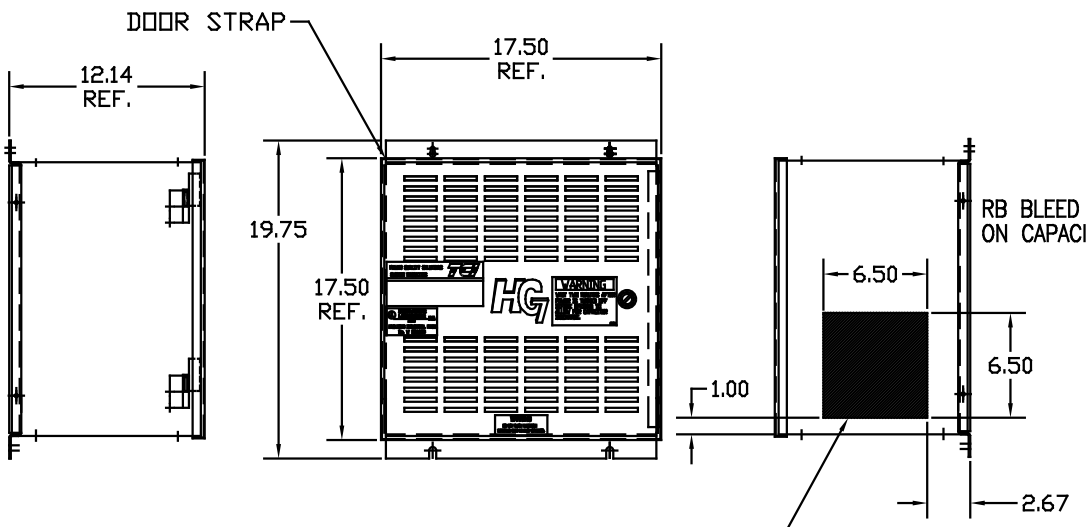



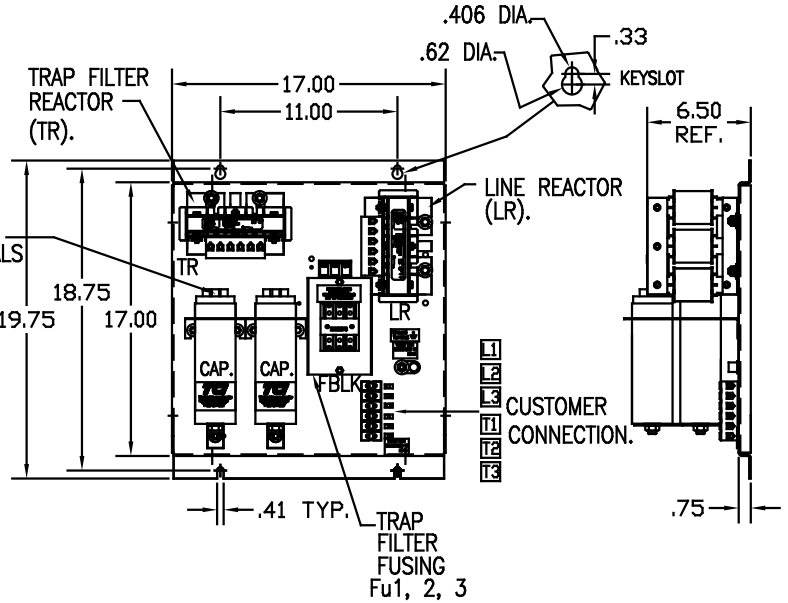

ENCLOSURE NOT SHOWN

SEE 25178 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

PB–POWER INPUT BLOCK:
WIRE RANGE–#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN–LB.

GROUND LUG:
WIRE RANGE–1/0 TO #14 AWG.
TIGHTENING TORQUE 200 IN–LB.

NO	REVISION	DATE	BY
	MOVE POWER BLOCK	02/21/06	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL .XX ±.03 .XXX±.01
FRACTIONAL ± 1/32
ANGULAR ± 1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

HG8BW01ST, HG7 STANDARD 7.5HP, 240/3/60, TYPE 1

DRN. BY DSW | DATE 04/19/05 | DWG. NO. C 102503DG
SCALE TO FIT | APPVD. | SHT. 1 OF 1