UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
5	5TH	480	60	3	15
ENCLOSURE		NEMA 1- COLOR, BLACK			
APPROX.WT. LBS.		75			

SYMBOL	TCI PART NUMBER
LR	KDRF1T
TR	KTR5A65HG
CAP.	16447
Fu1, 2, 3	15752



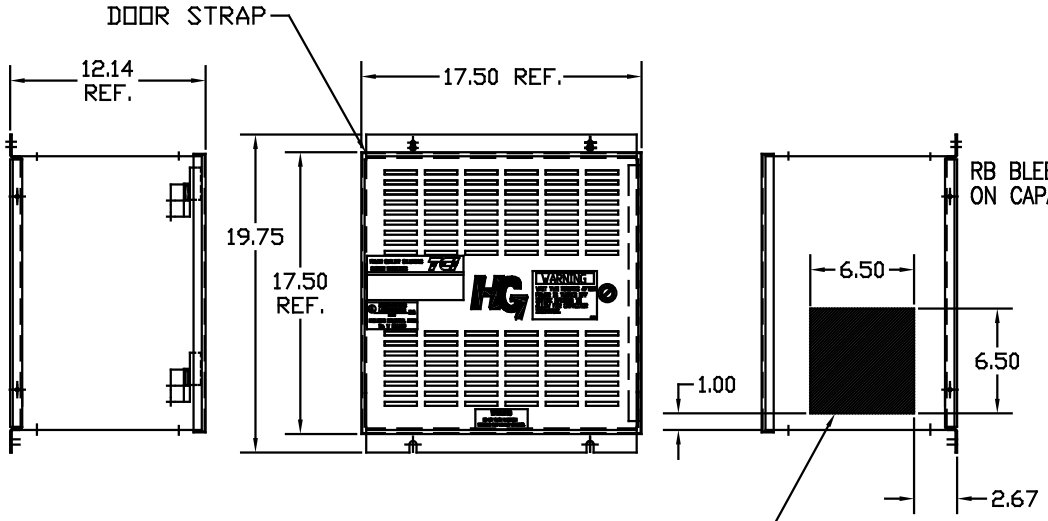

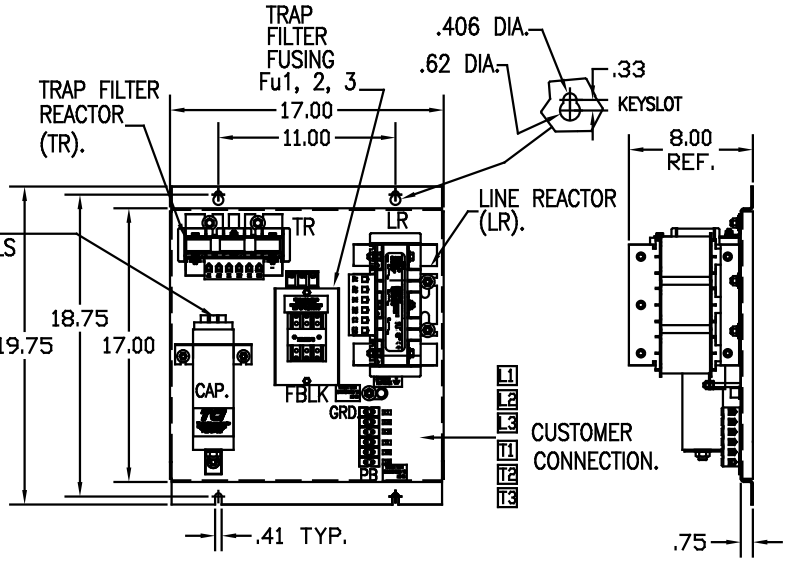



HATCHED AREAS ARE SUGGESTED
CUSTOMER WIRE AND EXIT LOCATIONS
(BOTTOM ENTRANCE ALTERNATE–CONSULT TCI)

ENCLOSURE NOT SHOWN

SEE 25077 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

PB–POWER INPUT BLOCK:
WIRE RANGE–#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN–LB.

GROUND LUG:
WIRE RANGE–1/0 TO #14 AWG.
TIGHTENING TORQUE 200 IN–LB.

NO	REVISION	DATE	BY
	MOVE POWER BLOCK	02/21/06	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

TCI
7878 N. 86th STREET
MILWAUKEE, WI 53224

HG15AW01ST, HG7 STANDARD
15HP, 480/3/60, TYPE 1

DRN. BY DSW | DATE 03/08/05 | DWG. NO. C 102554DG
SCALE TO FIT | APPVD. | SHT. 1 OF 1