

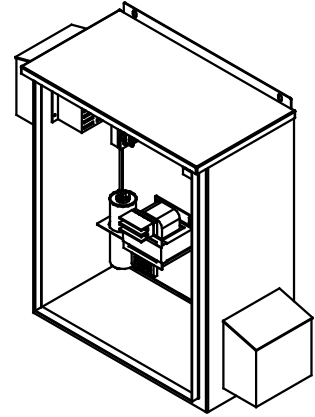



SEE DWG# 26756 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.


NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.

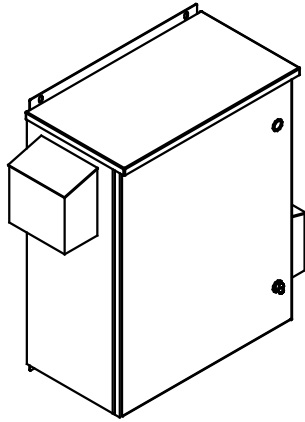


INSIDE DOOR

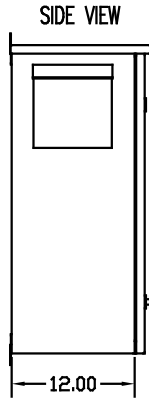


SIDE VIEW

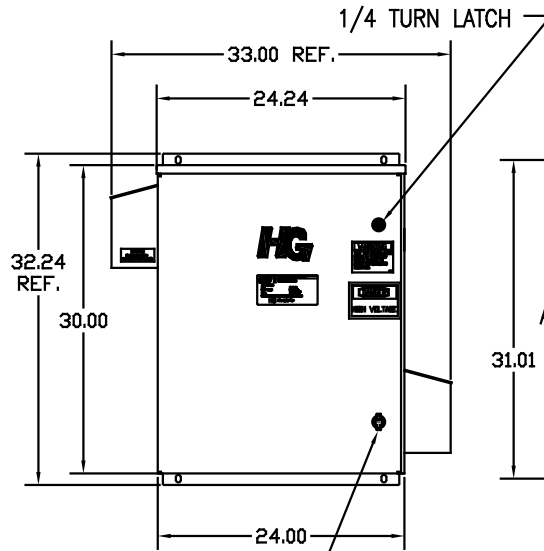

PADLOCKABLE WING NUT

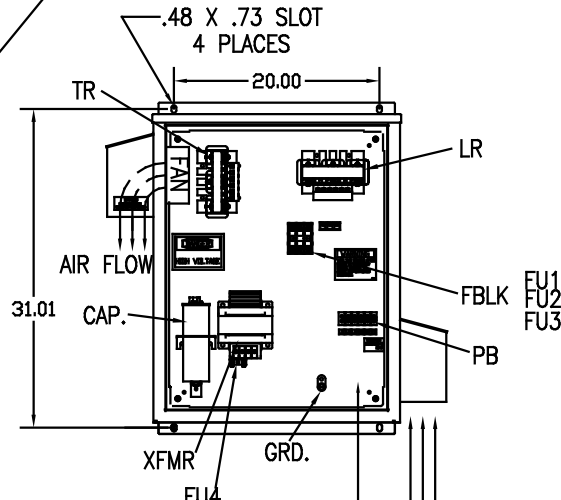

FRONT VIEW WITHOUT DOOR



UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
6	5TH	480	60	3	20
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
APPROX.WT. LBS.		130			

SYMBOL	TCI PART NUMBER
LR	KDRF2T
TR	KTR6A65HG
CAP1, CAP2, (3 KVAR)	KCAP3A6A
XFMR.	23896
Fu1, 2, 3	15752
Fu4,6	24009
Fu5	17567



PB-POWER INPUT BLOCK:
WIRE RANGE-#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN.-LB.

GROUND LUG:
WIRE RANGE-1/0 TO #14 AWG.
TIGHTENING TORQUE 200 IN.-LB.

				TOLERANCES EXCEPT AS NOTED:		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				XX ±.12		HG20AW03ST, 20HP 480/3/60 UL TYPE 3R	
				.XXX±.03			
				FRACTIONAL		DRG BY DSW DATE 08/26/08 DWG. NO. 103613DG SCALE TO FIT APPROV. C	
				± 1/32			
				ANGULAR		SHT. 1 OF 1	
				± 1/2°			
NO.	REVISION	DATE	BY				