

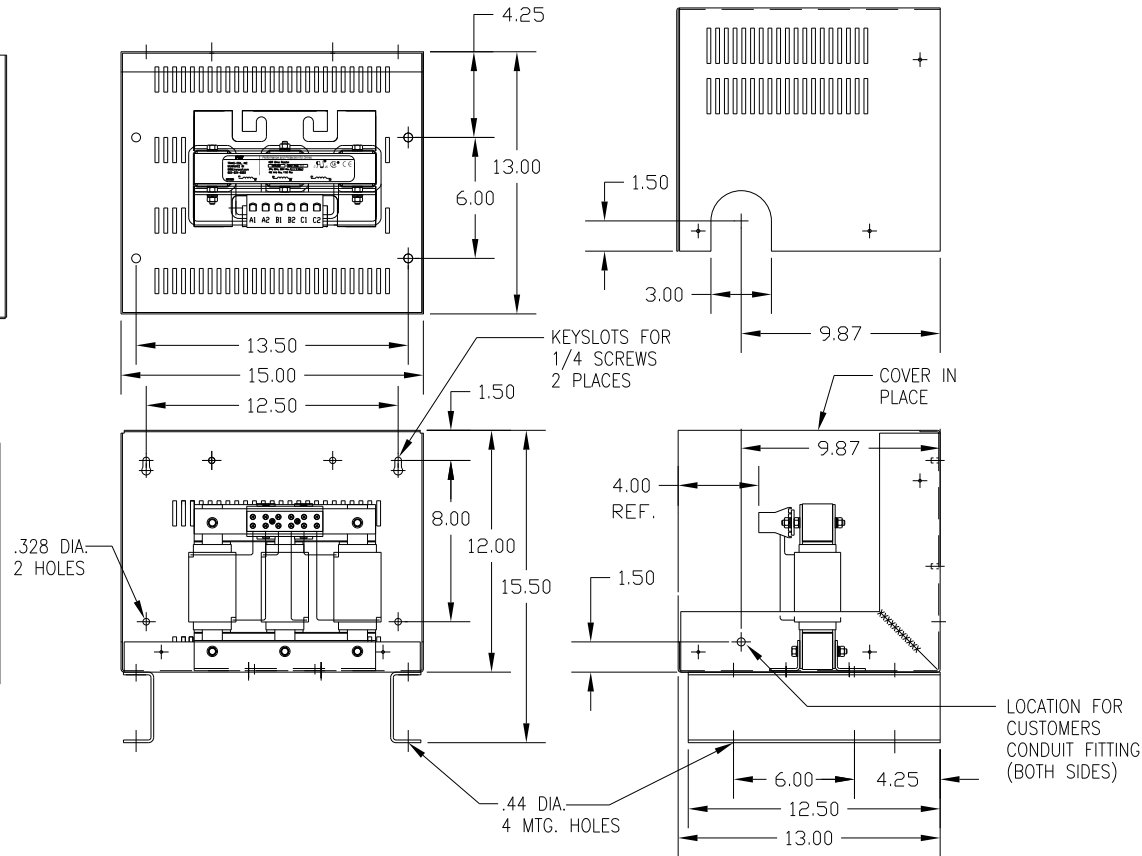



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS
KDRH42HC4	575/600	75	77	251	85

NEC MOTOR CURRENTS SHOWN IN THE 575/600 VOLT CHART
ARE BASED ON HORSE POWERS AT 575 VOLT.



NOTE: A1, A2, B1, B2, C1, C2,
MARKINGS ON TERMINAL BLOCK
FOR REFERENCE ONLY.

TERMINAL BLOCK TORQUE(LB-IN)=CUSTOMER WIRE
35 = 1 AWG THRU 4 AWG
30 = 6 AWG THRU 14 AWG
25 = 16 AWG THRU 20 AWG
20 = 22 AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224 KDR DRIVE REACTOR, ENCLOSED 600V HIGH Z, FRAME H
				DECIMAL	
				.XX ± .03	
				.XXX ± .01	
				FRACTIONAL ± 1/32	DRN BY DSW DATE 02/13/12 SCALE TO FIT APRVD. B
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY		DWG. NO. KDRH42HC4DG SHT. 1 OF 1