



SEE DWG# 26757 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.





NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

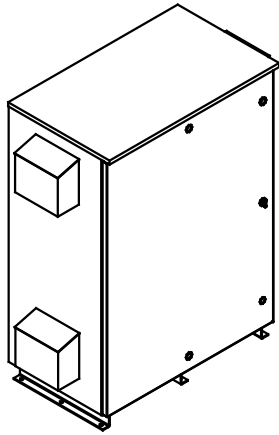

INSIDE DOOR



SIDE VIEW

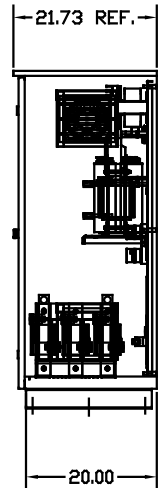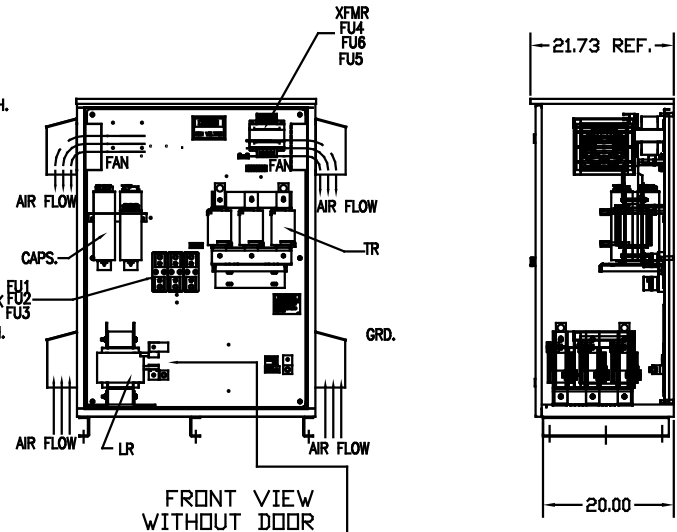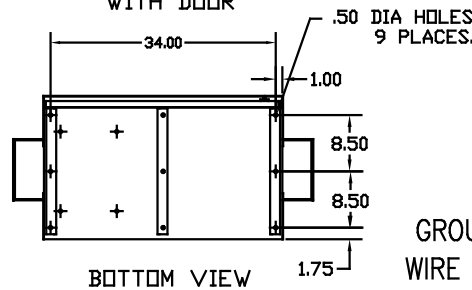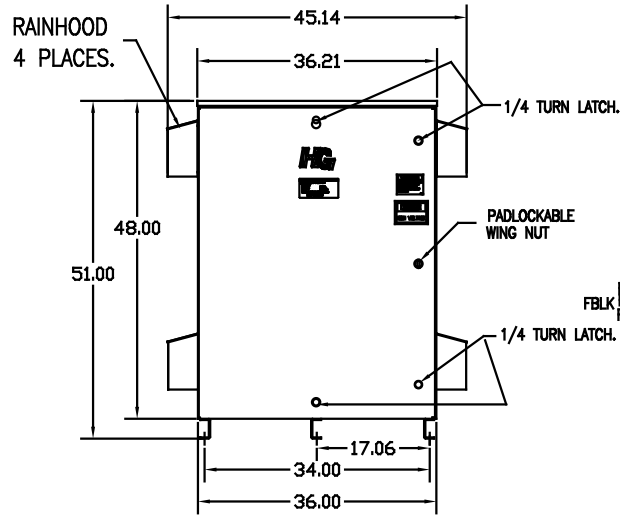

SYMBOL	TCI PART NUMBER
LR	KDRS2T
TR	KTR75A65HG
CAP.1, CAP.2, CAP.3 (20 KVAR)	KCAP20A6B
CAP.4 (5 KVAR)	KCAP5A6A
XFMR.	23899
Fu1,2,3	13333
Fu4,6	14106
Fu5	23977

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
75	5TH	480	60	3	250
ENCLOSURE	TYPE 3R- COLOR WHITE				
APPROX.WT. LBS.	547				

GROUND LUG:  
WIRE RANGE—ONE 600MCM-4  
TWO 250MCM-1/0  
TIGHTENING TORQUE 500 IN-LB.

CUSTOMER CONNECTION OUTPUT:  
WIRE RANGE—ONE 600MCM-4  
TWO 250MCM-1/0  
TIGHTENING TORQUE 500 IN-LB.

TOLERANCES EXCEPT AS NOTED:				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL	FRACTIONAL	ANGULAR	SCALE	
XX ±.12				HG250AW03ST, 250HP 480/3/60 UL TYPE 3R DWG. NO. 103624DG DATE 09/15/08 DESIGNED BY DSW CHECKED BY APPROVED BY SCALE TO FIT
.XXX ±.06				
± 1/32				
± 1/2°				
NO	REVISION	DATE	BY	