



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	AMPS MAX.
KDRULL1HE01	480	250	302	548	162	310

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..


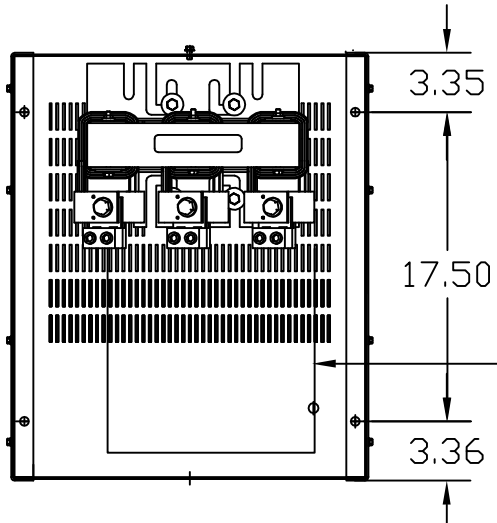


RECOMMENDED CONDUIT ENTRANCE AREA - LEFT FRONT SIDE, BOTTOM FRONT. RIGHT FRONT SIDE AND TOP.

LUG WIRE RANGE TWO 350MCM-2 AWG, COPPER, TORQUE 375 LB-IN FOR REACTOR. TWO 2AWG-6AWG, COPPER, TORQUE 275 LB-IN

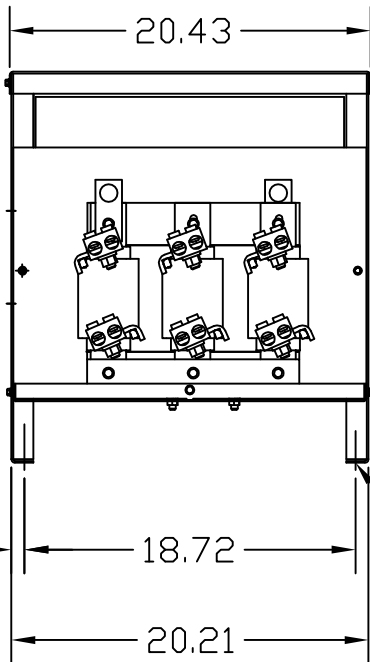

.50 DIA MOUNTING HOLE (4 PLACES)

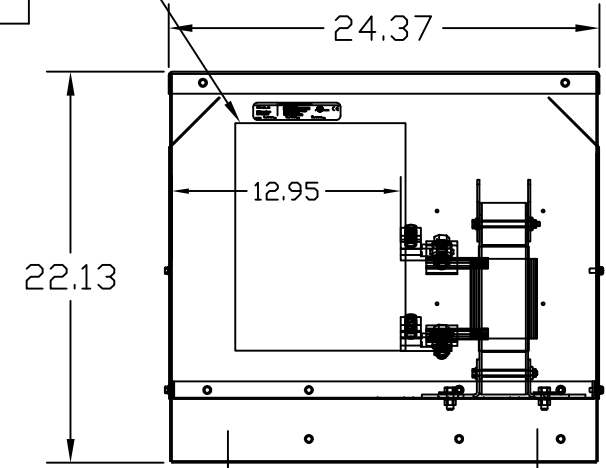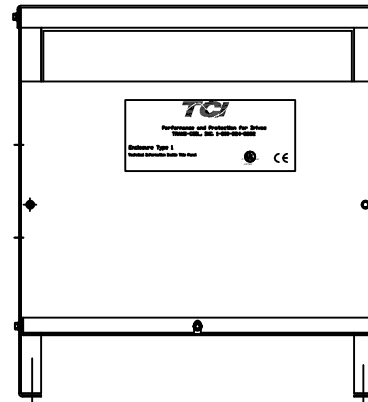

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES EXCEPT AS NOTED DECIMAL	W132 N10611 Grant Drive Germantown, WI 53022
					.XX ± .03	
						.XXX ± .01
						FRACTIONAL ± 1/32
					ANGULAR ± 1/2°	KDRULL1HE01 480V, 310A MAX. TYPE 1
	A	3185 PT TERMINAL CHANGE	9/15/14	DSW		DRN BY DSW DATE 6/28/04 DWG NO 105761DG SCALE TO FIT SIZE C
	NO	REVISION	DATE	BY		SHT.1 OF 1