

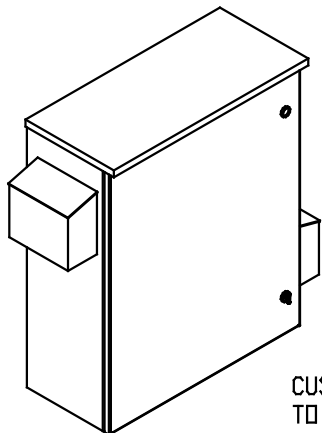


SEE DWG# 26757 FOR SCHEMATIC

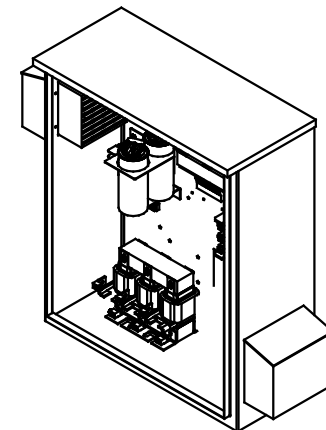


CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.





NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.

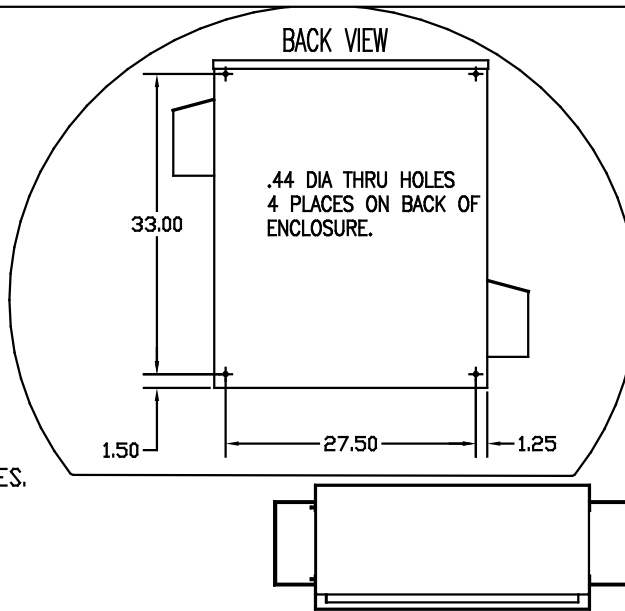

SIDE VIEW



INSIDE DOOR

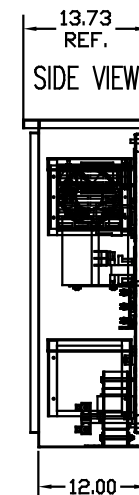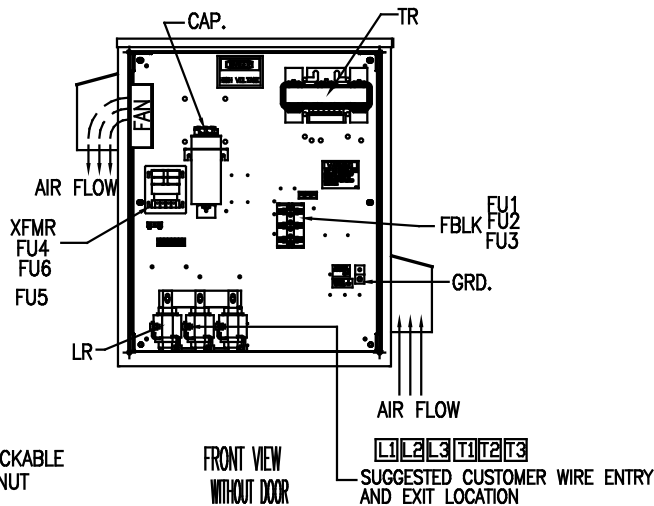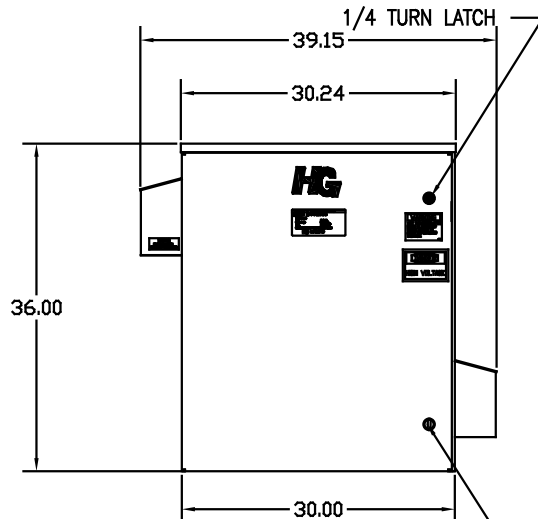

UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
25	5TH	480	60	3	75	
ENCLOSURE		UL TYPE 3R				
COLOR		WHITE				
APPROX.WT. LBS.		249				

SYMBOL	TCI PART NUMBER
LR	KDRG3T
TR	KTR25A65HG
CAP (15 KVAR)	KCAP15A6B
CAP (10 KVAR)	KCAP10A6B
XFMR.	23896
Fu1, 2, 3	11006
Fu4,6	24009
Fu5	17567

CUSTOMER CONNECTIONS	GROUND LUG:
WIRE RANGE-2/0-6	WIRE RANGE-2/0-6
TIGHTENING TORQUE 120 IN.-LB.	TIGHTENING TORQUE 120 IN.-LB.

				TOLERANCES EXCEPT AS NOTED: DECIMAL XX ±.12 .XXX±.06 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	7878 N. 86th STREET MILWAUKEE, WI 53224  HG75AW03ST, 75HP 480/3/60 UL TYPE 3R
NO	REVISION	DATE	BY	DRW BY DSW DATE 8/21/08 DWG. NO. 103619DG SCALE TO FIT APPR. C	