



SEE DWG# 26972-2 FOR SCHEMATIC

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.








CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

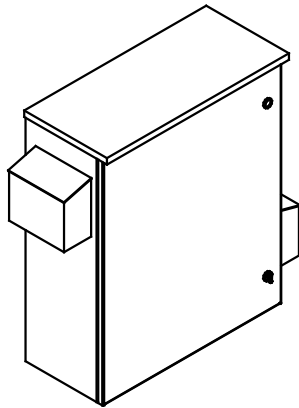

SIDE VIEW



INSIDE VIEW OF DOOR

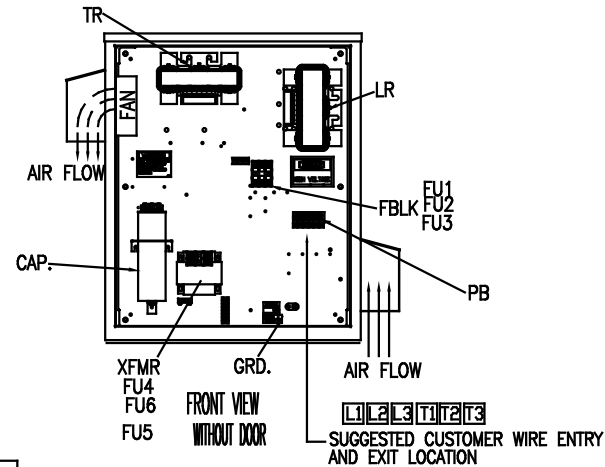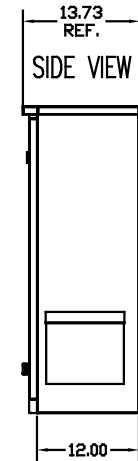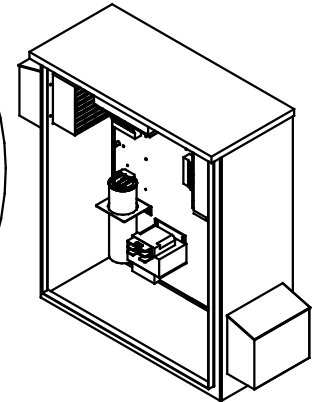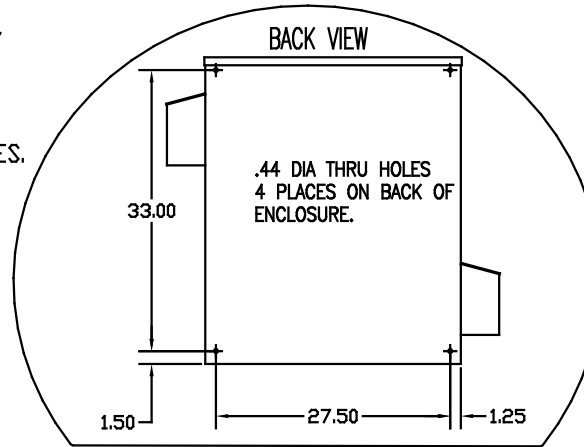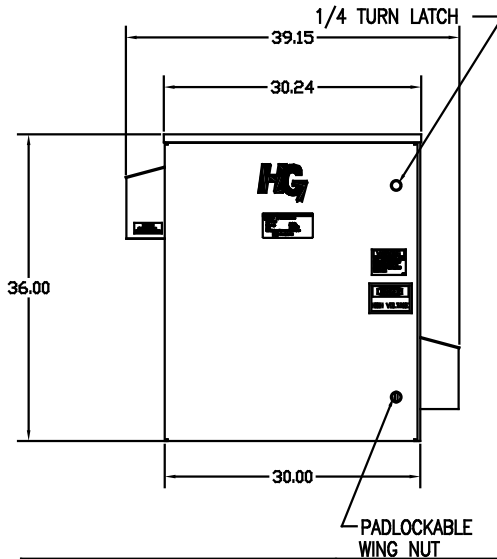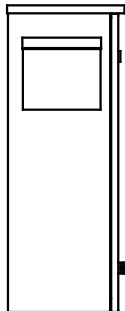

UNIT SPECIFICATIONS:					
KVAR HARMONIC	VOLT	HZ	PHASE	HP	
15	5TH	600	60	3	50
ENCLOSURE	UL TYPE 3R				
COLOR	WHITE				
APPROX.WT. LBS.	249				

SYMBOL	TCI PART NUMBER
LR	KDRG41T
TR	KTR15C65HG
CAP (15 KVAR) 1 PLACE	KCAP15C6B
XFMR.	24381
Fu1, 2, 3	11307
Fu4,6	23405
Fu5	17567

PB—POWER INPUT BLOCK:
WIRE RANGE—#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN-LB.

GROUND LUG:
WIRE RANGE—2/0 TO #6 AWG.
TIGHTENING TORQUE 120 IN-LB.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED: DIMEN. XX ±.12 .XXX±.03 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	SCALE TO FIT	DATE	APPROV	DATE	APPROV	DATE	APPROV

TCI 7878 N. 86th STREET
MILWAUKEE, WI 53224

HG50CW03ST, 50HP
600/3/60 UL TYPE 3R

DSW 02/24/09 103637DG
C

SHT. 1 of 1