SEE 26824 FOR SCHEMATIC

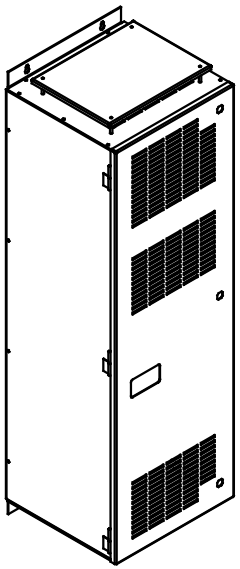

GROUND LUG:
WIRE RANGE– ONE 600MCM–4
TWO 250MCM–1/0
TIGHTENING TORQUE 500 IN–LB.

CUSTOMER
OUTPUT CONNECTION.
WIRE RANGE– ONE 600MCM–4
TWO 250MCM–1/0
TIGHTENING TORQUE 500 IN–LB.

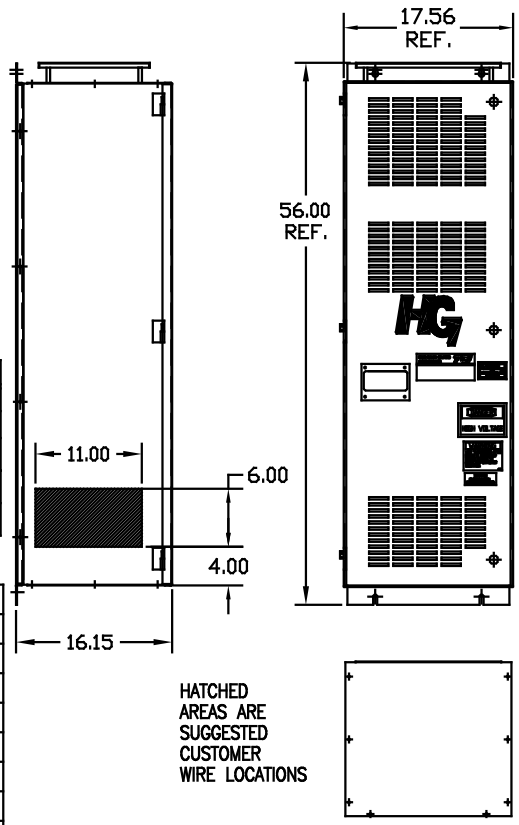

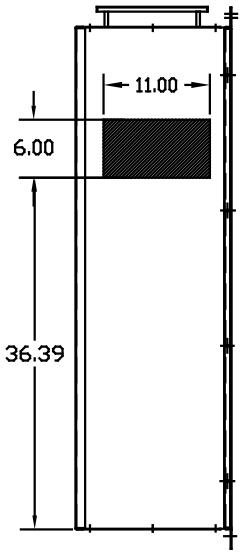

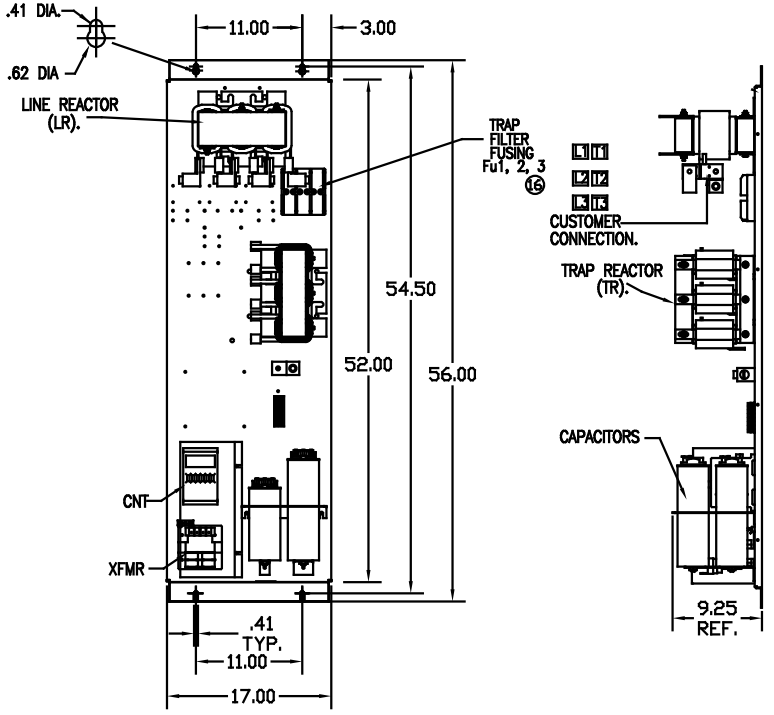

ENCLOSURE NOT SHOWN

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
25	5TH	240	60	3	75
ENCLOSURE	NEMA 1- COLOR, BLACK				
FEATURES	WITH CONTACTOR				
APPROX.WT. LBS.	288				

SYMBOL	TCI PART NUMBER
LR	KDRJ21T
TR	KTR25B65HG
CAP1 (10 KVAR)	KCAP10B6B
CAP2 (5 KVAR)	KCAP5B6B
XFMR.	23894
Fu1,2,3	11077
Fu4,6	23951
Fu5	13362
CNT	19246

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

7878 N. 86th STREET
MILWAUKEE, WI 53224

HG75BW01STC, 75HP
240/3/60, ENCL, WITH CNT

DRN. BY DSW | DATE 10/21/08 | DWG. NO. C 103597DG
SCALE TO FIT | APPVD. | SHT. 1 OF 1