UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
25	5TH	480	60	3	75
ENCLOSURE		NEMA 1- COLOR, BLACK			
APPROX.WT. LBS.		210			

SYMBOL	TCI PART NUMBER
LR	KDRG3T
TR	KTR25A65HG
CAP (15 KVAR)	KCAP15A6B
CAP (10 KVAR)	KCAP10A6B
XFMR.	23891
Fu1, 2, 3	11006
Fu4,6	21270
Fu5	13364
CNT	22980

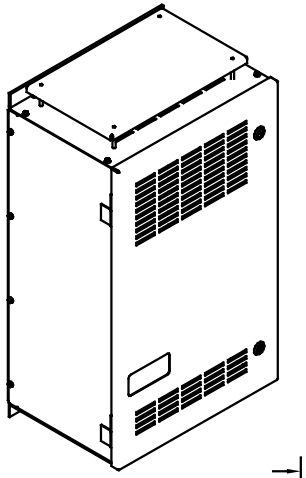

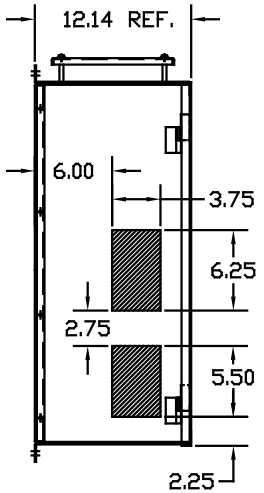

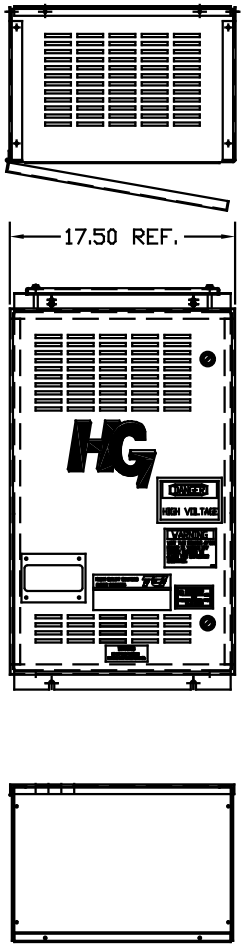

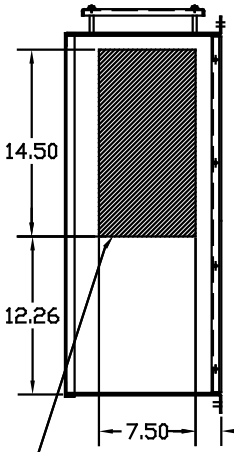

HATCHED AREAS ARE SUGGESTED CUSTOMER WIRE AND EXIT LOCATIONS (BOTTOM ENTRANCE ALTERNATE-CONSULT TCI)

CUSTOMER CONNECTIONS
WIRE RANGE-2/0-6
TIGHTENING TORQUE 120 IN-LB.

GROUND LUG:
WIRE RANGE-2/0-6
TIGHTENING TORQUE 120 IN-LB.

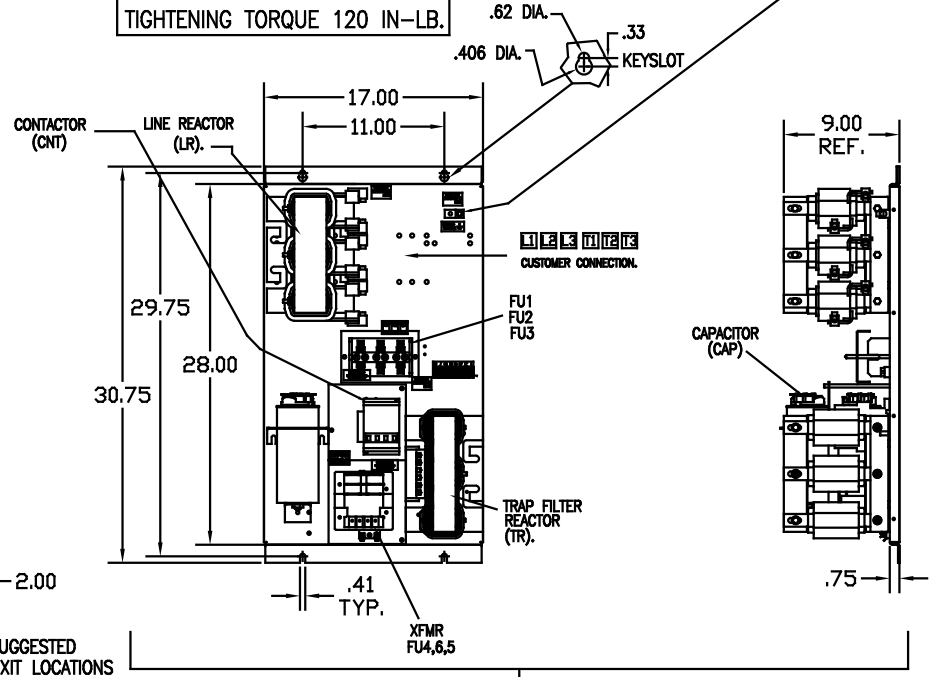

ENCLOSURE NOT SHOWN

SEE DWG# 26698 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL .XX ±.03 .XXX±.01
FRACTIONAL ±1/32
ANGULAR ±1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

HG75AW01STC 75 HP
480/3/60, ENCLOSED, WITH CNT

DRN. BY DSW | DATE 7/7/08 | DWG. NO. C 103509DG
SCALE TO FIT | APRVD. | SHT. 1 OF 1