SEE DWG# 26753 FOR SCHEMATIC

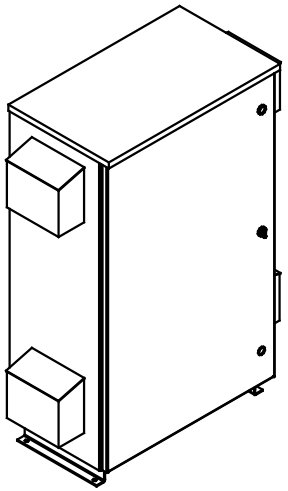

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

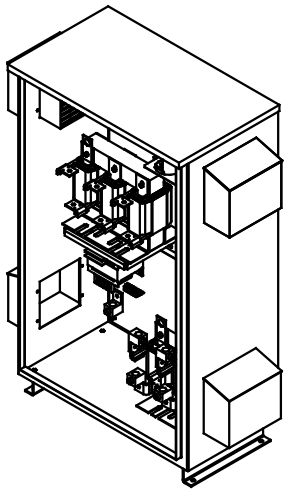

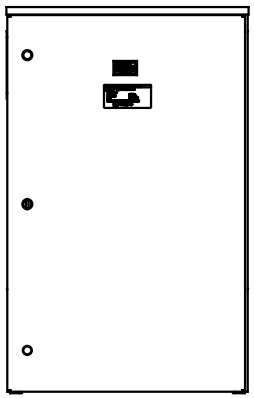

INSIDE DOOR

SIDE VIEW

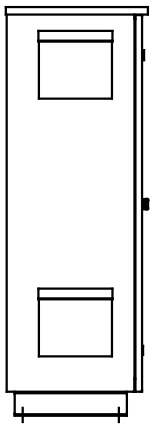

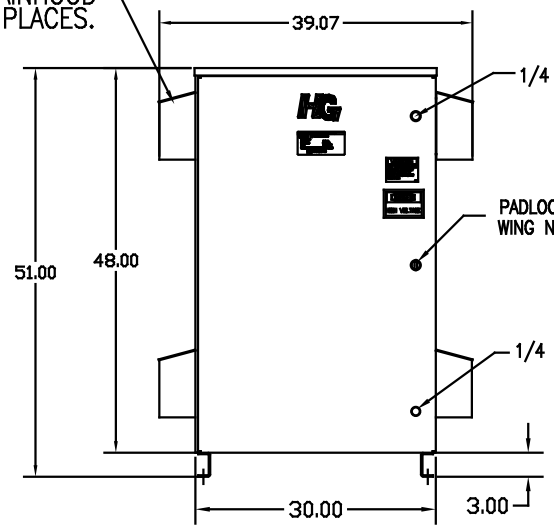

FRONT VIEW
WITHOUT DOOR

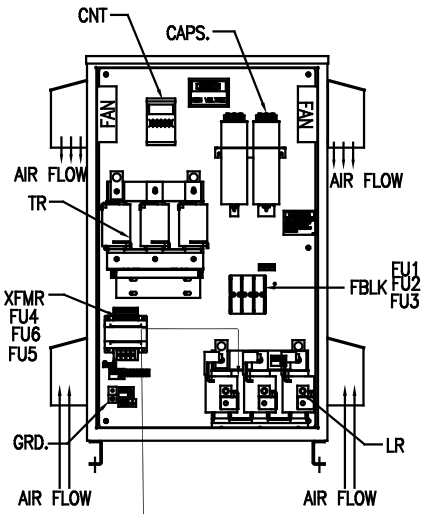

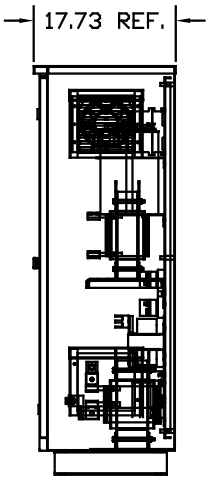

SIDE VIEW

SYMBOL	TCI PART NUMBER
LR	KDRS1T
TR	KTR60A65HGX1
CAP.1, CAP2, CAP3	KCAP20A6B
XFMR.	23899
Fu1,2,3	11305
Fu4,6	14106
Fu5	23977
CNT	19246

FRONT VIEW
WITH DOOR

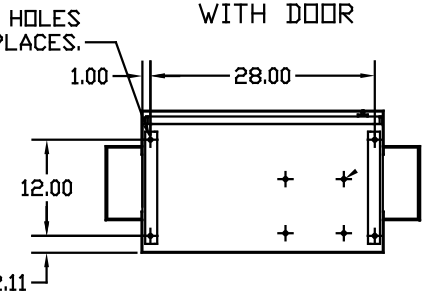

L1 L2 L3 T1 T2 T3

SUGGESTED CUSTOMER WIRE ENTRY
AND EXIT LOCATION

GROUND LUG:
WIRE RANGE- ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN-LB.

CUSTOMER CONNECTIONS
WIRE RANGE- ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN-LB.

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
60	5TH	480	60	3	200
ENCLOSURE	TYPE 3R- COLOR, WHITE				
FEATURES	CONTACTOR				
APPROX.WT. LBS	475				

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.12
.XXX±.06
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

7878 N. 86th STREET
MILWAUKEE, WI 53224

HG200AW03STC, 200HP
480/3/60 UL TYPE 3R

DRN. BY DSW | DATE 09/12/08 | DWG. NO. 103678DG
SCALE TO FIT | APPVD. | C | SHT. 1 OF 1