
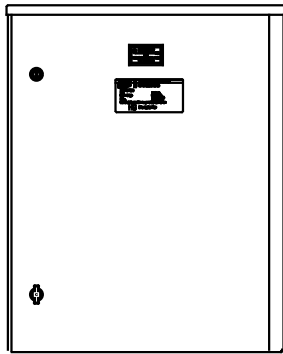
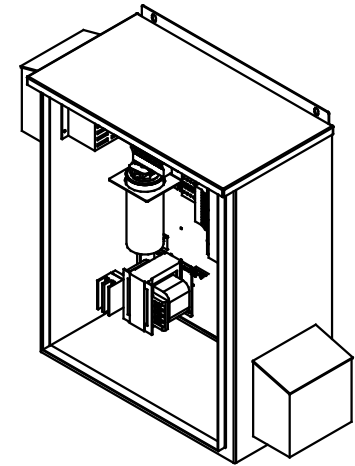
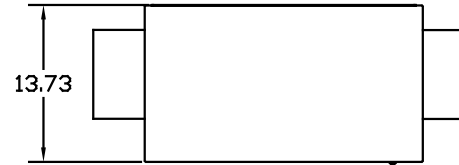



SEE DWG# 26752 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.



NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

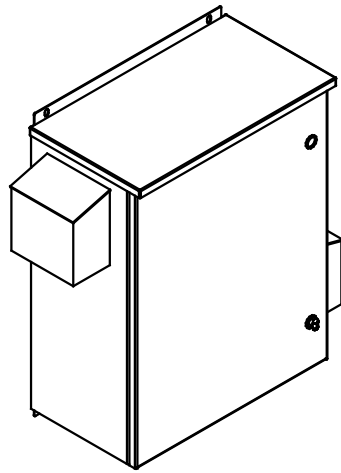

INSIDE DOOR

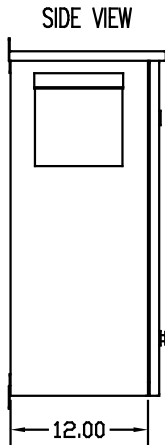

SIDE VIEW

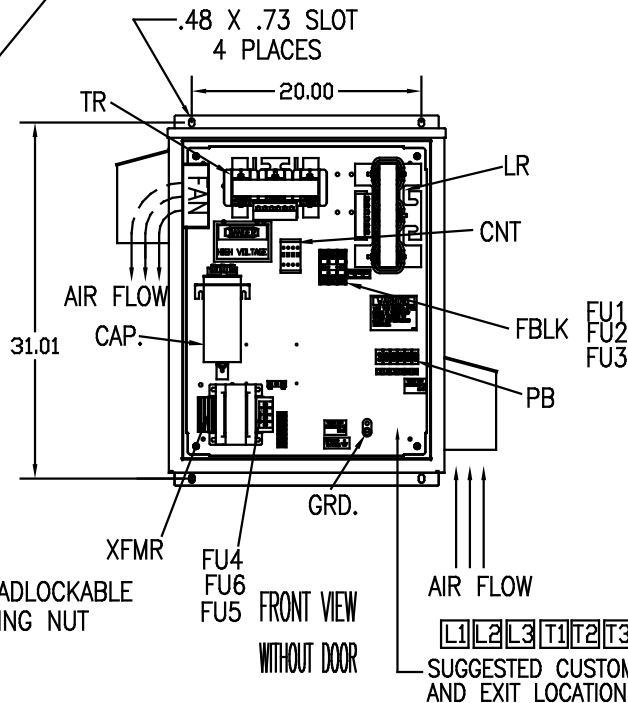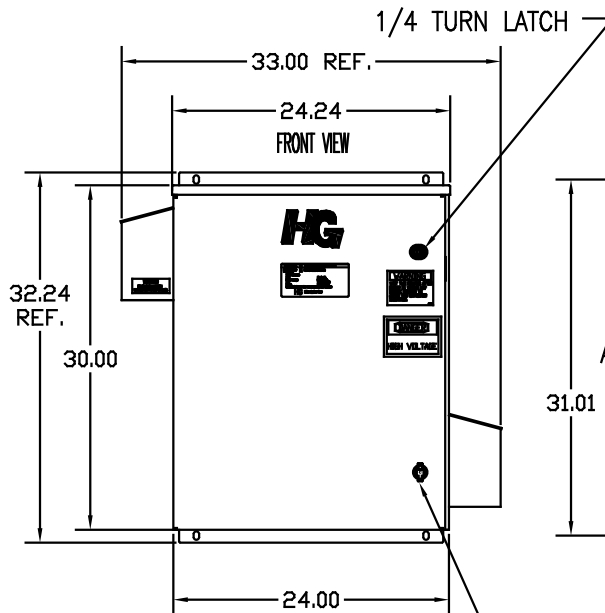

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
10	5TH	480	60	3	30
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
APPROX.WT. LBS.		153			

SYMBOL	TCI PART NUMBER
LR	KDRH1T
TR	KTR10A65HG
CAP (10 KVAR)	KCAP10A6B
XFMR.	23896
Fu1, 2, 3	11307
Fu4,6	24009
Fu5	17567
CNT	12434

PADLOCKABLE WING NUT

PB-POWER INPUT BLOCK:
WIRE RANGE-#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN.-LB.

GROUND LUG:
WIRE RANGE-1/0 TO #14 AWG.
TIGHTENING TORQUE 200 IN.-LB.

TOLERANCES EXCEPT AS NOTED				7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL	FRACTIONAL	ANGULAR	SCALE	
.XX ±.12	.XXX±.06	± 1/32	TO FIT	HG30AW03STC, 30HP 480/3/60 UL TYPE 3R DSW 08/25/08 103670DG C
		± 1/2°		