
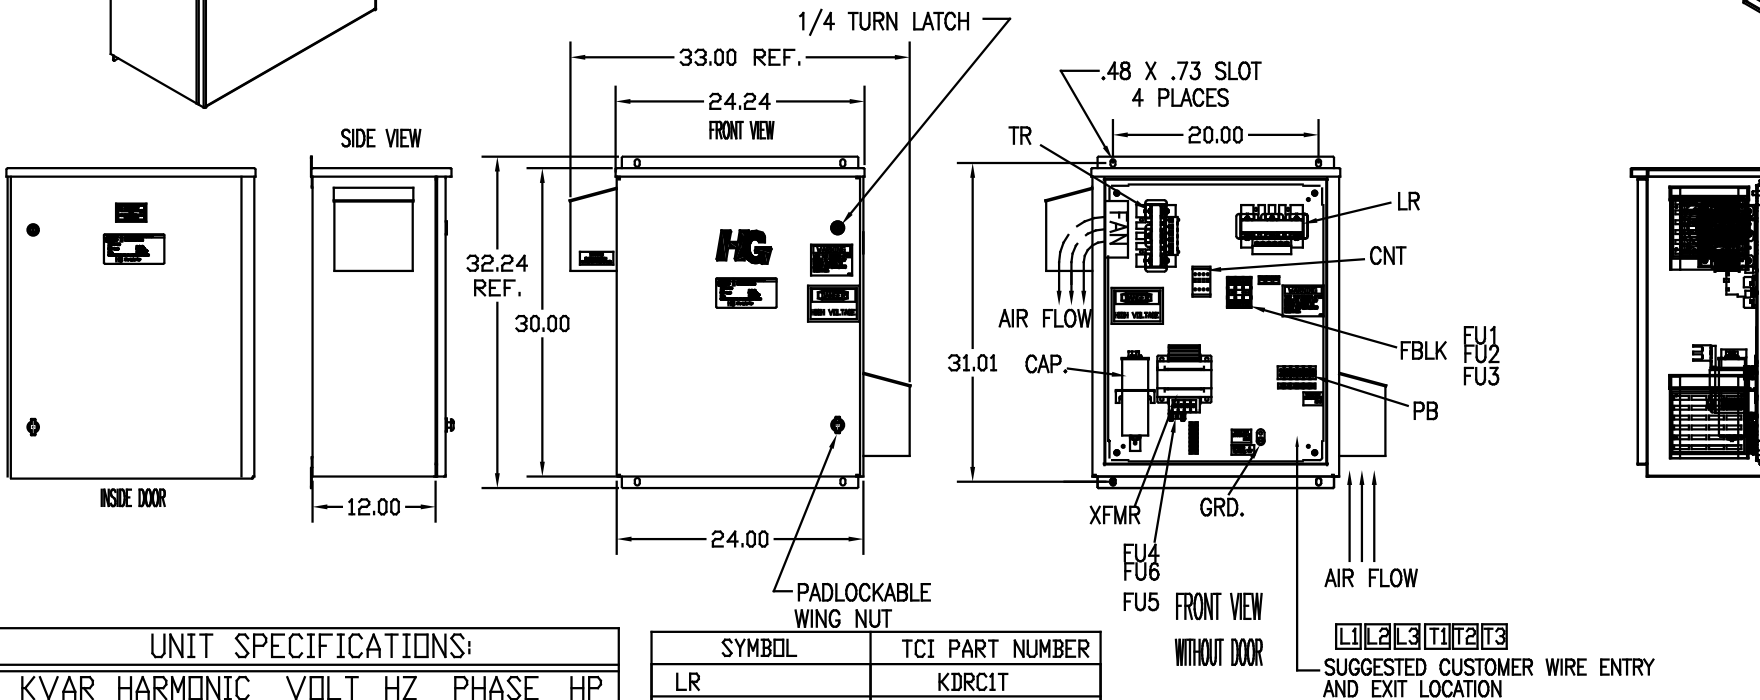
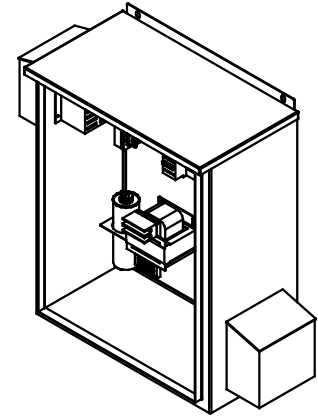


SEE DWG# 26752 FOR SCHEMATIC
 CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
 WITH UL514B FOR TYPE 3R ENCLOSURES.

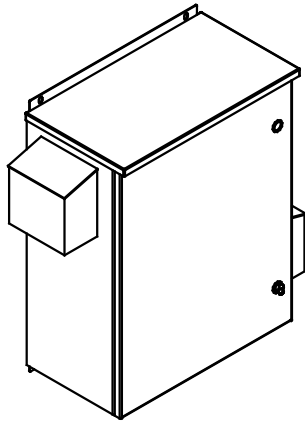

UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
3	5TH	480	60	3	7.5	
ENCLOSURE		UL TYPE 3R				
COLOR		WHITE				
APPROX.WT. LBS.		106				

SYMBOL	TCI PART NUMBER
LR	KDRC1T
TR	KTR3A65HG
CAP. (3 KVAR)	KCAP3A6A
XFMR.	23896
Fu1, 2, 3	11262
Fu4,6	24009
Fu5	17567
CNT	26739

PB-POWER INPUT BLOCK:
 WIRE RANGE-#18 TO #4 AWG.
 TIGHTENING TORQUE 20 IN-LB.

GROUND LUG:
 WIRE RANGE-1/0 TO #14 AWG.
 TIGHTENING TORQUE 200 IN-LB.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED: DECIMAL XX ±.12 .XXX±.06 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	SCALE TO FIT	DATE 8/25/08	APPROVAL C	DWG. NO. 103665DG	SHEET 1 of 1

7878 N. 86th STREET
 MILWAUKEE, WI 53224

HG8AW03STC, 7.5HP
 480/3/60 UL TYPE 3R