SEE DWG# 26972-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

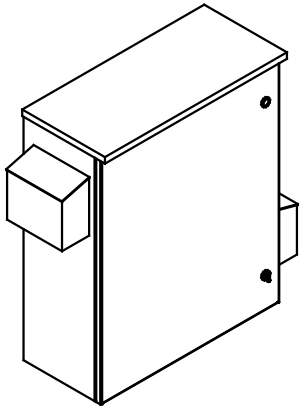

SIDE VIEW

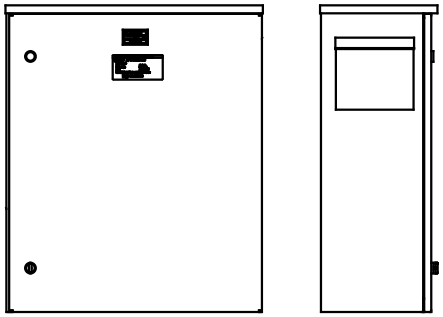

INSIDE VIEW
OF DOOR

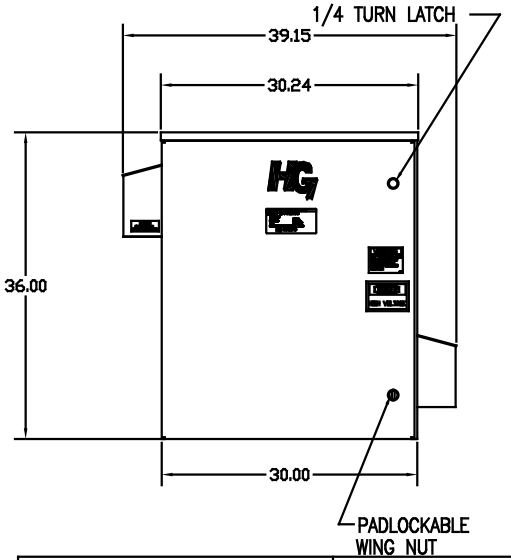


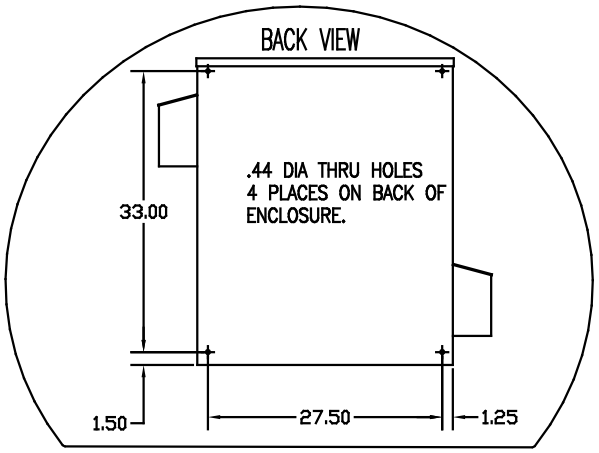


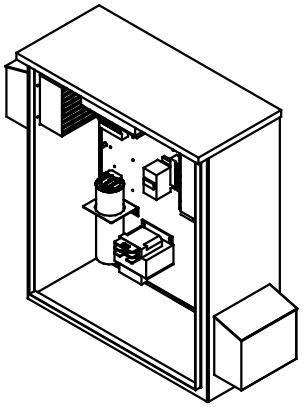

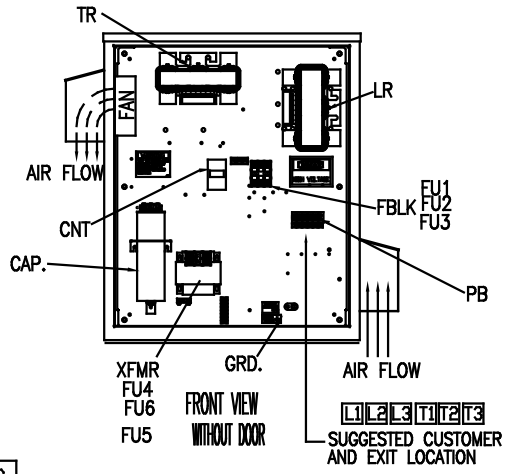


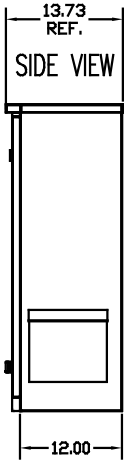


| UNIT SPECIFICATIONS: | | | | | |
|---|---|---|---|---|---|
| KVAR | HARMONIC | VOLT | HZ | PHASE | HP |
| 15 | 5TH | 600 | 60 | 3 | 50 |
| ENCLOSURE | UL TYPE 3R | | | | |
| COLOR | WHITE | | | | |
| FEATURES | CONTACTOR | | | | |
| APPROX.WT. LBS. | 251 | | | | |

| SYMBOL | TCI PART NUMBER |
|---|---|
| LR | KDRG41T |
| TR | KTR15C65HG |
| CAP (15 KVAR) 1 PLACE | KCAP15C6B |
| XFMR. | 24381 |
| Fu1, 2, 3 | 11307 |
| Fu4,6 | 23405 |
| Fu5 | 17567 |
| CNT | 26550 |

PB-POWER INPUT BLOCK:
WIRE RANGE-#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN-LB.

GROUND LUG:
WIRE RANGE-2/0 TO #6 AWG.
TIGHTENING TORQUE 120 IN-LB.

| NO | REVISION | DATE | BY |
|---|---|---|---|
| | | | |

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.12
.XXX±.03
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

7878 N. 86th STREET
MILWAUKEE, WI 53224

HG50CW03STC, 50HP
600/3/60 UL TYPE 3R

DRN. BY DSW | DATE 02/24/09 | DWG. NO. C 103692DG
SCALE TO FIT | APPVD. | SHT. 1 OF 1