



SEE DWG# 26972-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.







NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.

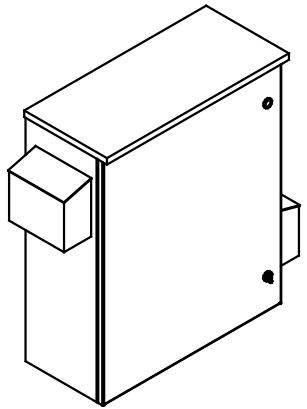

SIDE VIEW



INSIDE VIEW OF DOOR

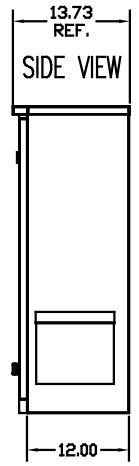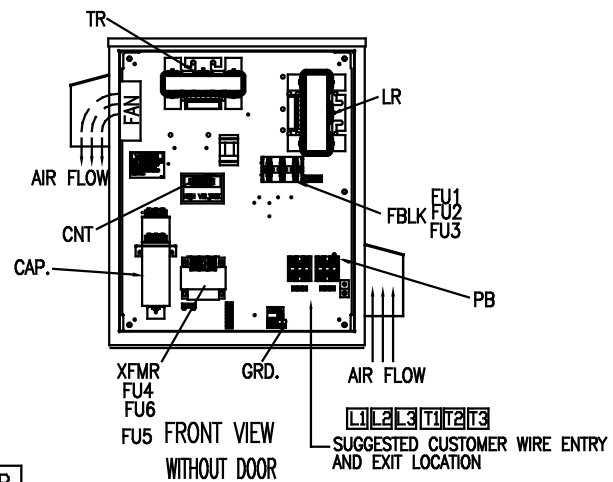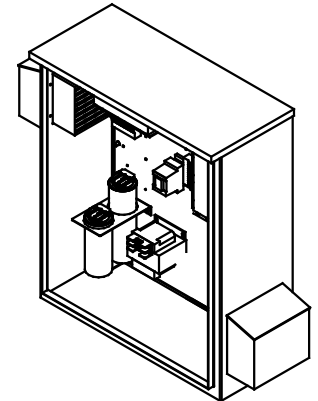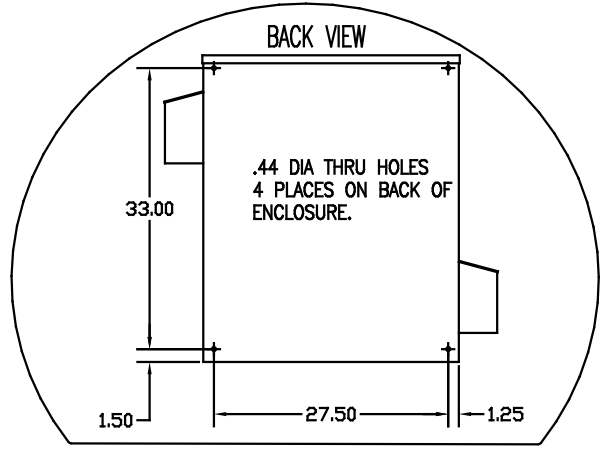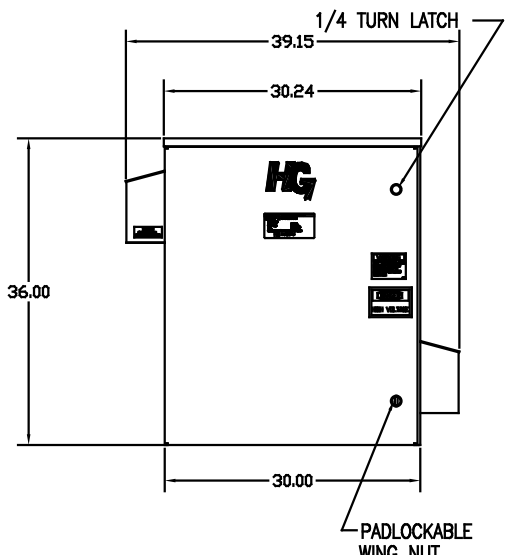

UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
25	5TH	600	60	3	75	
ENCLOSURE		UL TYPE 3R				
COLOR		WHITE				
FEATURES		CONTACTOR				
APPROX. WT. LBS.		271				

SYMBOL	TCI PART NUMBER
LR	KDRG43T
TR	KTR25C65HG
CAP (15 KVAR) 1 PLACE	KCAP15C6B
CAP (10 KVAR) 1 PLACE	KCAP10C6B
XFMR.	24381
Fu1, 2, 3	12515
Fu4,6	23405
Fu5	17567
CNT	26738

PB-POWER INPUT BLOCK:
 2/0 AWG thru 6 AWG 120 IN-LBS. MAX.
 8 AWG 40 IN-LBS. MAX.
 10 AWG thru 14 AWG 35 IN-LBS. MAX.

GROUND LUG:
 WIRE RANGE- 250MCM-6
 TIGHTENING TORQUE 275 IN-LB.

				TOLERANCES EXCEPT AS NOTED:		7878 N. 86th STREET MILWAUKEE, WI 53224	
				XX ±.12 .XXX±.03 FRACTIONAL ± 1/32 ANGULAR ± 1/2°			
				NO		HG75CW03STC, 75HP 600/3/60 UL TYPE 3R	
REVISION				DATE	BY	DSW 02/24/09 SCALE TO FIT	DWG. NO. 103694DG SHT. 1 of 1