


SEE DWG# 26689 FOR SCHEMATIC

UNIT SPECIFICATIONS:					
KVAR HARMONIC	VOLT	HZ	PHASE	HP	
3	5TH	480	60	3	10
ENCLOSURE			WHITE OPEN PANEL		
APPROX.WT. LBS.		45			

SYMBOL	TCI PART NUMBER
LR	KDRE1T
TR	KTR3A65HG
CAP. (3 KVAR)	KCAP3A6A
XFMR.	23891
Fu1, 2, 3	11262
Fu4,6	21270
Fu5	13364
CNT	12434

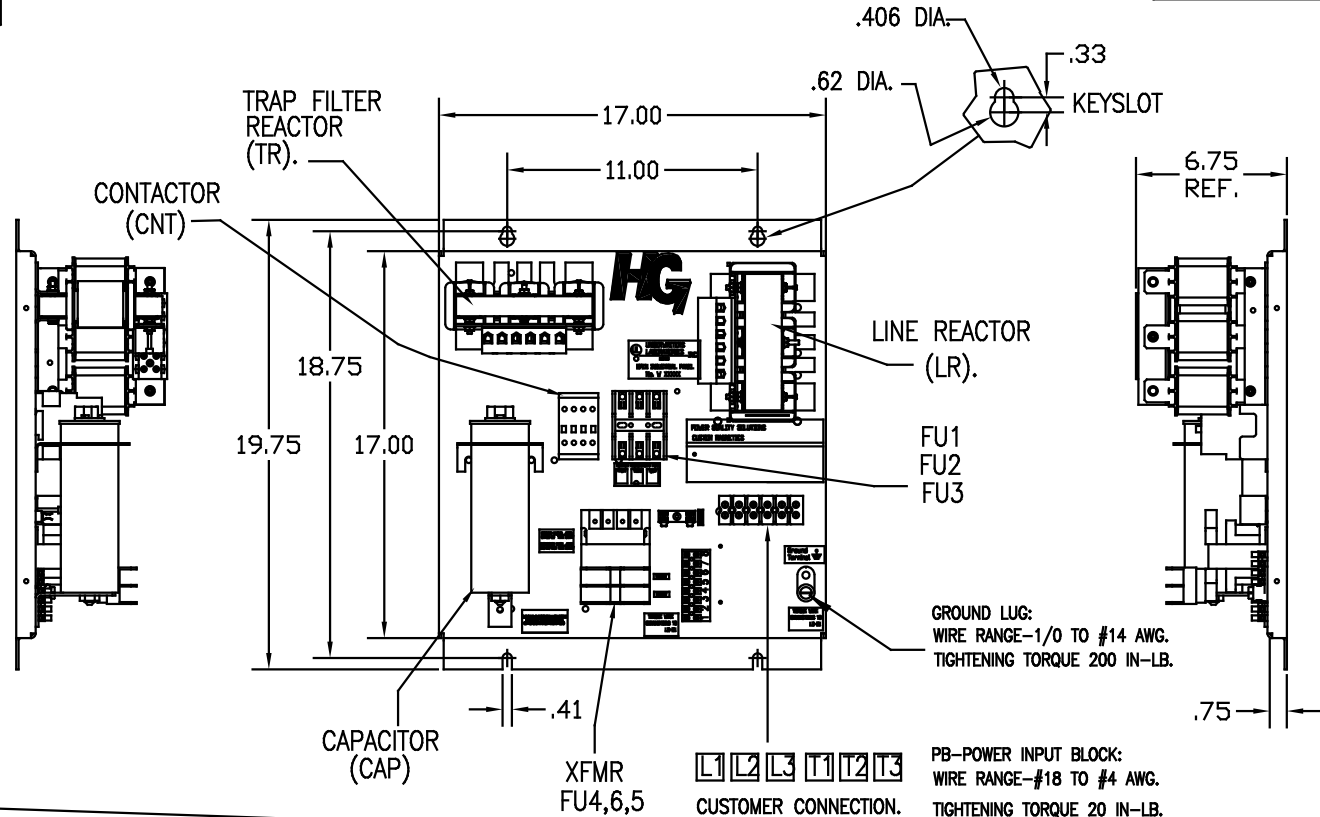

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

HG10AW00STC, 10 HP
480/3/60, OPEN, WITH CNT

DRN BY DSW DATE 7/01/08 DWG. NO. 103525DG
SCALE TO FIT APPRVD. B SHT. 1 of 1

PB-POWER INPUT BLOCK: WIRE RANGE-#18 TO #4 AWG. TIGHTENING TORQUE 20 IN-LB.
CUSTOMER CONNECTION. TIGHTENING TORQUE 20 IN-LB.