




GROUND LUG:  
WIRE RANGE-TWO 350MCM-4  
TIGHTENING TORQUE 275 IN-LB.

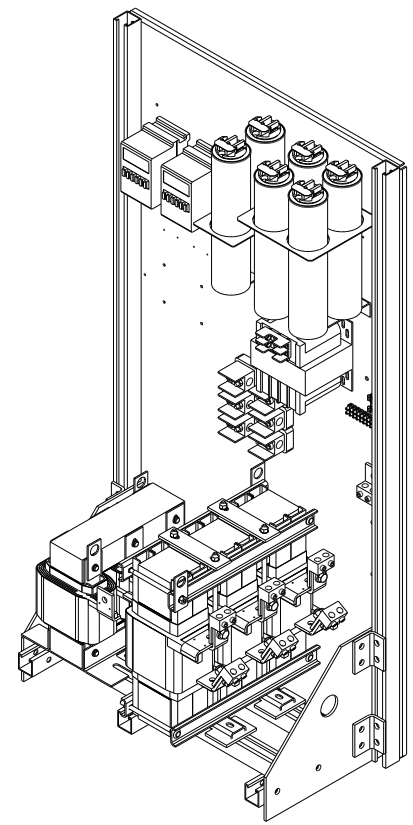

CUSTOMER OUTPUT CONNECTION  
WIRE RANGE-TWO 350MCM-4  
TIGHTENING TORQUE 275 IN-LB.

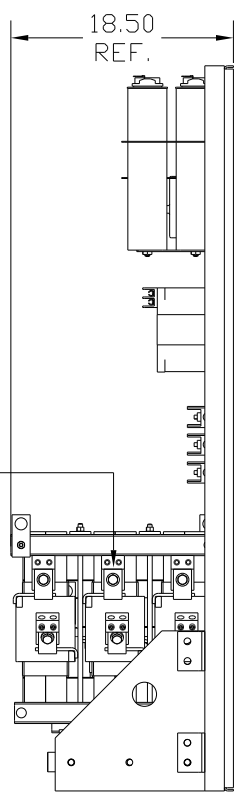

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
120	5TH	600	60	3	400
OPEN PANEL		WHITE			
FEATURES		WITH CONTACTOR			
APPROX.WT. LBS.		545			
SYMBOL	TCI PART NUMBER				
LR	KDRX43T				
TR	KTR120C65HG				
(20 KVAR) 6 PLACES.	KCAP20C6B				
Fu1a;2a;3a	11175				
Fu4,6	24390				
Fu5	23977				
CNT	19246				
XFMR	25292				

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

FOR SCHEMATIC SEE DWG# 26879

					TOLERANCES EXCEPT AS NOTED: DECIMAL	7878 N. 86th STREET MILWAUKEE, WI 53224 <b>HG400CWO0STC, HG7, W/CNT 400 HP, 600/3/60</b> DRW. BY DSW DATE 4/27/09 DWG. NO. 103581DG SCALE TO FIT APPROV. CHT.1 OF 1
					.XX ±.03	
					.XXX±.01	
					FRACTIONAL ± 1/32	
					ANGULAR ± 1/2°	
NO	REVISION	DATE	BY			