
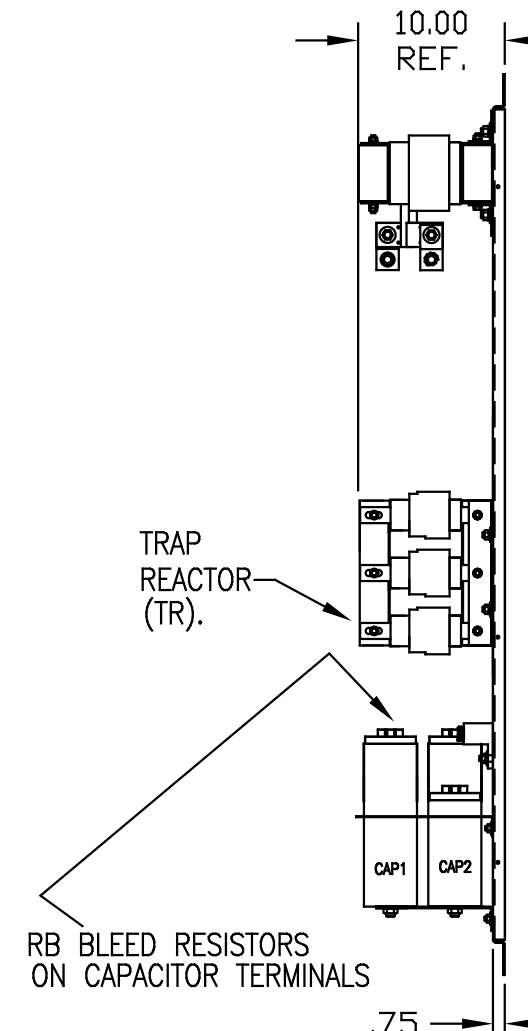


UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
25	5TH	240	60	3	75	
ENCLOSURE		WHITE OPEN PANEL				
APPROX.WT. LBS.		180				

SYMBOL	TCI PART NUMBER
LR	KDRJ21T
TR	KTR25B65HG
CAP1 5 KVAR	17812
CAP2, 3 10 KVAR	17813
Fu1, 2, 3	11077

CUSTOMER CONNECTIONS
 WIRE RANGE- ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:
 WIRE RANGE- ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

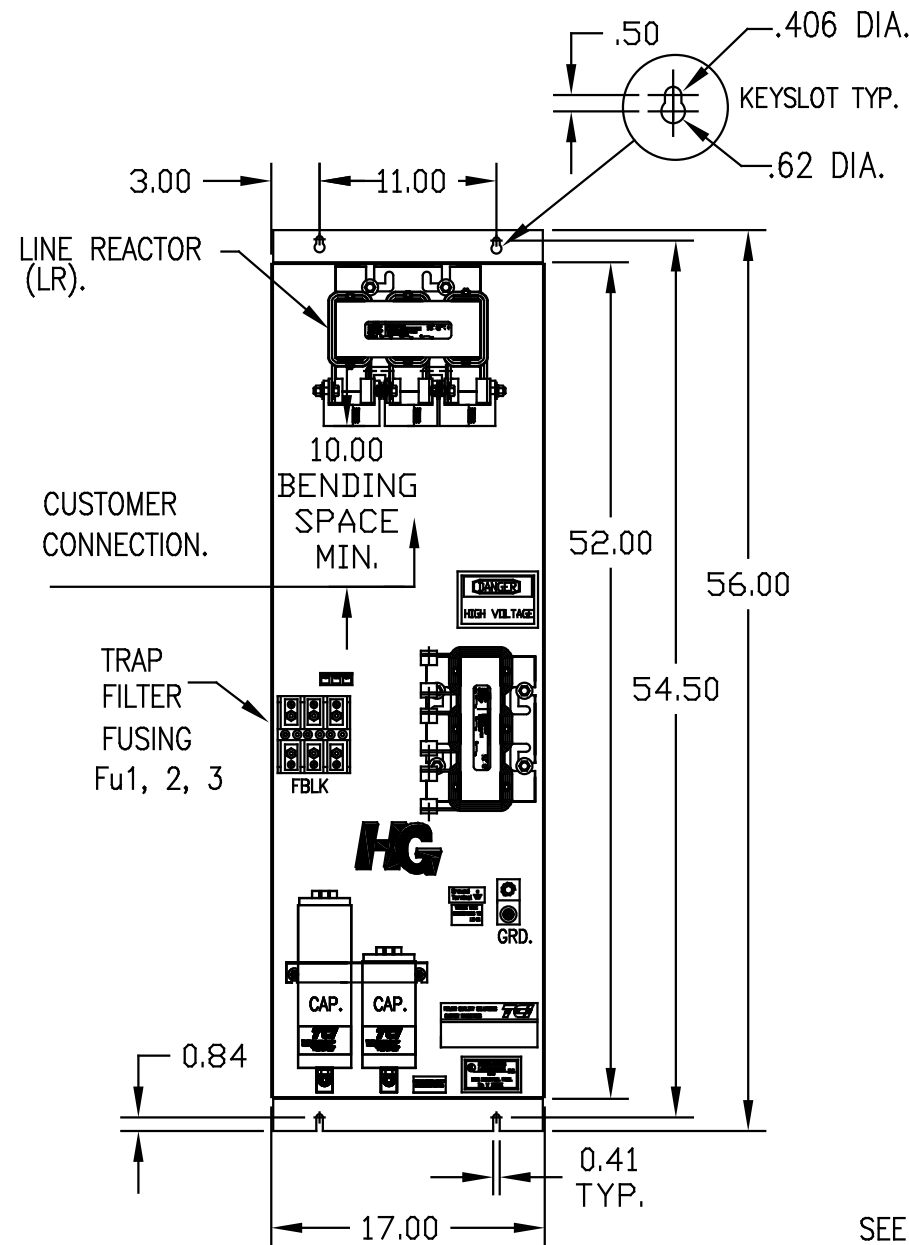

SEE 25179 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

- L1
- L2
- L3
- T1
- T2
- T3

				TOLERANCES EXCEPT AS NOTED:	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ±.03	HG75BW00ST HG7 STANDARD 75HP, 240/3/60 OPEN
				.XXX ±.01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY	SCALE TO FIT	DESIGNED BY DSW DATE 03/18/05 DRAWING NO. 102522DG SHEET 1 OF 1