




UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
180	5TH	480	60	3	600
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		950			
SYMBOL		TCI PART NUMBER			
LR		KDRY1T			
TR		KTR180A65HG			
CAP1 - 9 (20KVAR)		23123			
Fu1, 2, 3		12596			

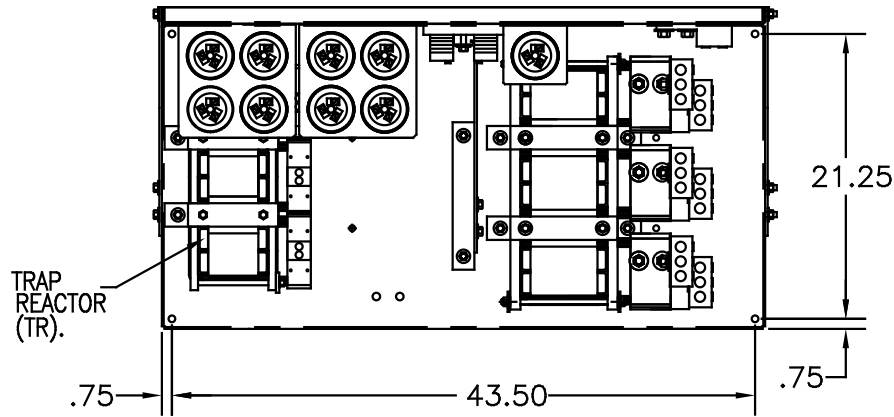


CUSTOMER CONNECTIONS:
 WIRE RANGE—THREE 600MCM-2
 TIGHTENING TORQUE 375 IN-LB.

GROUND LUG:
 WIRE RANGE—THREE 600MCM-2
 TIGHTENING TORQUE 375 IN-LB.

SEE 25078 FOR SCHEMATIC

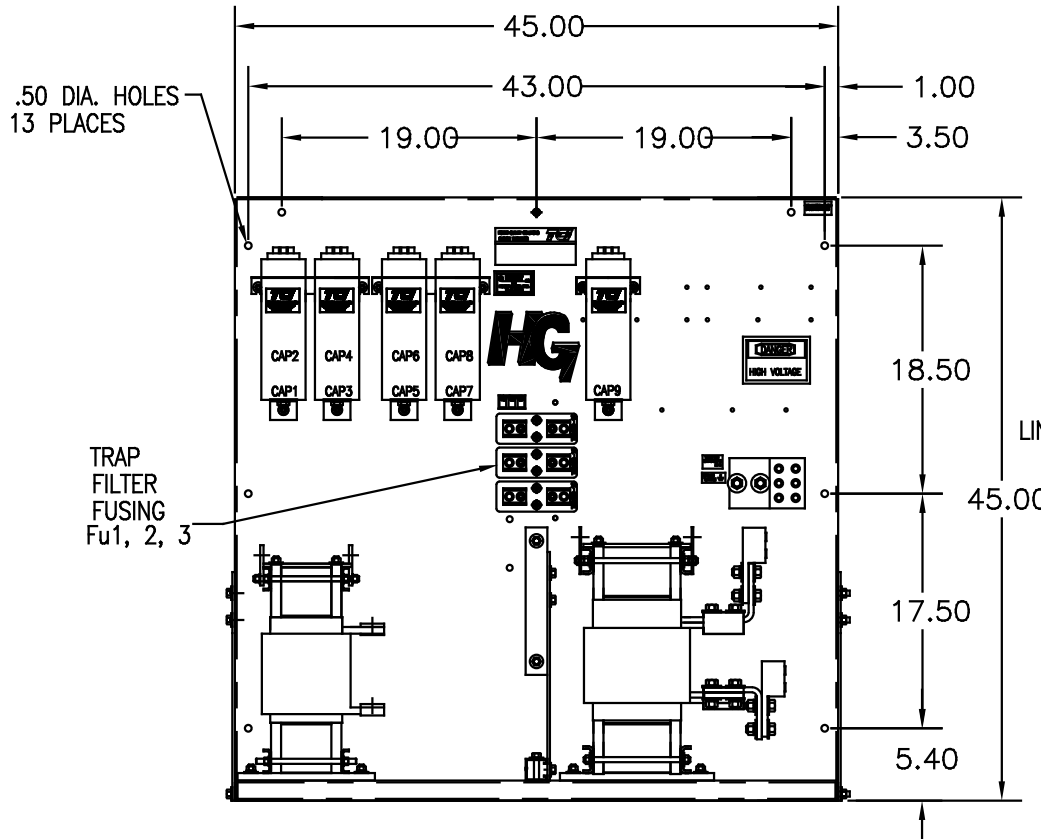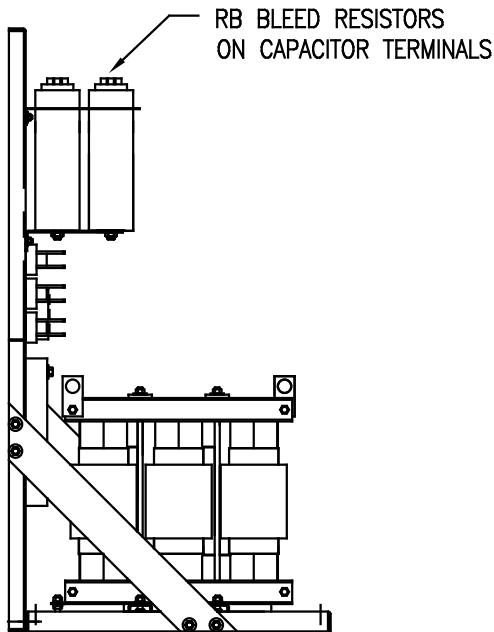

CUSTOMER CONNECTIONS:
 L1 L2 L3
 T1 T2 T3

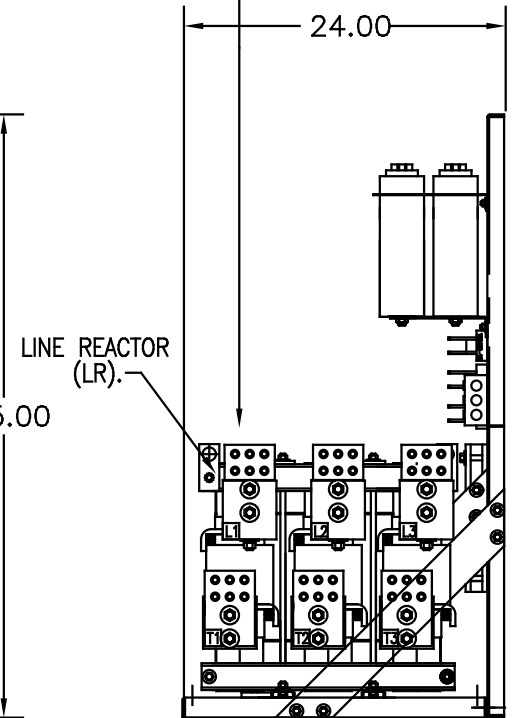

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (UNLESS AS NOTED)	DESIGN
				.XX ±.03	
				.XXX ±.01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	
				NO	

7878 N. 86th STREET MILWAUKEE, WI 53224	
HG600AW00ST HG7 STANDARD 600HP, 480/3/60 OPEN	
DSN. BY DSJ DATE 05/25/05 SCALE TO FIT	DSN. NO. 102686DG C SHT. 1 of 1