


RB BLEED RESISTORS
ON CAPACITOR TERMINALS

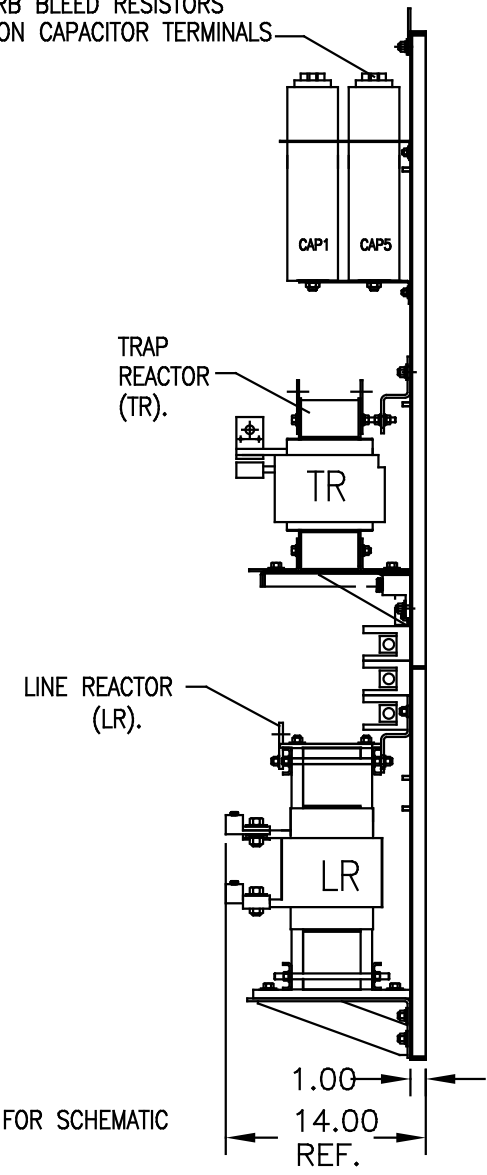

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
90	5TH	600	60	3	300
ENCLOSURE			WHITE OPEN PANEL		
APPROX.WT. LBS.			520		

SYMBOL	TCI PART NUMBER
LR	KDRX41T
TR	KTR90C65HG
CAP1, CAP2, CAP3	
CAP4. (20KVAR)	18612
CAP5. (10KVAR)	17816
Fu1, 2, 3	11170


CUSTOMER CONNECTIONS:
WIRE RANGE—TWO 350MCM-4
TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:
WIRE RANGE—ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN-LB.

CUSTOMER IS RESPONSIBLE FOR PROPER
COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

CUSTOMER CONNECTIONS:



SEE 25115 FOR SCHEMATIC

TOLERANCES (UNLESS AS NOTED)				TCD	7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL	FRACTIONAL	ANGULAR	WELD		
.XX ±.03				HG300CW00ST, HG7 STANDARD 300HP, 600/3/60 OPEN	DRA. BY DSW
.XXX ±.01					
	± 1/32			LINE NO. C 102500DG	APP'D.
	± 1/2			SOLE TO FIT	SHT. 1 OF 1
NO	REVISION	DATE	BY		