

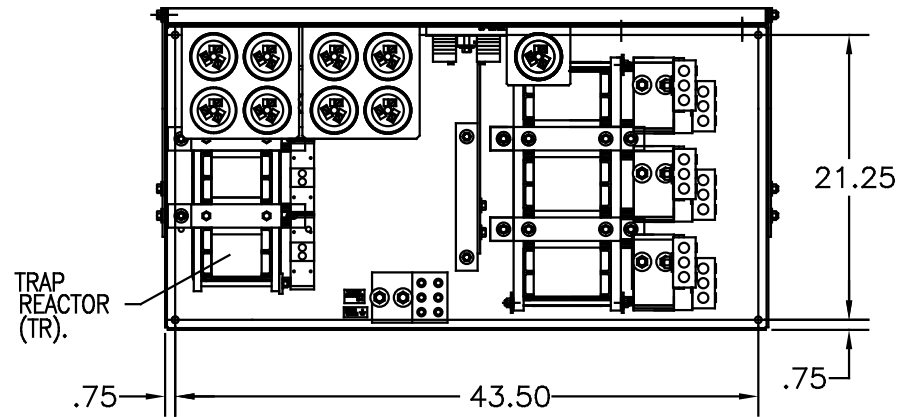


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
180	5TH	600	60	3	600
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		950			
SYMBOL		TCI PART NUMBER			
LR		KDRX42T			
TR		KTR180C65HG			
CAP1 - 9 (20KVAR)		18612			
Fu1, 2, 3		13232			

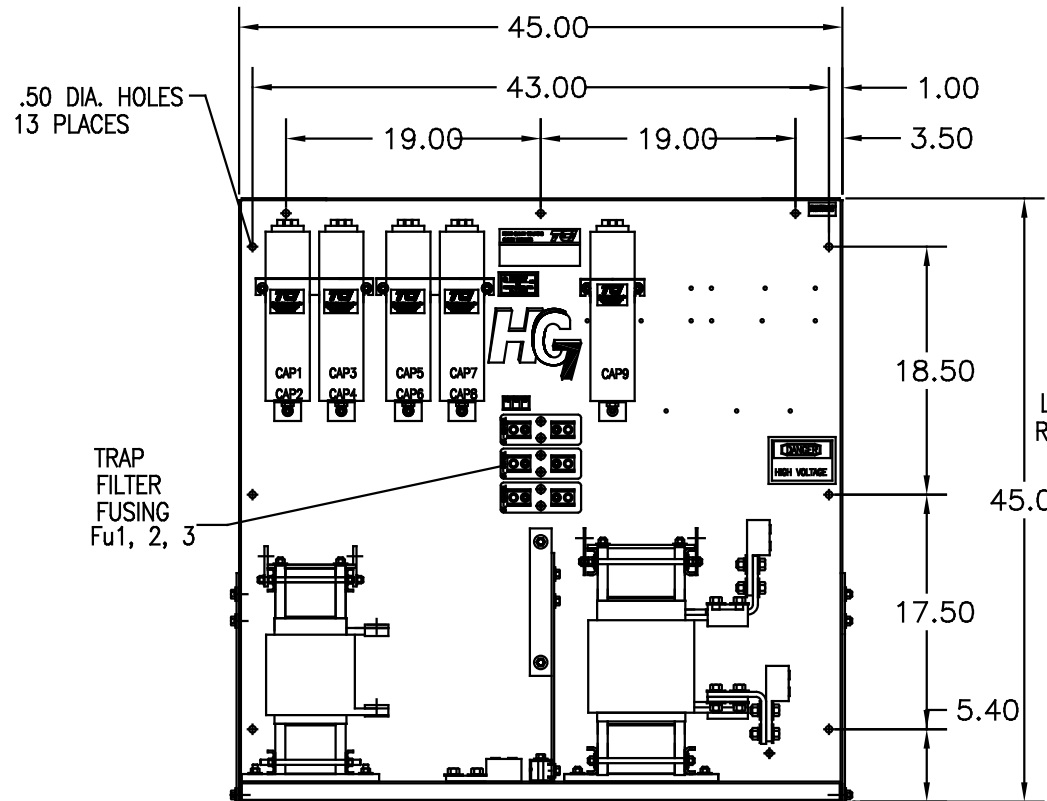


CUSTOMER CONNECTIONS:  
 WIRE RANGE-THREE 600MCM-2  
 TIGHTENING TORQUE 375 IN-LB.  
 GROUND LUG:  
 WIRE RANGE-THREE 600MCM-2  
 TIGHTENING TORQUE 375 IN-LB.

SEE 25115 FOR SCHEMATIC

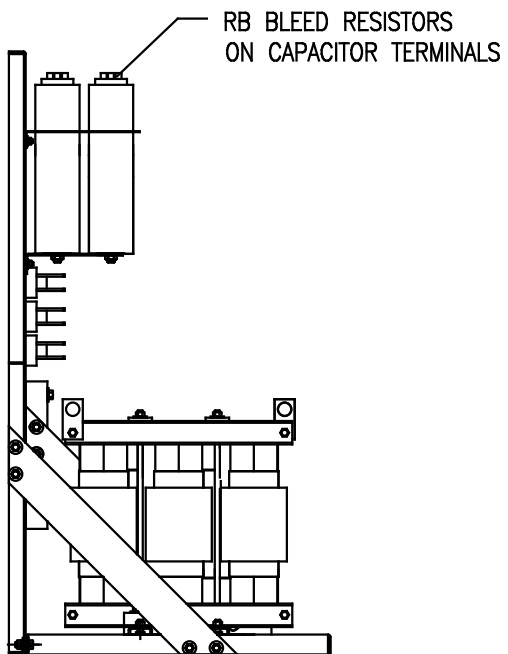

CUSTOMER CONNECTIONS:  
 L1 L2 L3  
 T1 T2 T3

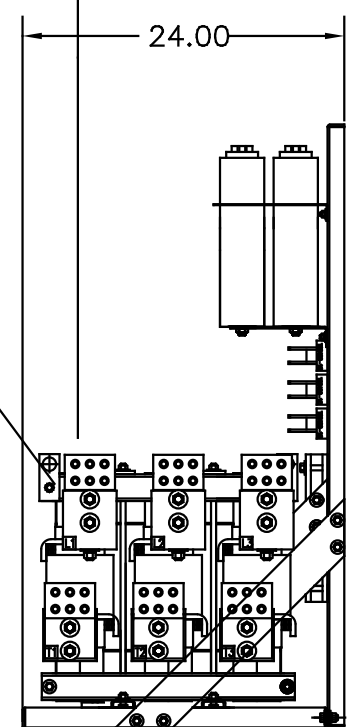

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS.  
 CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (UNLESS AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ±.03		HG600CW00ST HG7 STANDARD 600HP, 600/3/60 OPEN DRW. BY DSW DATE 05/23/05 DRW. NO. C 102700DG SCALE TO FIT APPROV.	
				.XXX±.01			
				FRACTIONAL ± 1/32			
				ANGULAR ± 1/2°			
NO.	REVISION	DATE	BY			SHT. 1 of 1	