



.187 DIA HOLE
(4 PLACES)

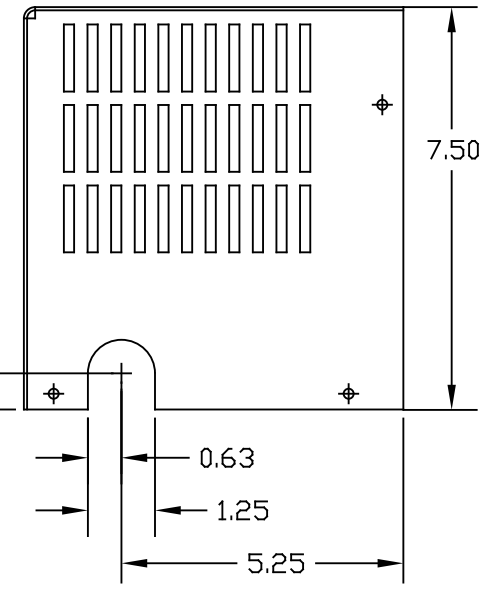


TCI PERFORMANCE AND PROTECTION FOR DRIVES.
 TRANS-COIL, INC. MILWAUKEE, WI
 WWW.TRANSCOIL.COM 800-824-8282
 KDR Drive Reactor CATALOG # MOTOR HP AMPS
 3PH, 50/60Hz, 690V Max, A Max, RthS
 DATE CODE

TCI
 PERFORMANCE AND PROTECTION FOR DRIVES.
 TRANS-COIL, INC.
 1-800-824-8282

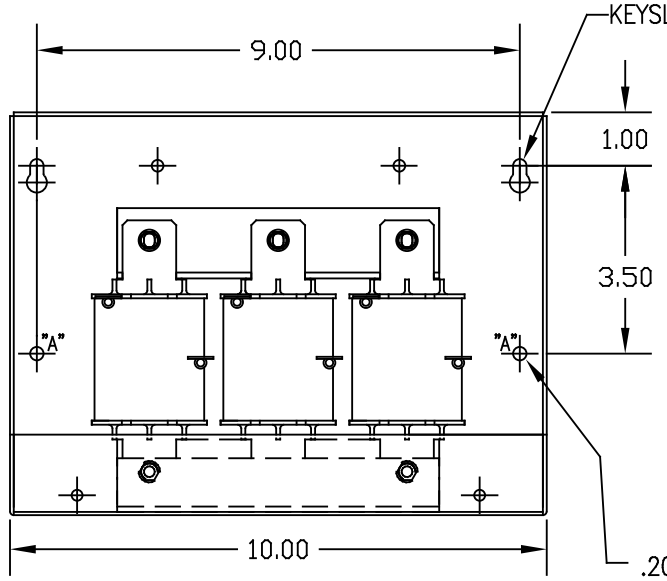

KEYSLOT FOR #10 SCREW
(2 PLACES)
COVER IN

LOCATION FOR CUSTOMERS
CONDUIT FITTINGS
(BOTH SIDES)

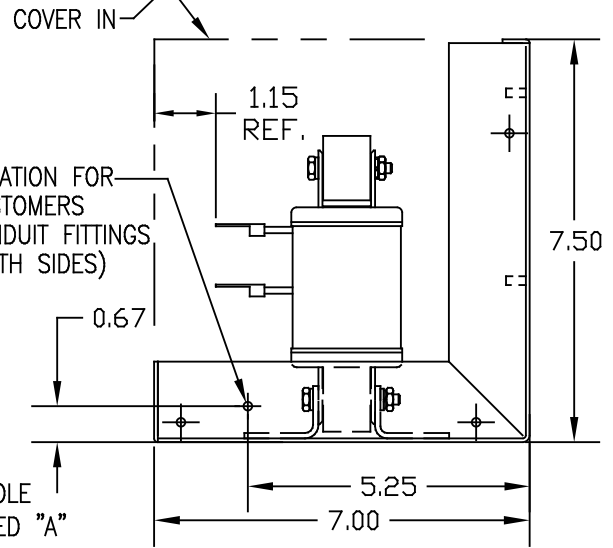

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

VOLTAGE	NEC MOTOR HP	CATALOG NO	MOTOR HP AMPS	AMPS MAX	APPROX WT-LBS	TERMINAL HOLE SIZE
690V	20	KDRD32PC2V	22	25	16	.25

TOLERANCES EXCEPT AS NOTED			
DECIMAL	XX ± .03	XXX ± .010	
FRACTIONAL	± 1/16		
ANGULAR	± 1/2°		
NO	REVISION	DATE	BY

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
 KDR OUTPUT REACTORS 690V (FRAME D) NEMA 1
 DWG. NO. C KDRD32PC2VDG
 SHT. 1 OF 1
 DATE 03/27/07
 SCALE TO FIT