


KEYSLOTS FOR 1/4-20 SCREWS 2 PLACES

COVER IN PLACE

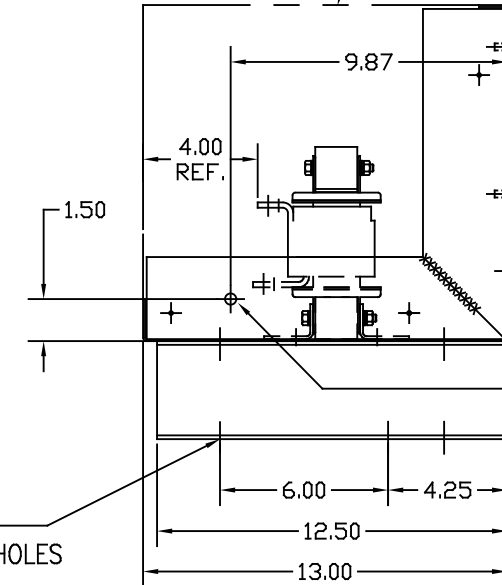

LOCATION FOR CUSTOMERS CONDUIT FITTING (BOTH SIDES)

.44 DIA. 4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

VOLTAGE	NEC MOTOR HP	CATALOG NO	MOTOR HP	AMPS	APPROX	TERMINAL	TOLERANCES EXCEPT AS NOTED		7878 N. 86th STREET MILWAUKEE, WI 53224 KDR OUTPUT REACTORS 690V (FRAME F) NEMA 1
690V	MOTOR HP		AMPS	MAX	WT-LBS	HOLE SIZE.	DECIMAL	<small>DRN. BY</small> DSW <small>DATE</small> 03/27/07 <small>DWG. NO.</small> C <small>SCALE</small> TO FIT <small>APPROV.</small>	
OUTPUT	100	KDRF33PC4V	99	110	65	.28		<small>FRACATIONAL</small> ± 1/16 <small>ANGULAR</small> ± 1/2°	<small>NO.</small> <small>REVISION</small> <small>DATE</small> <small>BY</small> <small>SCALE</small> TO FIT <small>APPROV.</small>