


KEYSLOTS FOR  
1/4-20 SCREWS  
2 PLACES

COVER IN  
PLACE

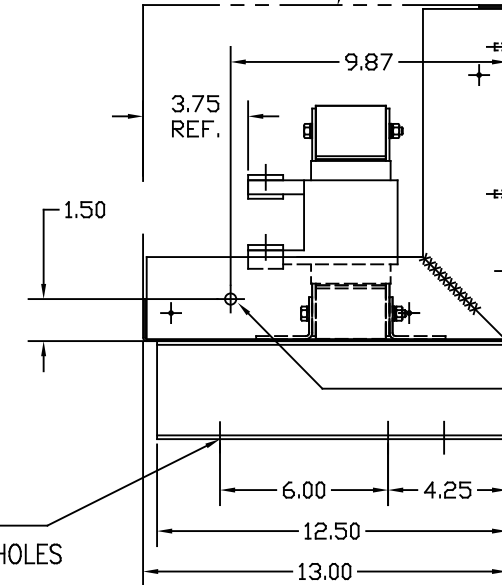

LOCATION FOR  
CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

.44 DIA.  
4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

VOLTAGE	NEC MOTOR HP	CATALOG NO	MOTOR HP AMPS	AMPS MAX	APPROX WT-LBS	TERMINAL HOLE SIZE
690V	250	KDRG31PC4V	242	250	95	.44

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL	XX ± .03	XXX ± .010	
FRACTIONAL	± 1/16		
ANGULAR	± 1/2°		
NO	REVISION	DATE	BY

**TCI** 7878 N. 86th STREET  
MILWAUKEE, WI 53224

KDR OUTPUT REACTORS 690V  
(FRAME G) NEMA 1

DRN BY DSW DATE 03/27/07 DWG. NO. CKDRG31PC4VDG  
SCALE TO FIT APPRVD SHT. 1 OF 1