
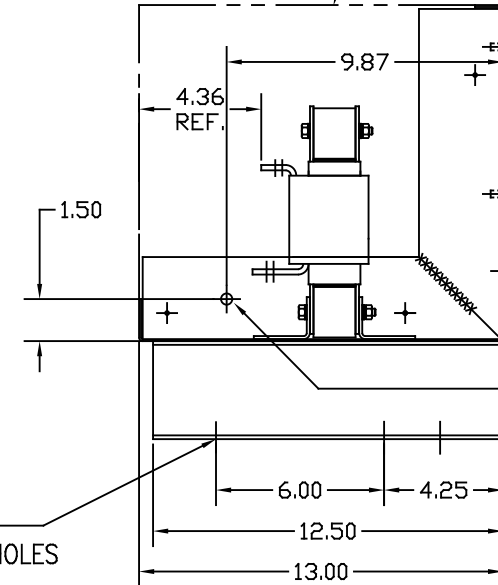


.328 DIA.  
2 HOLES

.44 DIA.  
4 MTG. HOLES

KEYSLOTS FOR  
1/4-20 SCREWS  
2 PLACES

COVER IN  
PLACE

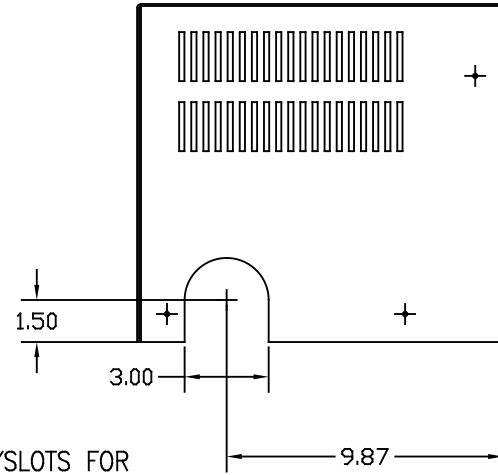

LOCATION FOR  
CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

VOLTAGE	NEC MOTOR HP	CATALOG NO	MOTOR HP AMPS	AMPS MAX	APPROX WT-LBS	TERMINAL HOLE SIZE
690V	125	KDRH31PC4V	125	130	75	.28

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL	XX ± .03	XXX ± .010	
FRACTIONAL	± 1/16		
ANGULAR	± 1/2°		
NO	REVISION	DATE	BY

**TCI** 7878 N. 86th STREET  
MILWAUKEE, WI 53224

KDR OUTPUT REACTORS 690V  
(FRAME H) NEMA 1

DRN BY DSW DATE 03/27/07 DWG. NO. KDRH31PC4V/DG  
SCALE TO FIT APPRVD SHT. 1 OF 1