
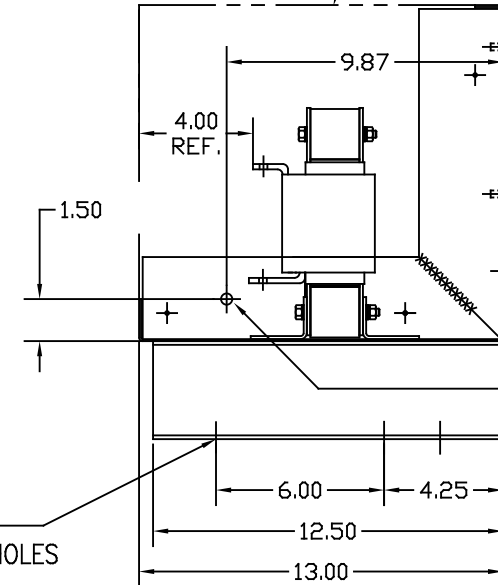


.328 DIA.
2 HOLES

.44 DIA.
4 MTG. HOLES

KEYSLOTS FOR
1/4-20 SCREWS
2 PLACES

COVER IN
PLACE

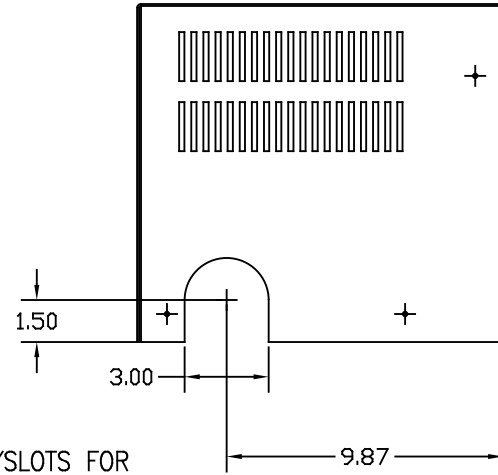

LOCATION FOR
CUSTOMERS
CONDUIT FITTING
(BOTH SIDES)

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

VOLTAGE	NEC MOTOR HP	CATALOG NO	MOTOR HP AMPS	AMPS MAX	APPROX WT-LBS	TERMINAL HOLE SIZE
690V	150	KDRI31PC4V	144	160	85	.28

TOLERANCES EXCEPT AS NOTED				7878 N. 86th STREET MILWAUKEE, WI 53224	
DECIMAL	XX ± .03	XXX ± .010		KDR OUTPUT REACTORS 690V (FRAME I) NEMA 1	
FRACTIONAL	± 1/16			DRN BY DSW DATE 03/27/07 DWG. NO. KDRI31PC4V/DG SCALE TO FIT APPRVL SHT. 1 OF 1	
ANGULAR	± 1/2°				
NO	REVISION	DATE	BY		