


KEYSLOTS FOR  
1/4-20 SCREWS  
2 PLACES

COVER IN  
PLACE

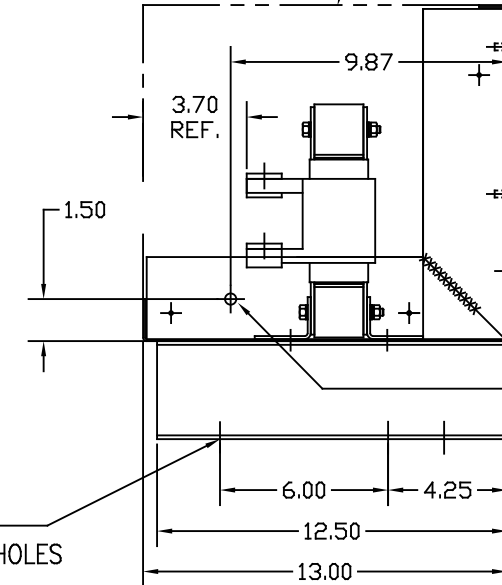

LOCATION FOR  
CUSTOMERS  
CONDUIT FITTING  
(BOTH SIDES)

.44 DIA.  
4 MTG. HOLES

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

VOLTAGE	NEC MOTOR HP	CATALOG NO	MOTOR HP AMPS	AMPS MAX	APPROX WT-LBS	TERMINAL HOLE SIZE
690V	200	KDRI32PC4V	192	200	80	.38

TOLERANCES (EXCEPT AS NOTED)			7878 N. 86th STREET MILWAUKEE, WI 53224  <b>KDR OUTPUT REACTORS 690V (FRAME I) NEMA 1</b>
DECIMAL	XX ± .03		
FRACTIONAL	XXX ± .010		
ANGULAR	± 1/16		
NO	REVISION	DATE	BY

DRN BY DSW DATE 03/27/07 DWG. NO. C KDRI32PC4VDG  
SCALE TO FIT APRVD SHT. 1 OF 1