


NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON COIL FOR REFERENCE ONLY.

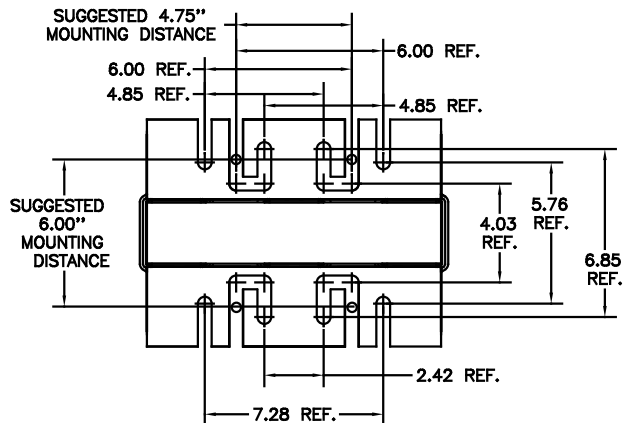

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRL3P	480	450	515	SEE NOTE 1	100	--


NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

TCI Performance and Protection for Drives.

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282

KDR Drive Reactor
CATALOG Motor Amps
3PH, 60Hz, 480V Max, A Max.
40C Amb Max, 195C Rise



				TOLERANCES (UNLESS AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224			
				DECIMAL		KDR DRIVE REACTOR 480V, OUTPUT, "L" FRAME			
				.XX ±.03				DRG. BY RJC DATE 08/03/01 DRG. NO. KDRL3PDG SOLE TO FIT APPROV. C	
				.XXX ±.01					
ADD MARKING NOT				11/27/00	DSW	FRACTIONAL ± 1/32	DRG. NO. KDRL3PDG SHEET 1 OF 1		
2235, MOUNTING CHG				09/15/00	DSW	ANGULAR ± 1/2			
NO	REVISION	DATE	BY						