

| | | | | | | |
|-----------------|--------------------|------------|------------------|-------------|------------------|------------------------|
| VOLTAGE 690V | NEC MOTOR HP | CATALOG NO | MOTOR HP AMPS | AMPS MAX | APPROX WT-LBS | TERMINAL HOLE SIZE. |
| OUTPUT | 75 | KDRF32PV | 77 | 80 | 25 | .375 |

TCI PERFORMANCE AND PROTECTION FOR DRIVES.

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282




KDR Drive Reactor

CATALOG# MOTOR HP AMPS

3PH, 50/60Hz, 690V Max, A Max. RoHS

DATE CODE A1 B1 C1

RU[®] CE

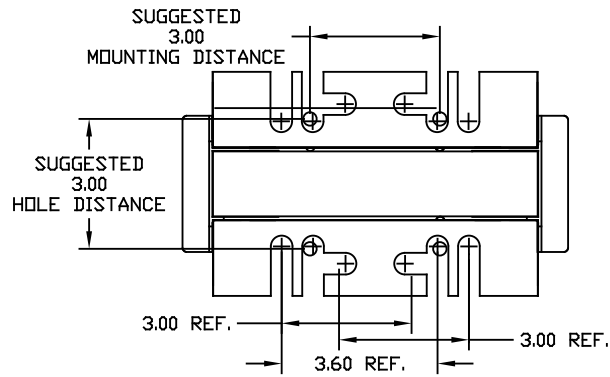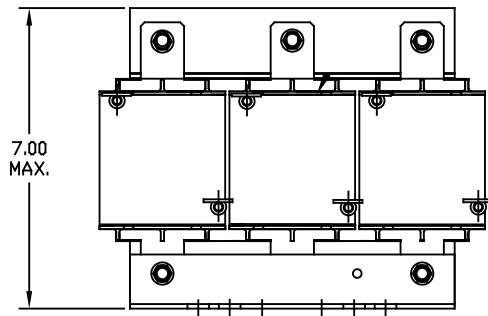

| | | | | | | | | |
|----|----------|------|----|---------------------------------|--|---------|----------|-------------|
| | | | | TOLERANCES (EXCEPT AS NOTED) | 7878 N. 86th STREET MILWAUKEE, WI 53224 KDR OUTPUT REACTOR 690V (FRAME F) | DRN. BY | DATE | DWG. NO. |
| | | | | DECIMAL | | DSW | 03/05/07 | BKDRF32PVDG |
| | | | | .XX ± .03 .XXX ± .01 | | SCALE | APPRVD. | SHT. 1 OF 1 |
| | | | | FRACTIONAL ± 1/32 | | | | |
| | | | | ANGULAR ± 1/2° | | | | |
| NO | REVISION | DATE | BY | | | | | |