

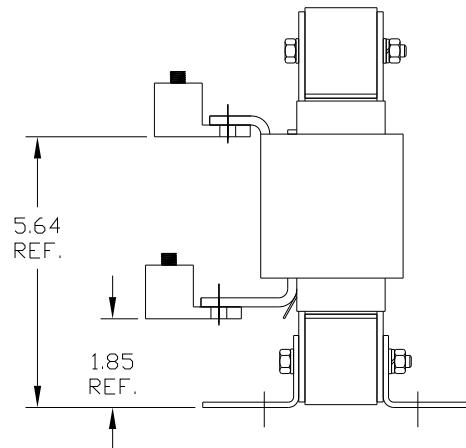


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRULH3L	480	100	124	225	46
KDRULH2L	480	125	156	254	46
KDRULH1L	480	150	180	299	46
KDRULH22L	208/240	60	169	209	51
KDRULH23H	208/240	60	169	220	51
KDRULH44L	575/600	150	144	253	51

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

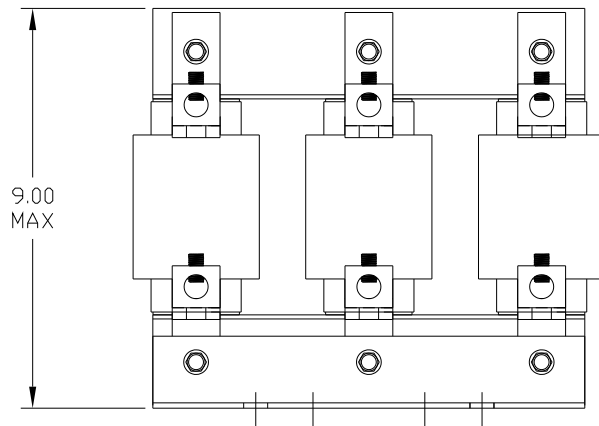

LUG WIRE RANGE 250MCM-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

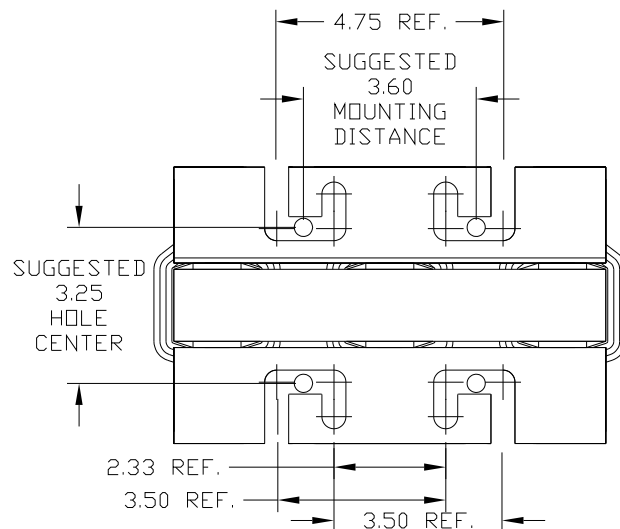

TCI TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282	Performance and Protection for Drives. KDR Drive Reactor CATALOG# <input type="text"/> Motor Amps <input type="text"/> 3PH, 60Hz, 600V Max, <input type="text"/> A Max. 40C Amb Max, 115C Rise Terminal Torque <input type="text"/> LB-IN.		
	A1 A2	B1 B2	

				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ±.03 .XXX ±.010 FRACTIONAL ± 1/16 ANGULAR ± 1/2°		7878 N. 86th STREET MILWAUKEE, WI 53224	
				KDR OPEN (FRAME H) COPPER TERM CONNECTION		DRN BY DSW DATE 04/29/04 DWG NO. KDRULOPEN-120G	
NO	REVISION	DATE	BY	SCALE 1/2"=1"	APPROV	SHT. 1 OF 1	