
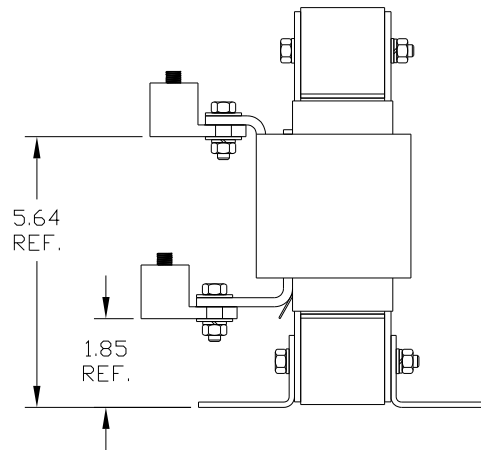


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRUL11P	480	125	156	NOTE:1	56
KDRUL12P	480	150	180	NOTE:1	56
KDRUL131P	575	150	144	NOTE:1	56
KDRUL132P	575	200	192	NOTE:1	51


NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.

KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

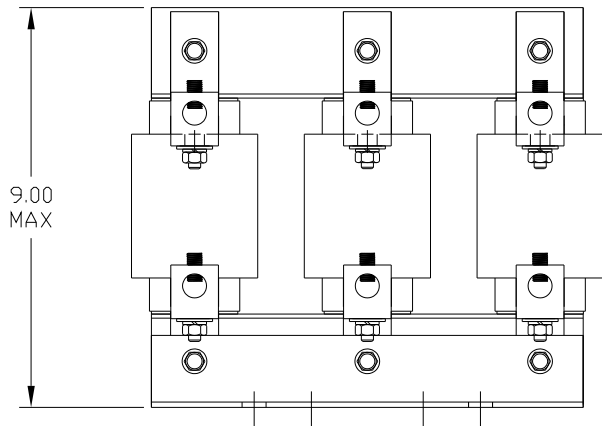

LUG WIRE RANGE 250MCM-6, AL OR CU.  
FOR REACTOR.  
TIGHTENING TORQUE. 275 LB-IN

<b>TCI</b> TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282	<b>Performance and Protection for Drives.</b> KDR Drive Reactor CATALOG# Motor Amps --- 3PH, 60Hz, 600V Max, --- A Max. 40C Amb Max, 155C Rise Terminal Torque --- LB-IN	 

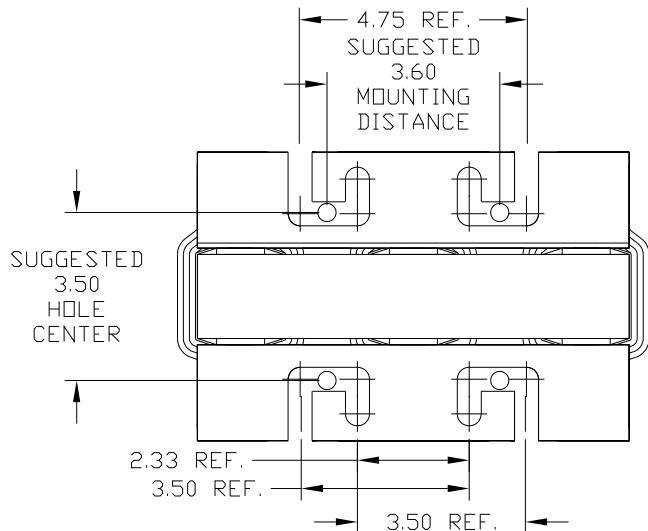

				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ±.03 .XXX ±.01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°		7878 N. 86th STREET MILWAUKEE, WI 53224	
				KDRUL OPEN (FRAME I) KDR DRIVE REACTOR			
NO	REVISION	DATE	BY	DRN BY DSW	DATE 04/30/04	DWG NO. KDRULOPEN-140G	SCALE 1/2"=1"
				APPROV		SHT. 1 OF 1	