





NOTE: INSTALLATION GUIDE MUST BE SHIPPED WITH EACH UNIT.



		PERFORMANCE AND PROTECTION FOR DRIVES.		
Trans-Coil, Inc. Milwaukee, WI www.transcoil.com 800-824-8282		KLCUL Output Filter KLCUL160A3R2 3PH, 60HZ, 480V Max, 160A Max Dwg # 103413DG Schematic # 25389 Enclosure type: 3R		NO. 0001, 01, 010
DATE CODE:				
TCI TRANS-COIL, INC. MILWAUKEE, WISCONSIN 414 257-4400 FAX 414 257-4404		dV/dt GUARD KLC OUTPUT FILTER		

PERFORMANCE AND PROTECTION FOR DRIVES. TRANS-COIL, INC. 1-800-824-8282

LABEL PLACED ON FRONT OF CABINET.

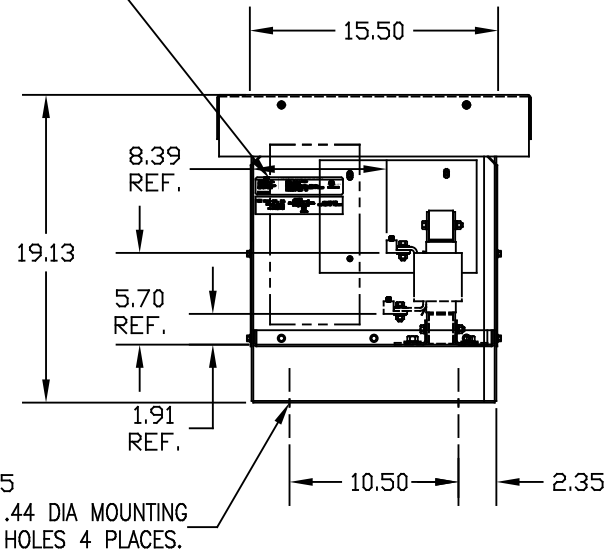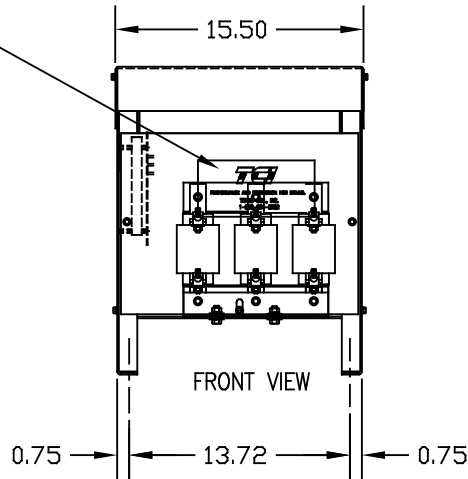

NOTE: CABINET FINISH COLOR, BEIGE.

CATALOG NO.	KLCUL160A3R2
VOLTS	480
AMPS	160
KLR PART NO.	KLR160BCB
KLR BOARD NO.	24492
APPROX. WT.-LBS	85
LUG WIRE RANGE FOR REACTOR.	250MCM-6, AL OR CU.
TIGHTENING TORQUE.	275 LB-IN

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		KLCUL 3R OUTPUT FILTER 480V, 160 AMPS	
				.XX ±.03 .XXX ±.01		DRW BY DSW DATE 3/11/08 DWG NO. 103413DG	
				FRACTIONAL		SCALE TO FIT	
				± 1/32		APPROVAL B	
				ANGULAR		SHT. 1 OF 1	
				± 1/2°			
NO	REVISION	DATE	BY				