



10.00
MAX.
5.76
REF. 4.03
REF.
6.85
REF.

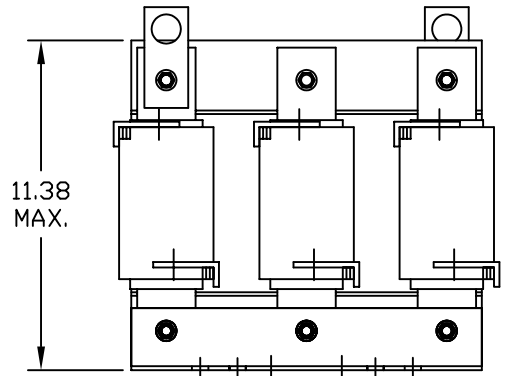



11.38
MAX.

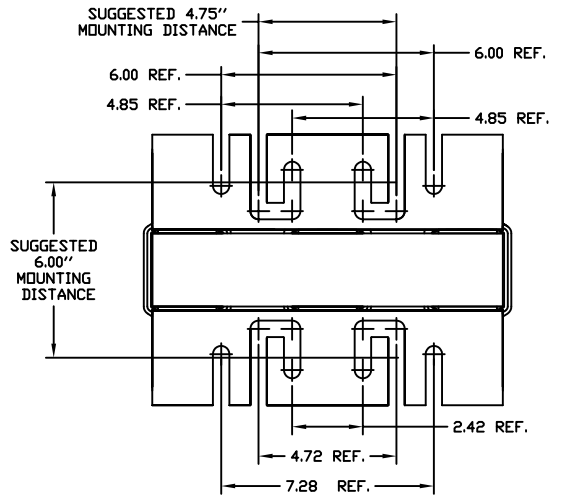

SUGGESTED 4.75"
MOUNTING DISTANCE

SUGGESTED 6.00"
MOUNTING DISTANCE

690V	NEC MOTOR HP	CATALOG NO	__AMPS(A)	APPROX WT-LBS	WATTS LOSS	TERMINAL HOLE SIZE
5% Z	250	KLR250ECBV	250	115	375	.44 DIA

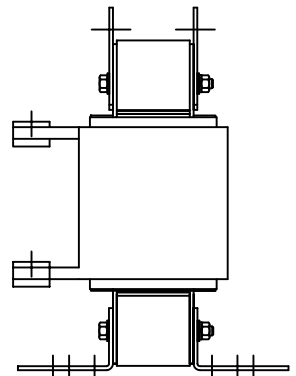

						7878 N. 86th STREET MILWAUKEE, WI 53224 KLR SERIES 3 PH REACTORS 690V (FRAME L)			
							DRN BY DSW	DATE 03/5/07	DWG. NO. B
							SCALE TO FIT	APPRVD.	KLR250ECBV
									SHT.1 OF1
NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)					
				DECIMAL					
				.XX ± .03					
				.XXX ± .01					
				FRACTIONAL					
				± 1/32					
				ANGULAR					
				± 1/2°					