


GENERAL PURPOSE, 1/3R, COLOR: WHITE.

290 LBS : APPROX WEIGHT.

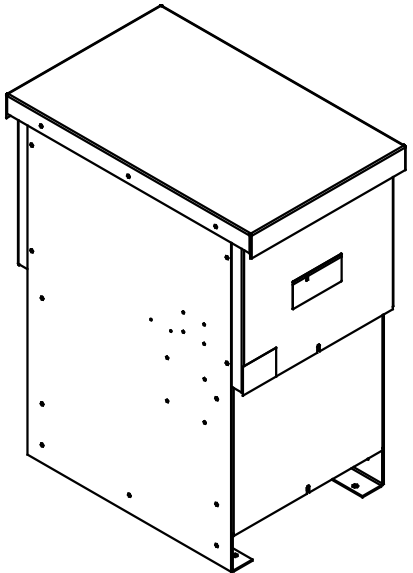


KMG HIGH PERFORMANCE OUTPUT FILTER
 PART NUMBER: KMG160CG3R0000
 FLA: 160 DRAWING#: 103927DG
 SYSTEM VOLTAGE: 600V SCHEMATIC: 26941
 HZ: 60
 PHASE: 3 ENCLOSURE TYPE: 1/3R
MOTORGUARD

PART NUMBER: KMG160CG3R0000
 FOR SCHEMATIC SEE DRAWING# 26941.


TCI
MOTORGUARD

GROUND LUG
 WIRE RANGE: 250MCM-#6 AWG
 TORQUE: 275 LB-IN

CUSTOMER CONNECTIONS





CUSTOMER WIRE ENTRANCE
 AND EXIT LOCATION.

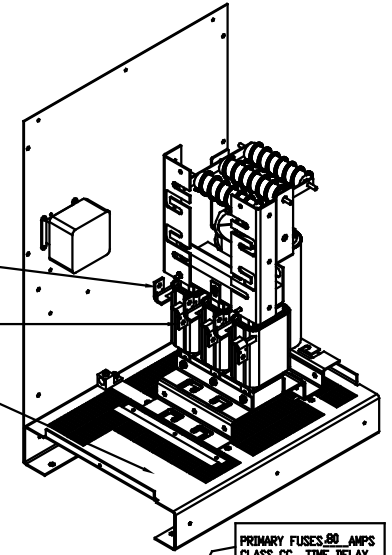

DANGER
 HIGH VOLTAGE

PRIMARY FUSES: 80 AMPS
 CLASS CC TIME DELAY

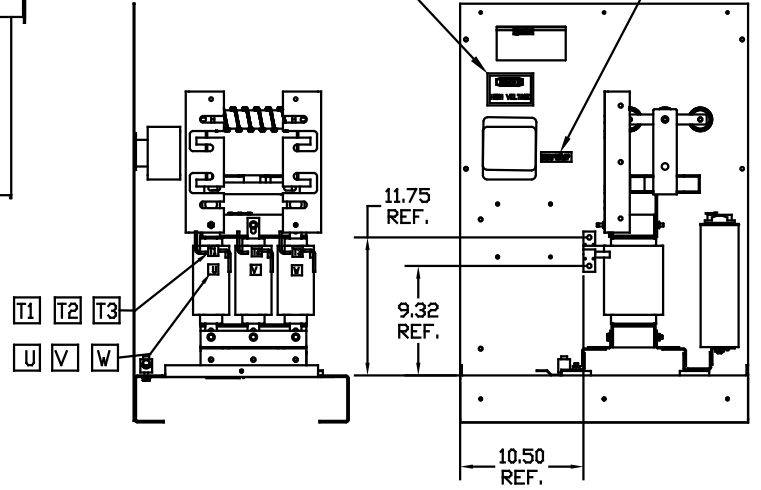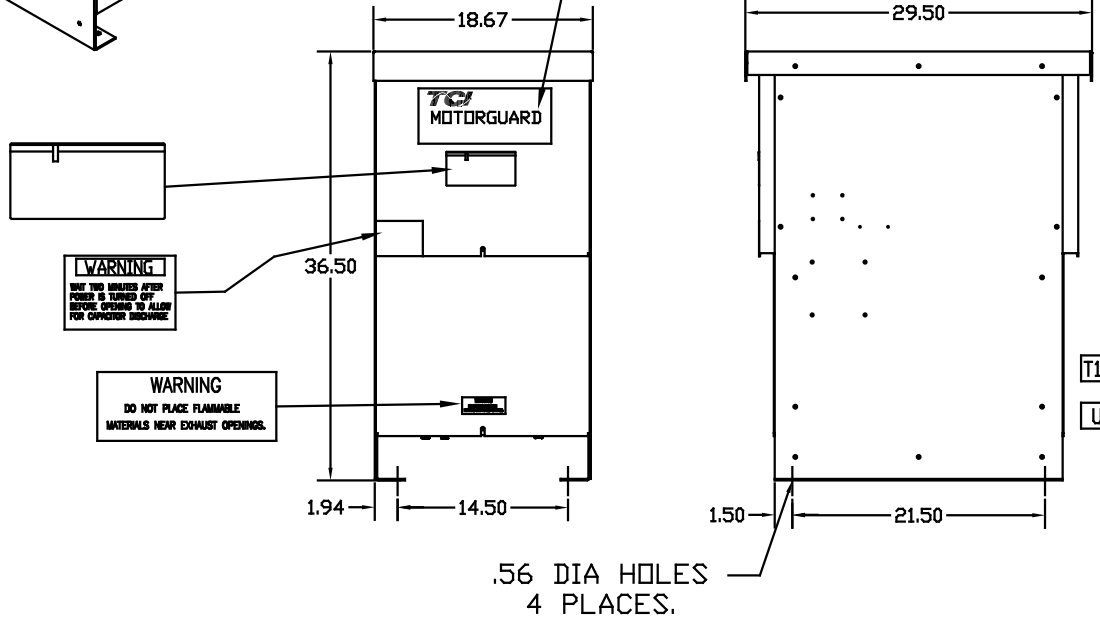

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

| | | | | | |
|----|----------|------|----|--------------------------------|--|
| | | | | TOLERANCES EXCEPT AS NOTED: | TCI 7878 N. 86th STREET MILWAUKEE, WI 53224 |
| | | | | DECIMAL | |
| | | | | .XX ± .03 | KMG, LRC FILTER STANDARD 160 AMP 600/3/80, 1/3R |
| | | | | .XXX ± .01 | |
| | | | | FRACTIONAL ± 1/32 | |
| | | | | ANGULAR ± 1/2° | |
| NO | REVISION | DATE | BY | SCALE TO FIT | DESIGNED BY: DSW DATE: 1/28/09 DRAWING NO: 103927DG SHEET: 1 of 1 |