


GENERAL PURPOSE, 1/3R, COLOR: GREY.

209 LBS : APPROX WEIGHT.

GROUND LUG
WIRE RANGE: 1/0-14 AWG
TORQUE: 200 LB-IN

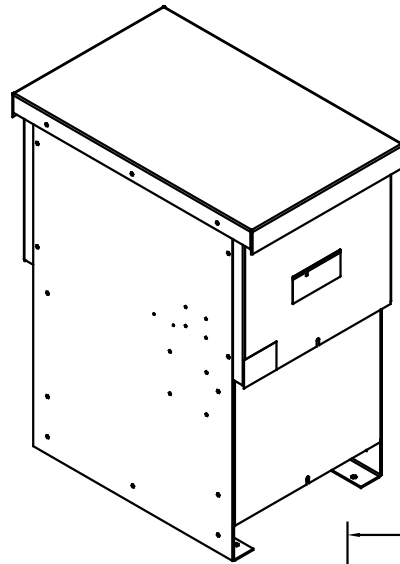



KMG HIGH PERFORMANCE OUTPUT FILTER

PART NUMBER: KMG55AG010000



FLA: 55 DRAWING#: 103882DG
SYSTEM VOLTAGE: 480V SCHEMATIC: 26886
HZ: 60 ENCLOSURE TYPE: 1/3R
PHASE: 3

MOTORGUARD


CUSTOMER CONNECTIONS

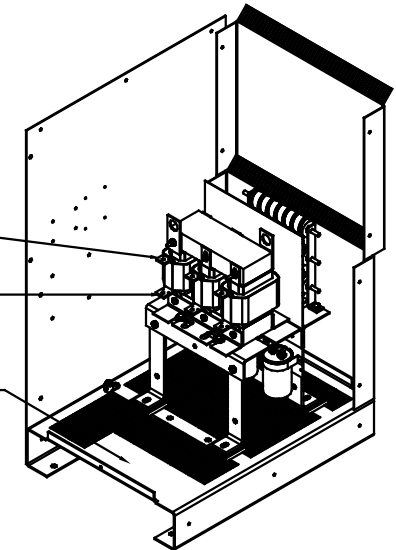

CUSTOMER WIRE ENTRANCE AND EXIT LOCATION.

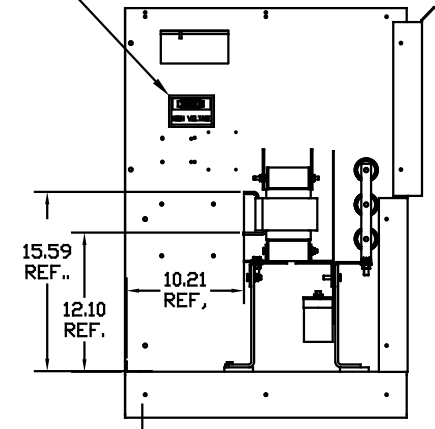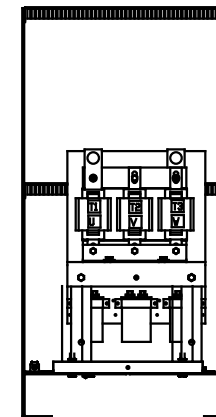

TCU
MOTORGUARD

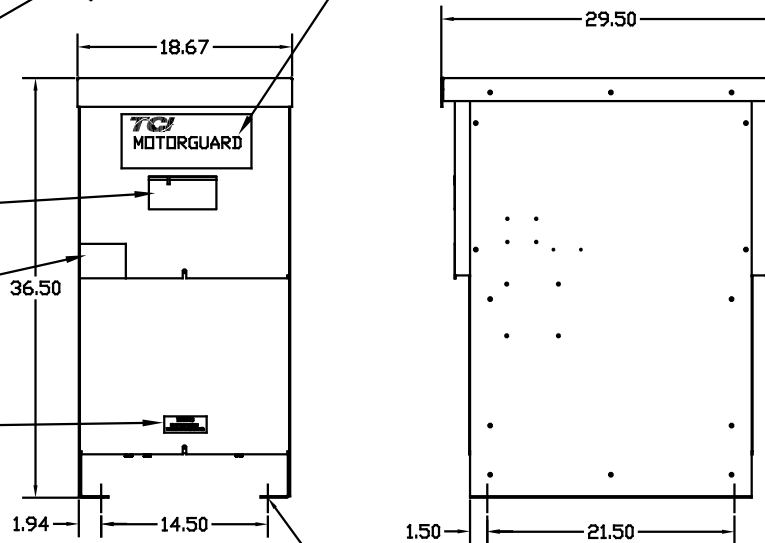

WARNING
WAIT TWO MINUTES AFTER POWER IS TURNED OFF BEFORE OPENING TO ALLOW FOR CAPACITOR DISCHARGE.

WARNING
DO NOT PLACE FLAMMABLE MATERIALS NEAR EXHAUST OPENINGS.

.56 DIA HOLES
4 PLACES.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

PART NUMBER: KMG55AG010000

FOR SCHEMATIC SEE DRAWING # 26886.

				TOLERANCES EXCEPT AS NOTED: DECIMAL	TCU 7878 N. 86th STREET MILWAUKEE, WI 53224
				.XX ± .03 .XXX ± .01	
				FRACTIONAL ± 1/32	KMG, LRC FILTER STANDARD 55 AMP 480/3/80, 1/3R
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY	SCALE TO FIT	DESIGNED BY: DSW DATE: 11/25/08 DWG. NO.: 103882DG APPROVED BY: [Signature] SHT. 1 OF 1