
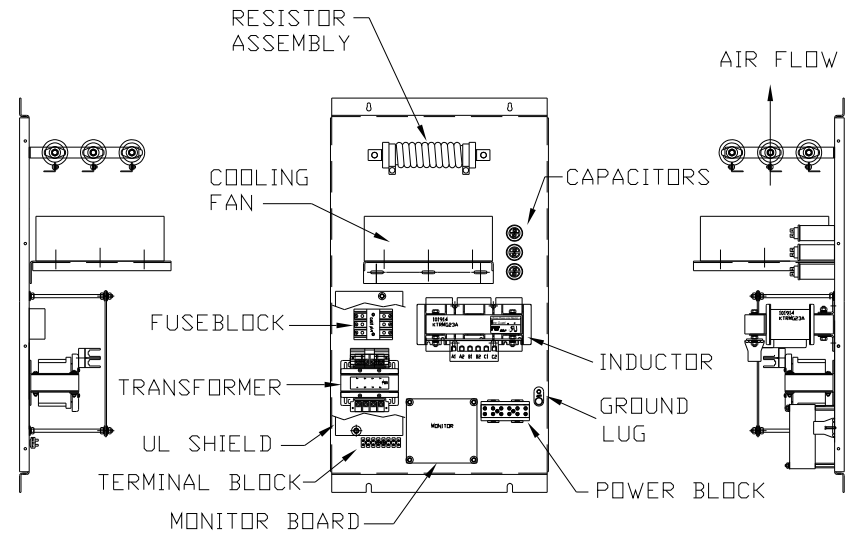


REMOVABLE DOOR,  
SIDE PLATES,  
VENTED TOP AND  
UNVENTED BOTTOM PANEL

GROUND LUG  
WIRE RANGE: 1/0-14 AWG  
TORQUE: 200 LB-IN

LINE CONNECTIONS  
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.  
6 AWG THRU 14 AWG 30 IN-LB MAX.  
16 AWG THRU 22 AWG 25 IN-LB MAX.

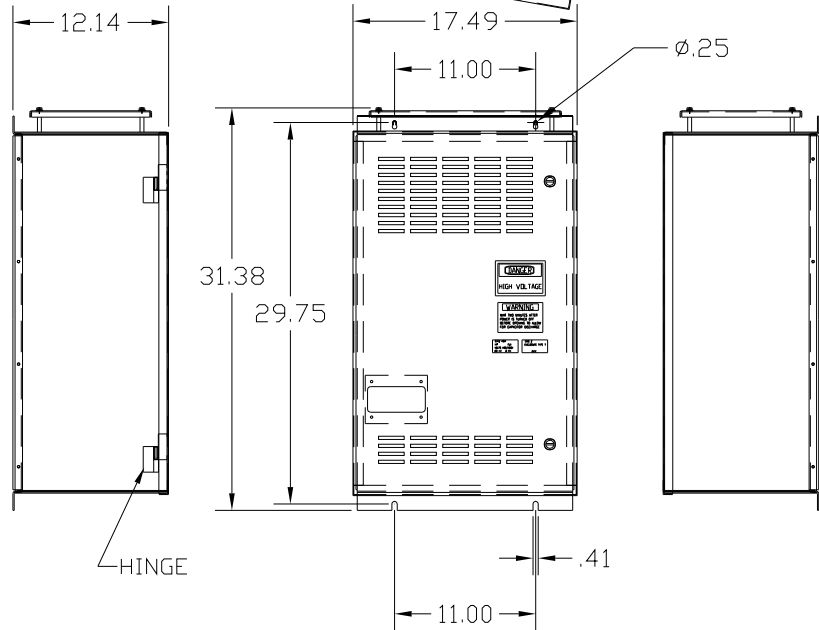


FOR SCHEMATIC SEE DRAWING P/N 24281-2

CUSTOMER IS RESPONSIBLE FOR PROPER  
INSTALLATION OF ASSEMBLY IN ACCORDANCE  
WITH LOCAL AND NATIONAL CODES.

CAT# KMG23AE01

CAT# KMG23AE01  
HP 15 FLA 23  
VOLTS 460/480V  
60 HZ 3 PH

DWG # 101960DG  
ENCLOSURE TYPE 1  
DATE

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .01 .XXX ± .005	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN BY RJC DATE 1/6/03 DWG. NO. 101960DG
NO	REVISION	DATE	BY	SCALE --	APRVD. B SHT. 1 of 1

SINEWAVE FILTER-ENCLOSED  
15 HP, 23 AMP, 480 V.