
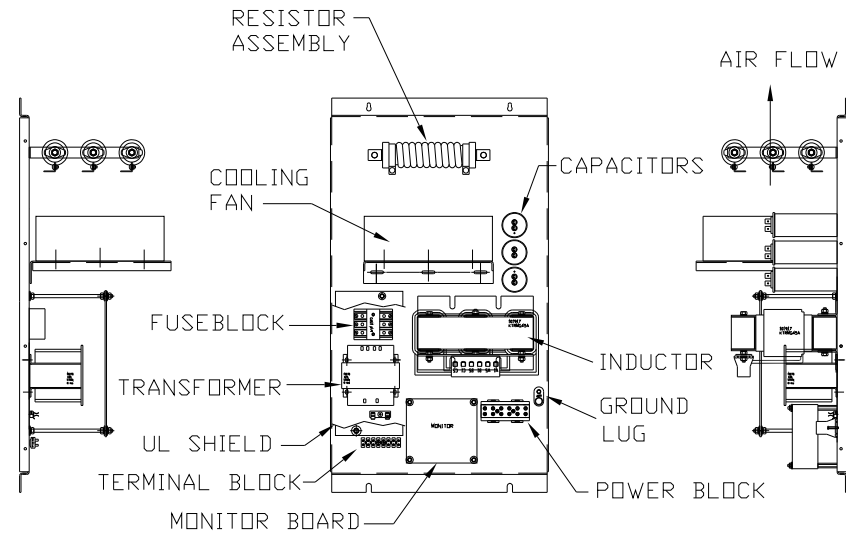


GROUND LUG
WIRE RANGE: 1/0-14 AWG
TORQUE: 200 LB-IN

LINE CONNECTIONS
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.
6 AWG THRU 14 AWG 30 IN-LB MAX.
16 AWG THRU 22 AWG 25 IN-LB MAX.

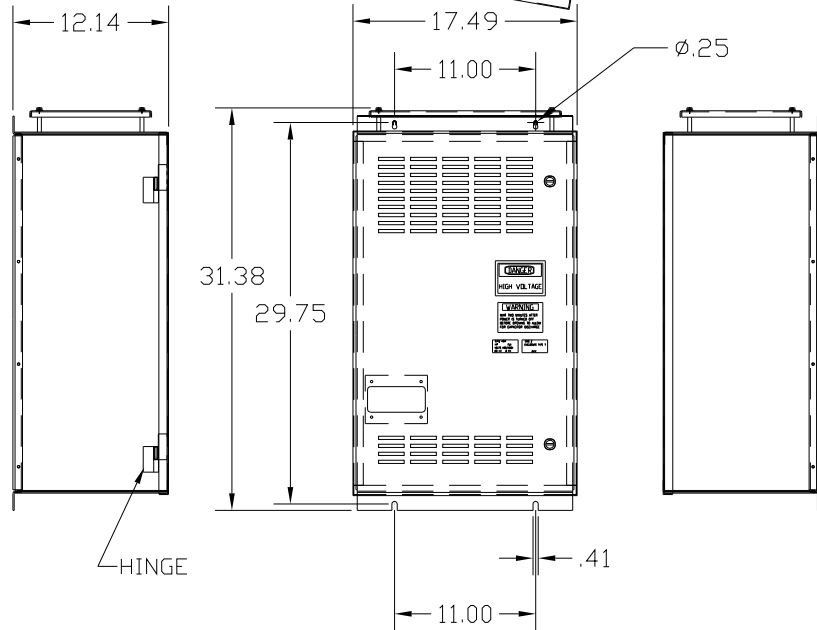

FOR SCHEMATIC SEE DRAWING P/N 24281-12

CAT# KMG35CE01
HP 30 FLA 35
VOLTS 575/600 V
60 HZ 3 PH

DWG # 102007DG
ENCLOSURE TYPE 1
DATE

CUSTOMER IS RESPONSIBLE FOR PROPER
INSTALLATION OF ASSEMBLY IN ACCORDANCE
WITH LOCAL AND NATIONAL CODES.

CAT# KMG35CE01

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .01		SINEWAVE FILTER-ENCLOSED 30 HP, 35 AMP, 600 V.	
				.XXX ± .005			
				FRACTIONAL		DRN BY RJC DATE 1/26/03 DWG. NO. 102007DG	
				± 1/32		SCALE -- APRVD. B	
				ANGULAR		SHT. 1 of 1	
NO	REVISION	DATE	BY	± 1/2°			