
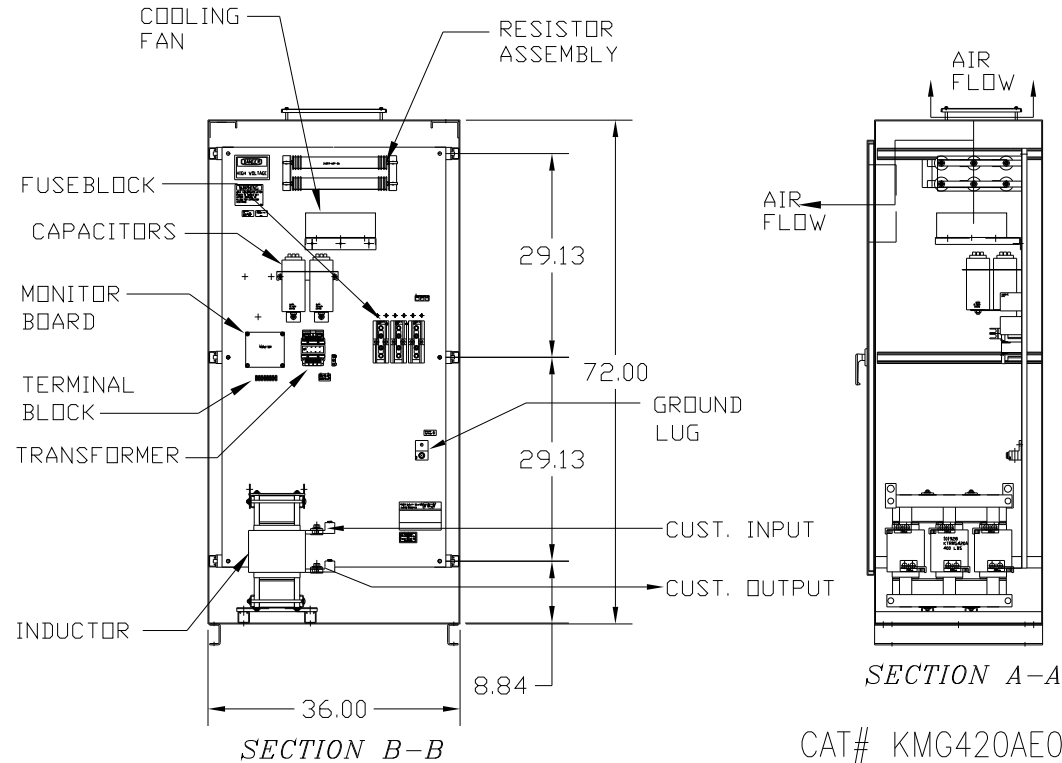


CAT# KMG420AE01
 350 FLA 420
 VOLTS 460/480V
 60 HZ 3 PH


DWG # 101974DG
 ENCLOSURE TYPE 1
 DATE

FOR SCHEMATIC SEE DRAWING P/N 24281-5
 CUSTOMER IS RESPONSIBLE FOR PROPER
 INSTALLATION OF ASSEMBLY IN ACCORDANCE
 WITH LOCAL AND NATIONAL CODES.

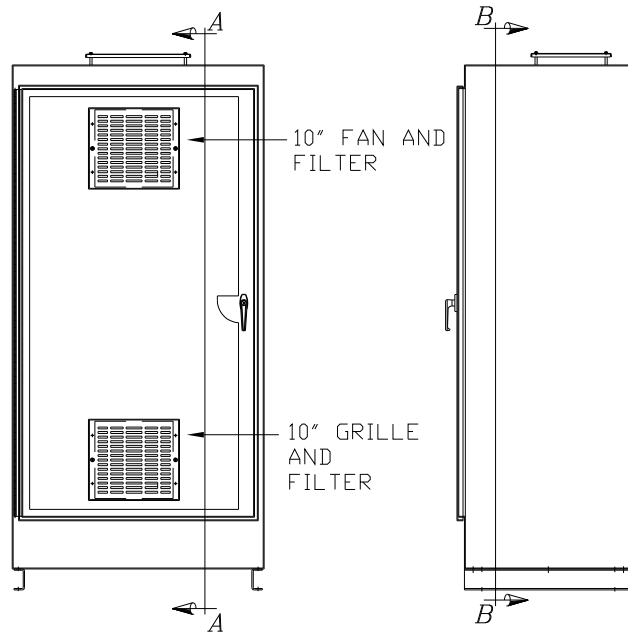

GROUND LUG
 WIRE RANGE: (2)600MCM-2
 TORQUE: 500 LB-IN

 LINE CONNECTIONS
 WIRE RANGE: (2)600MCM-2
 TORQUE: 500 LB-IN

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .01 .XXX ± .005	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	SINEWAVE FILTER-ENCLOSED 350 HP, 420 AMP, 480 V.
NO	REVISION	DATE	BY		DRN BY RJC DATE 1/6/03 DWG. NO. 101974DG SCALE -- APRVD. B SHT. 1 of 1