
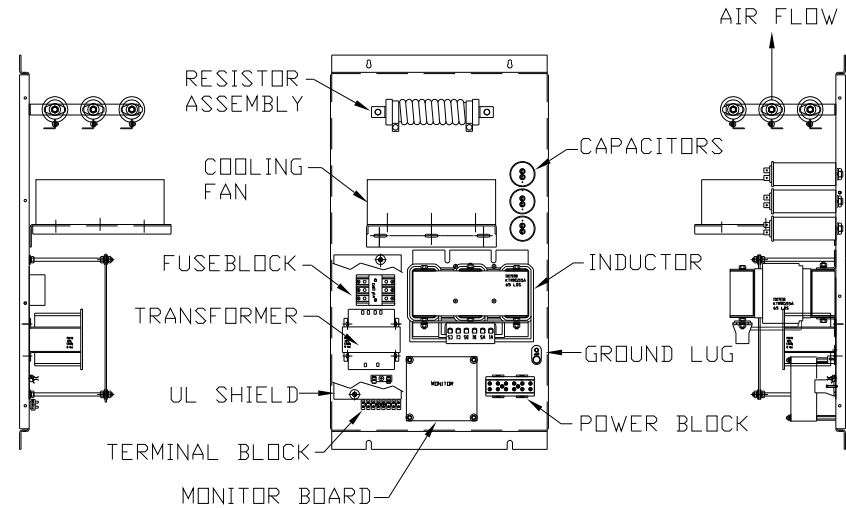


REMOVABLE DOOR,
SIDE PLATES,
VENTED TOP AND
UNVENTED BOTTOM PANEL

GROUND LUG
WIRE RANGE: 1/0-14 AWG
TORQUE: 200 LB-IN

LINE CONNECTIONS
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.
6 AWG THRU 14 AWG 30 IN-LB MAX.
16 AWG THRU 22 AWG 25 IN-LB MAX.

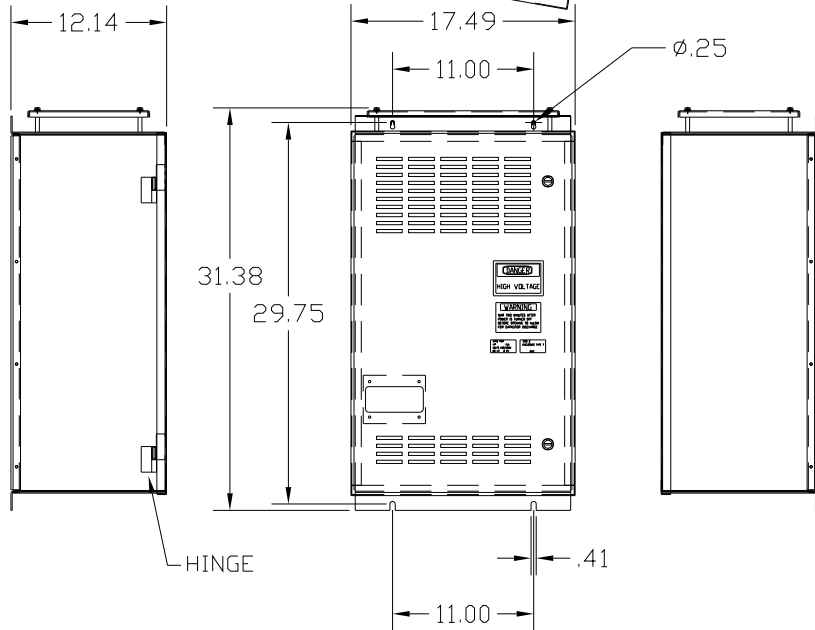


FOR SCHEMATIC SEE DRAWING P/N 24281-12

CAT# KMG45CE01
HP 40 FLA 45
VOLTS 575/600 V
60 HZ 3 PH

DWG # 102008DG
ENCLOSURE TYPE 1
DATE

CUSTOMER IS RESPONSIBLE FOR PROPER
INSTALLATION OF ASSEMBLY IN ACCORDANCE
WITH LOCAL AND NATIONAL CODES.

CAT# KMG45CE01

				TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224		
				DECIMAL				
				.XX ± .01		SINEWAVE FILTER-ENCLOSED 40 HP, 45 AMP, 600 V.		
				.XXX ± .005				
				FRACTIONAL ± 1/32				
				ANGULAR ± 1/2°		DRN BY RJC	DATE 1/26/03	DWG NO. 102008DG
NO	REVISION	DATE	BY			SCALE --	APRVD.	B SHT. 1 of 1