
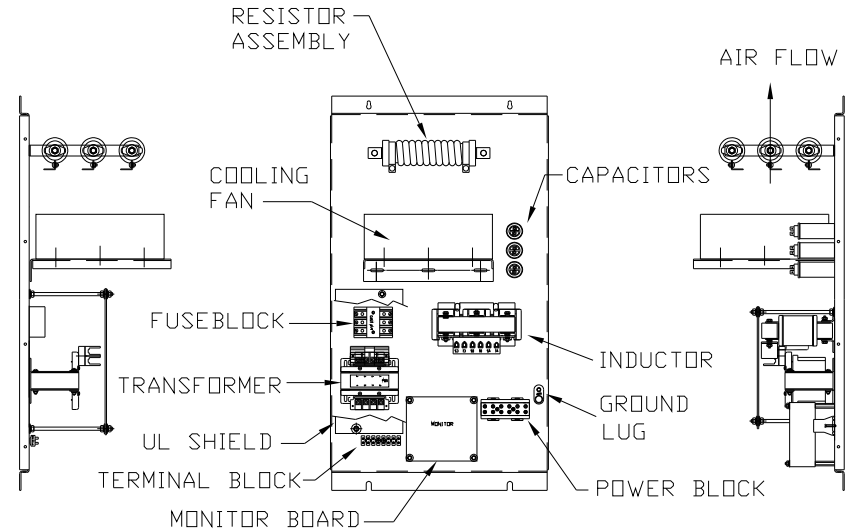


REMOVABLE DOOR,
SIDE PLATES,
VENTED TOP AND
UNVENTED BOTTOM PANEL

GROUND LUG
WIRE RANGE: 1/0-14 AWG
TORQUE: 200 LB-IN

LINE CONNECTIONS
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.
6 AWG THRU 14 AWG 30 IN-LB MAX.
16 AWG THRU 22 AWG 25 IN-LB MAX.

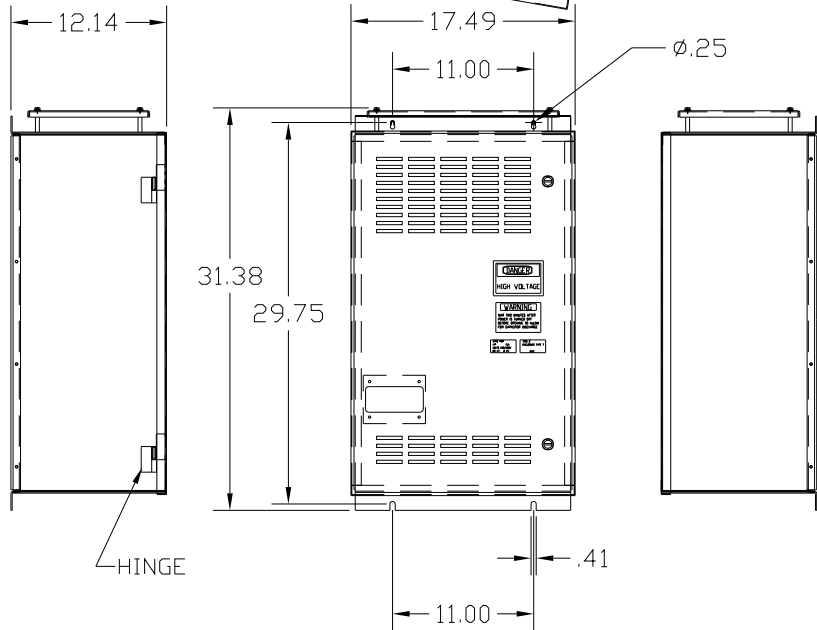

FOR SCHEMATIC SEE DRAWING P/N 24281-1

CUSTOMER IS RESPONSIBLE FOR PROPER
INSTALLATION OF ASSEMBLY IN ACCORDANCE
WITH LOCAL AND NATIONAL CODES.

CAT# KMG8AE01
HP 5 FLA 8
VOLTS 460/480V
60 HZ 3 PH

DWG # 101957DG
ENCLOSURE TYPE 1
DATE

CAT# KMG8AE01

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .01		SINEWAVE FILTER-ENCLOSED 5 HP, 8 AMP, 480 V.	
				.XXX ± .005			
				FRACTIONAL ± 1/32		DRN BY RJC	
				ANGULAR ± 1/2°		DATE 1/6/03	
NO	REVISION	DATE	BY	SCALE --		APRVD.	DWG. NO. B 101957DG
							SHT. 1 OF 1