
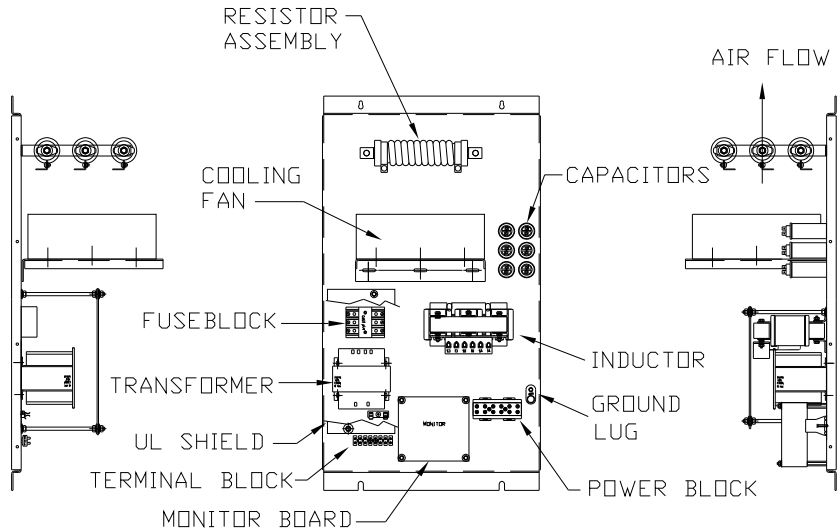


GROUND LUG  
WIRE RANGE: 1/0-14 AWG  
TORQUE: 200 LB-IN

LINE CONNECTIONS  
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.  
6 AWG THRU 14 AWG 30 IN-LB MAX.  
16 AWG THRU 22 AWG 25 IN-LB MAX.

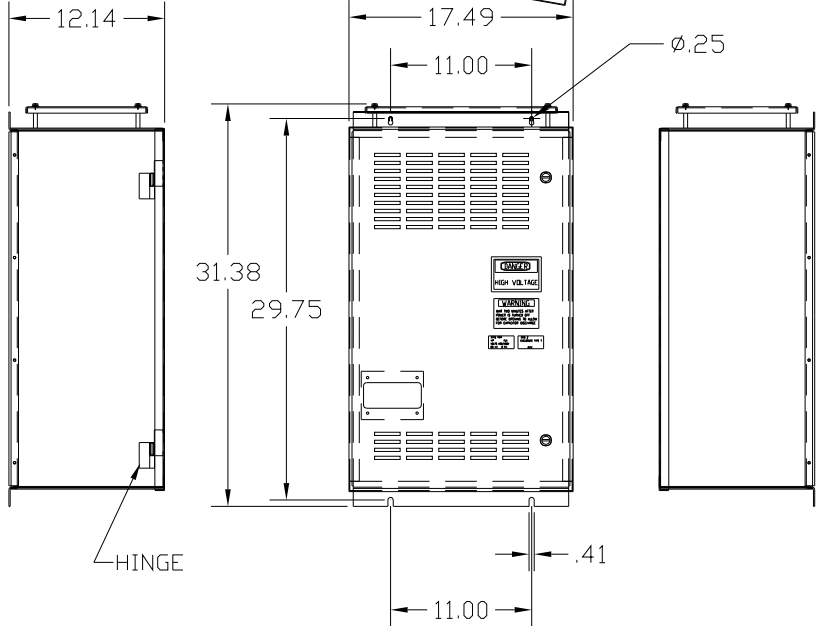

FOR SCHEMATIC SEE DRAWING P/N 24281-11

CAT# KMG8CE01  
HP 5 FLA 8  
VOLTS 575/600V  
60 HZ 3 PH

DWG # 102001DG  
ENCLOSURE TYPE 1  
DATE

CUSTOMER IS RESPONSIBLE FOR PROPER  
INSTALLATION OF ASSEMBLY IN ACCORDANCE  
WITH LOCAL AND NATIONAL CODES.

CAT# KMG8CE01

				TOLERANCES (EXCEPT AS NOTED)		<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224		
				DECIMAL				
				.XX ±.01		SINEWAVE FILTER-ENCLOSED 5 HP, 8 AMP, 600 V.		
				.XXX±.005				
				FRACTIONAL ± 1/32				
				ANGULAR ± 1/2°		DRN BY RJC	DATE 1/27/03	DWG. NO. 102001DG
NO	REVISION	DATE	BY			SCALE --	APRVD.	B
								SHT. 1 OF 1