TORQUE WIRE LUG TO 50 IN-LBS

WEIGHT: 13 LBS
POWER DISSIPATION @ RATED CURRENT: 11W MAX
AGENCIES: UL RECOGNIZED UNDER UL 1283

MAX LEAKAGE CURRENT EACH LINE TO GROUND
15X6mA AT 250VAC 60Hz
35X6mA AT 600VAC 60Hz

HI-POT(1 MIN)	HI-POT(3150 VDC,1 MIN)
L/G 3150VDC	A-B, A-C, A-N, A-G B-C, B-N, B-G
L/L 3150VDC	C-N, C-G, N-G (10 TESTS)

RATED VOLTAGE: 600VAC MAX, 50-60Hz
RATED CURRENT AT: 250VAC, 60A - 600VAC, 60A
MAX OPERATING AMBIENT TEMPERATURE AT RATED CURRENT: 40°C
HUMIDITY RANGE: 0-95% R.H.
INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 250VDC

50 Ω INSERTION LOSS

COMMON MODE		DIFFERENTIAL MODE	
mHz	min. I.L. (dB)	mHz	min. I.L. (dB)
.01		.01	
.05		.05	
.15	60	.15	15
0.5	60	0.5	25
1.0	60	1.0	25
5.0	60	5.0	40
10	50	10	40
30	40	30	30
100		100	

ELECTRICAL SCHEMATIC

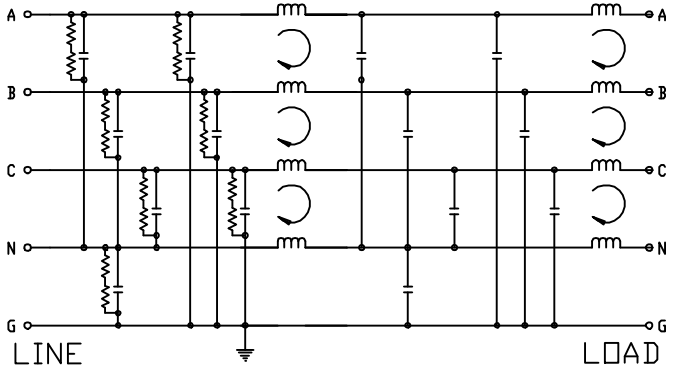

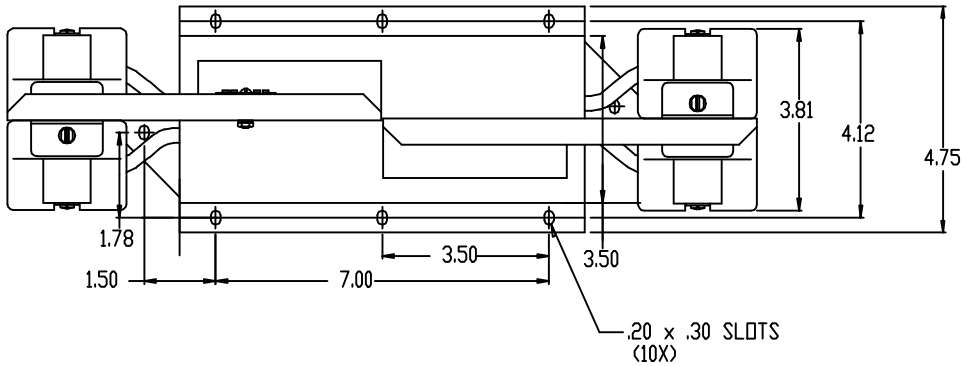

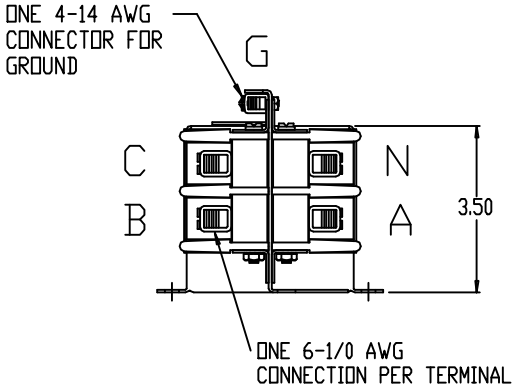

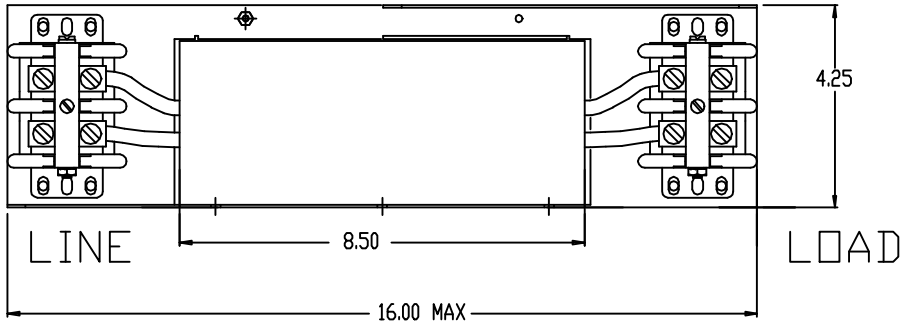

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL .XX ±.03 .XXX±.010
FRACTIONAL ± 1/16
ANGULAR ± 1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

FILTER SPECIFICATION
KRF60CPT

DRN. BY BW | DATE 08-7-00 | DWG NO. C 101368DG
SCALE 1/2"=1" | APRVD. | SHT. 1 OF 1