

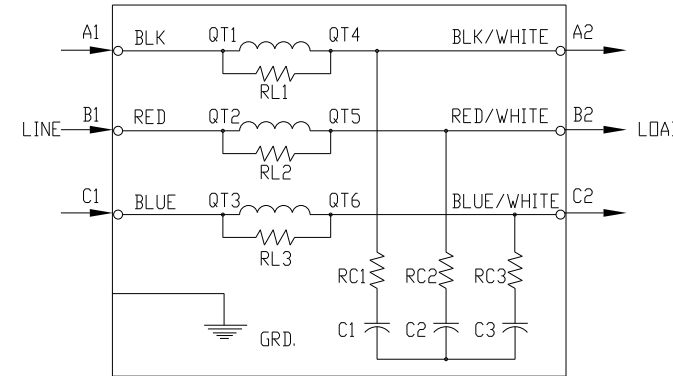


SECTION A-A




SPECIFICATIONS:	
AMP.	160
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	99
ENCLOSURE	ENCLOSED, 3R
ENCL., COLOR	PEBBLE GRAY

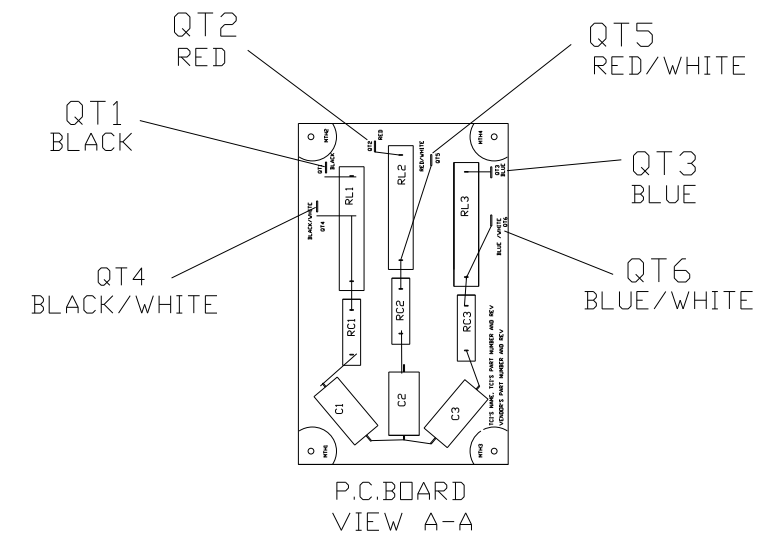



P.C. BOARD VIEW A-A


FINISH:
 VENDOR - LILLY POWDER COATINGS, INC.
 PRODUCT CODE - 312E
 COLOR - PEBBLE GRAY
 POWDER TYPE - POLYESTER-POLYURETHANE
 PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
 AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

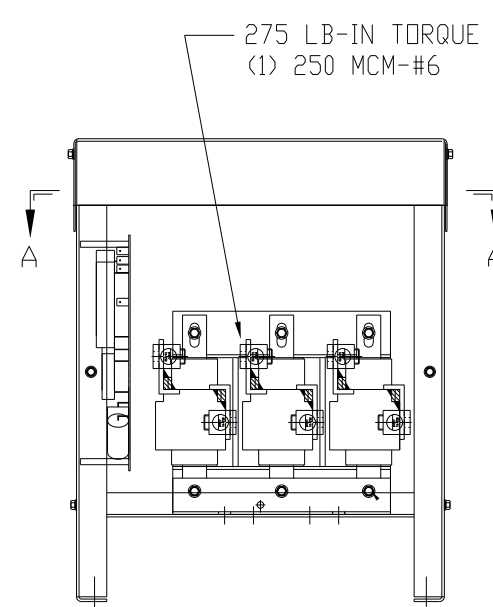

.44 DIA HOLES 4 PLACES.

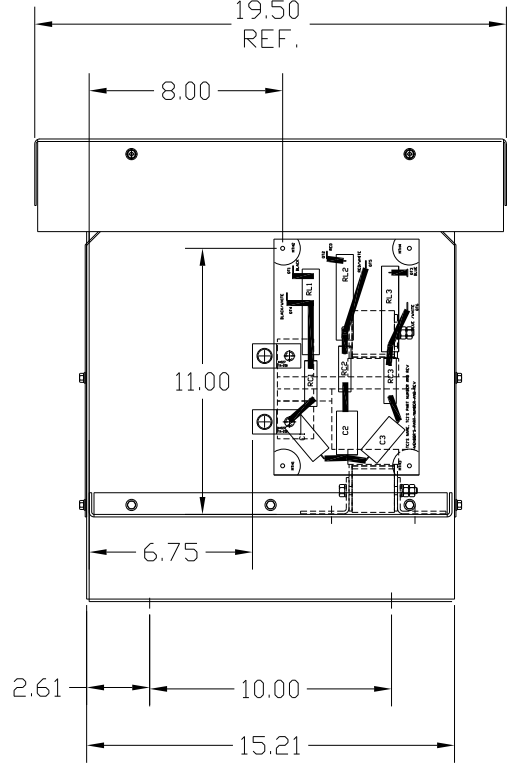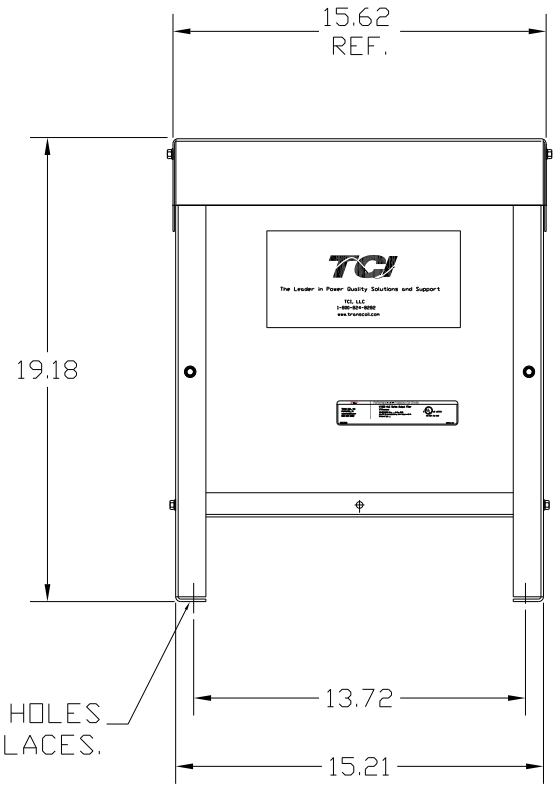

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224 V1K160A03EX OUTPUT FILTER 160 AMP, 480/3/60, ENCL.,3R
				DECIMAL	
				.XX ± .02	
				.XXX ± .01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY RJC DATE 6/18/10 DWG. NO. 104258DG SCALE -- APRVD. B
NO	REVISION	DATE	BY		SHT. 1 OF 1