

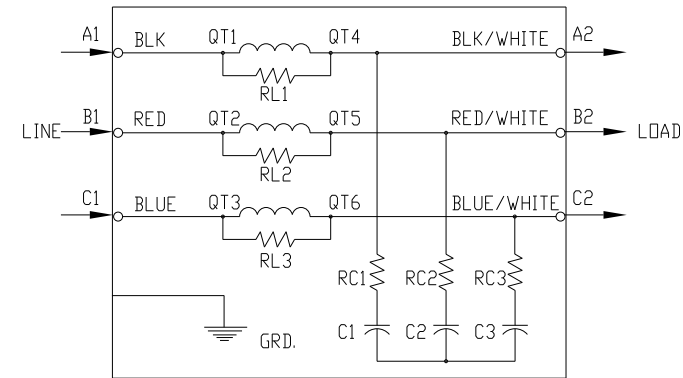


SECTION A-A






SPECIFICATIONS:	
AMP.	200
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	99
ENCLOSURE	ENCLOSED, 3R
ENCL., COLOR	PEBBLE GRAY

120 LB-IN TORQUE  
(2) 2/0-#14 AL. OR CU.

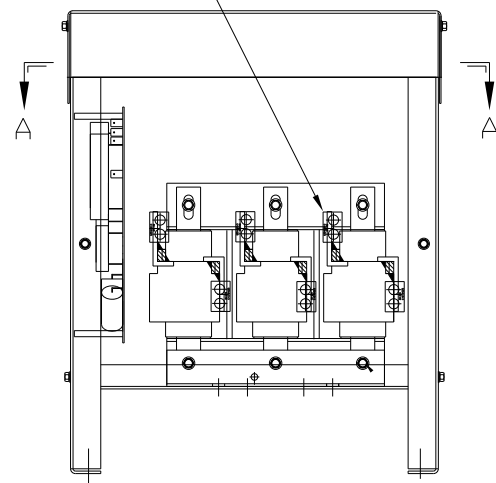


.44 DIA HOLES  
4 PLACES.

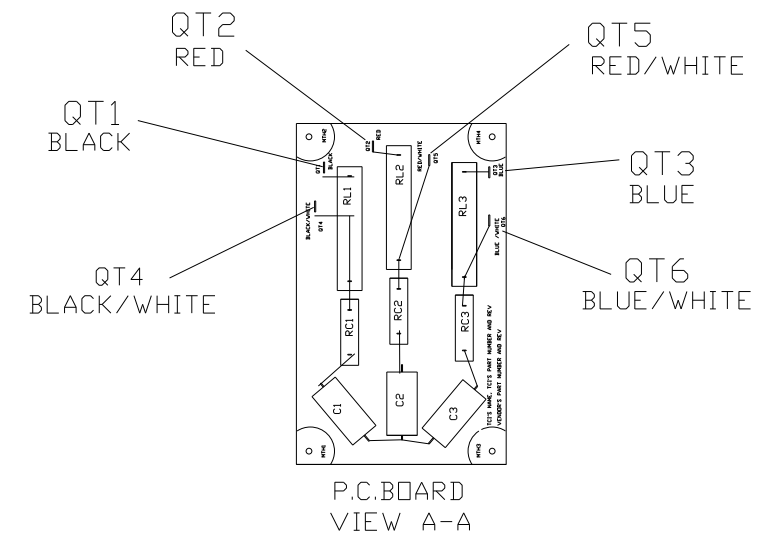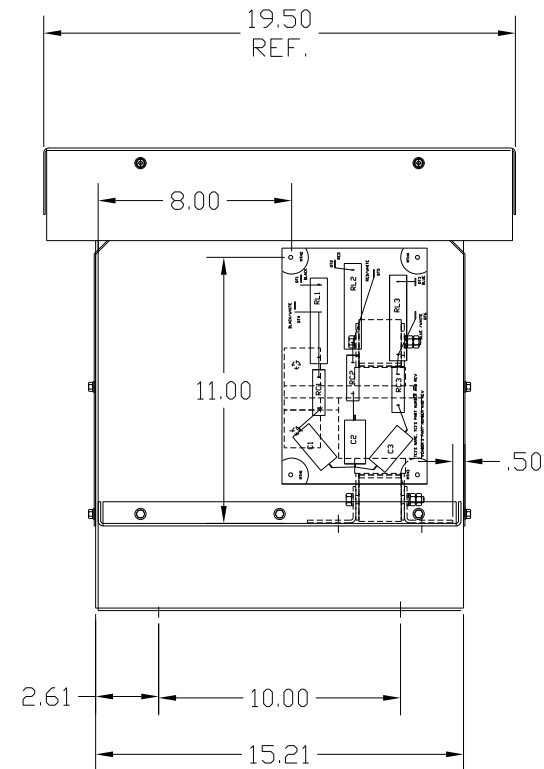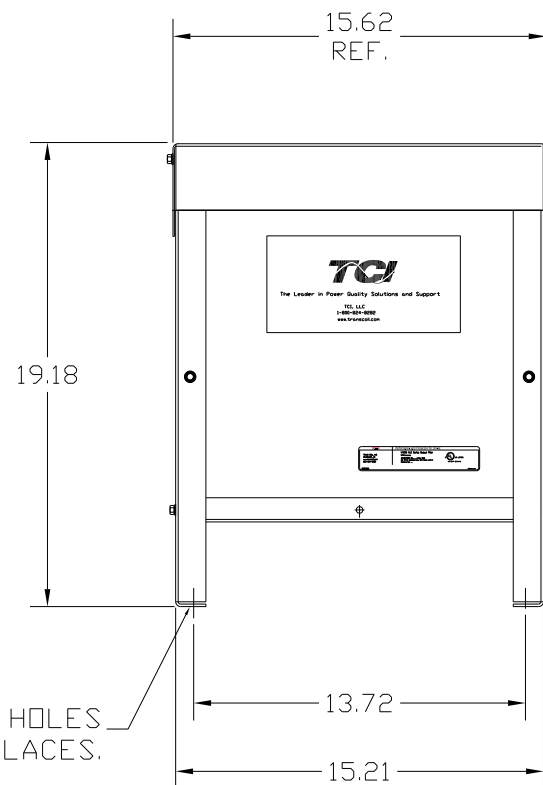

FINISH:  
 VENDOR - LILLY POWDER COATINGS, INC.  
 PRODUCT CODE - 312E  
 COLOR - PEBBLE GRAY  
 POWDER TYPE - POLYESTER-POLYURETHANE  
 PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
 AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO  
 MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED) DECIMAL	 7878 N. 86th STREET MILWAUKEE, WI 53224  <b>V1K200A03EX OUTPUT FILTER</b> <b>200 AMP, 480/3/60, ENCL.,3R</b>
				.XX ± .02	
				.XXX ± .01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY <b>RJC</b> DATE <b>6/18/10</b> DWG. NO. <b>104259DG</b> SCALE --      APRVD. <b>B</b>
NO	REVISION	DATE	BY		SHT. 1 OF 1