





SECTION A-A

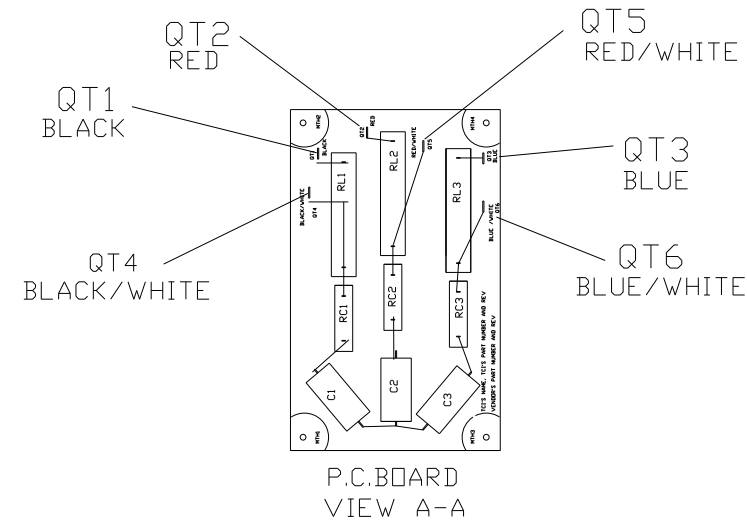

TERMINAL BLOCK SPECIFICATIONS:
 600 V., 85 AMP.
 18-4 AWG
 TORQUE 20 IN-LBS

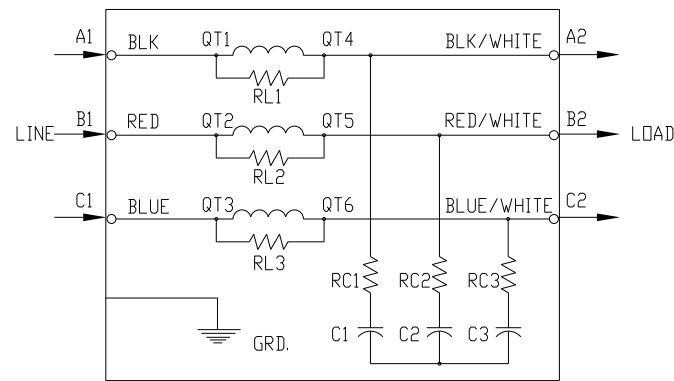


SPECIFICATIONS:	
AMP.	27
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	29
ENCLOSURE	ENCLOSED, 3R
ENCL., COLOR	PEBBLE GRAY

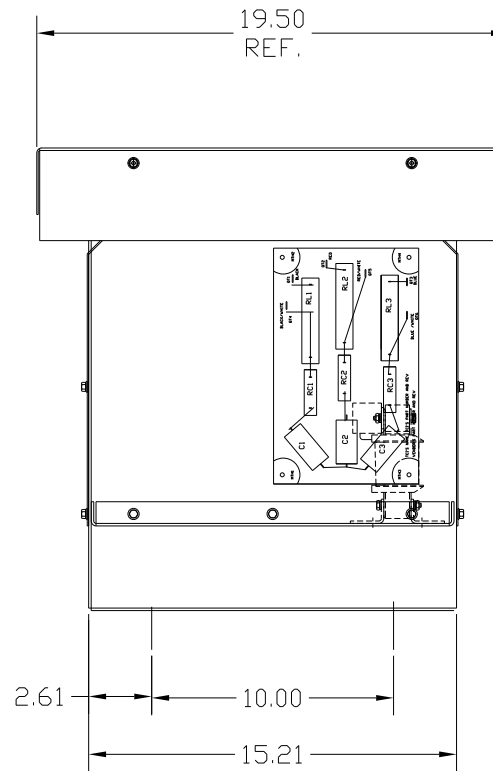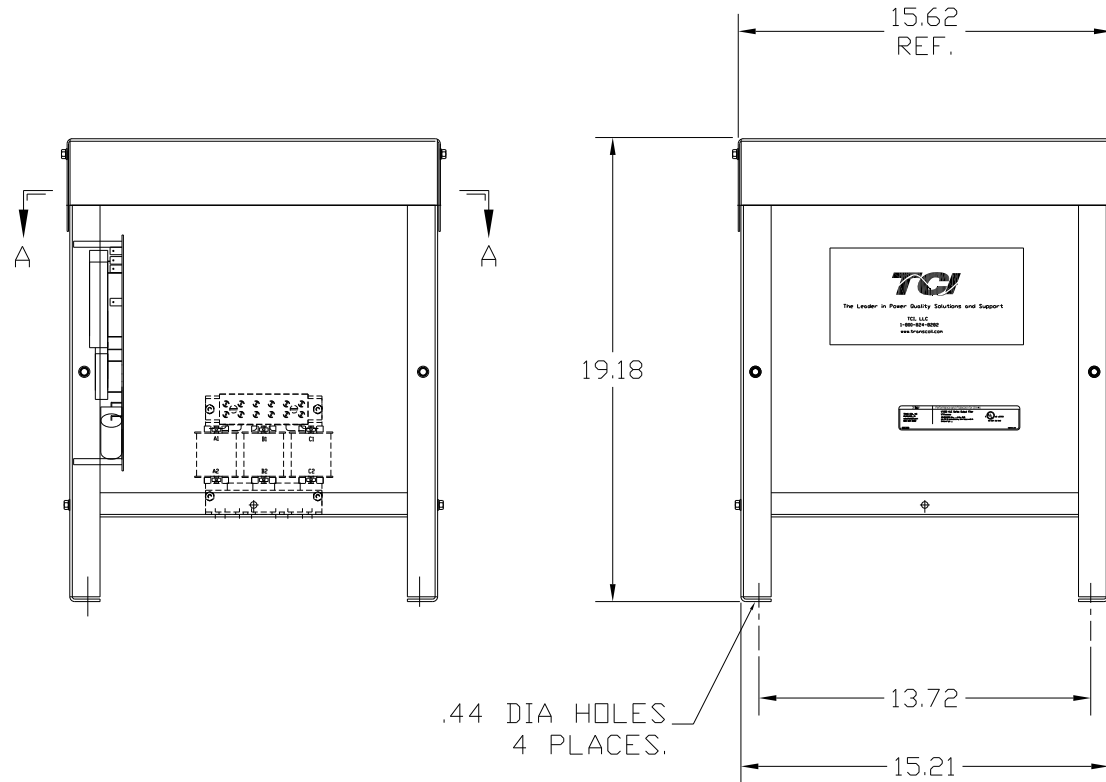

FINISH:
 VENDOR - LILLY POWDER COATINGS, INC.
 PRODUCT CODE - 312E
 COLOR - PEBBLE GRAY
 POWDER TYPE - POLYESTER-POLYURETHANE
 PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R
 AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .02 .XXX ± .01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY RJC
NO	REVISION	DATE	BY		DATE 6/18/10
					DWG. NO. 104251DG
					SCALE --
					APRVD. B
					SHT. 1 OF 1