SPECIFICATIONS:	
AMP.	45
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	56
ENCLOSURE	ENCLOSED, 3R
ENCL., COLOR	PEBBLE GRAY

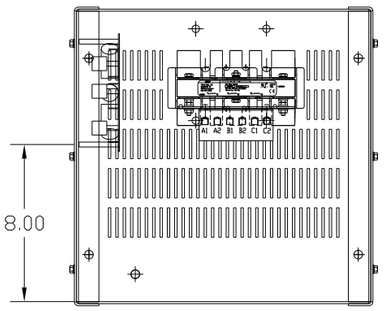

SECTION A-A

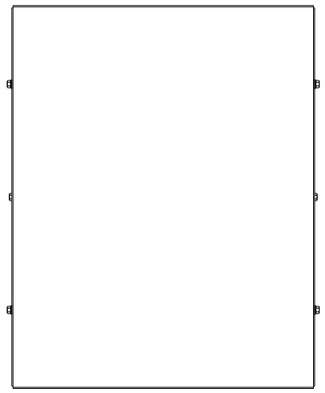

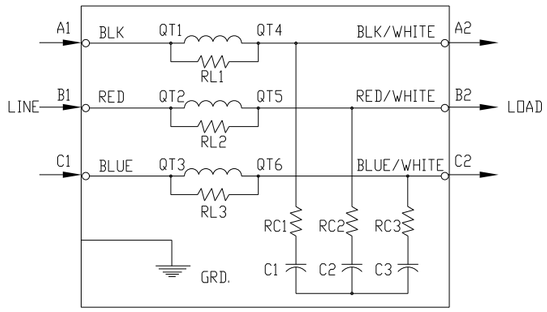

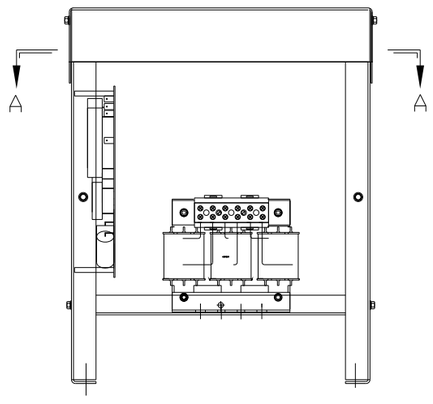

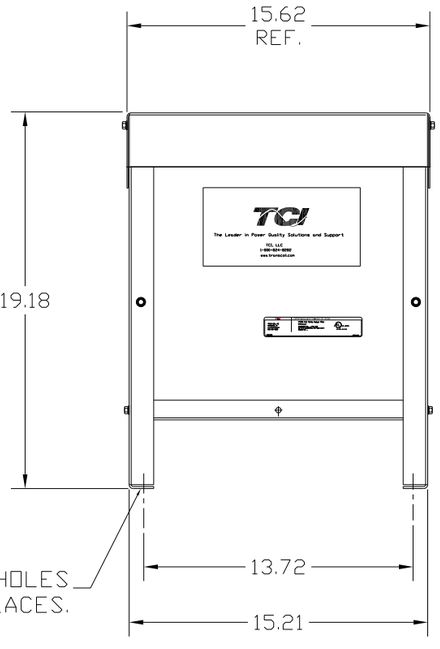

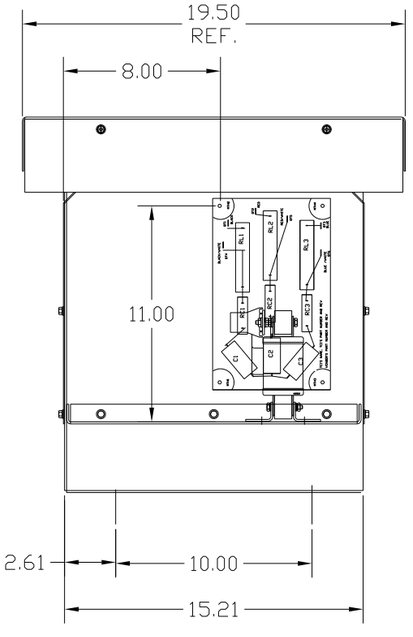

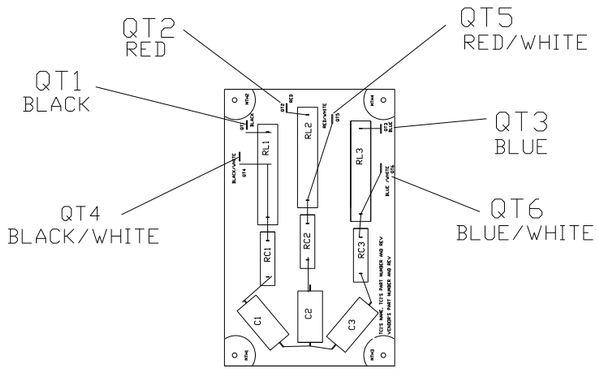

P.C.BOARD
VIEW A-A

FINISH:
VENDOR - LILLY POWDER COATINGS, INC.
PRODUCT CODE - 312E
COLOR - PEBBLE GRAY
POWDER TYPE - POLYESTER-POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TERMINAL BLOCK SPECIFICATIONS:
600 V.
85 AMP. COPPER
50 AMP. ALUM.
WIRE RANGE
1 AWG (7&19 STRAND ONLY)
2 AWG TO 22 AWG.

TORQUE 35 LB-IN #1-#4 AWG
30 LB-IN #6-#14 AWG
25 LB-IN #16-#22 AWG

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .02
.XXX± .01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

TCI
7878 N. 86th STREET
MILWAUKEE, WI 53224

V1K45A03 OUTPUT FILTER
45 AMP, 480/3/60, ENCL.,3R

DRN. BY	DATE	DWG. NO.
RJC	5/20/10	B 104227DG
SCALE --	APRVD.	SHT. 1 OF 1