

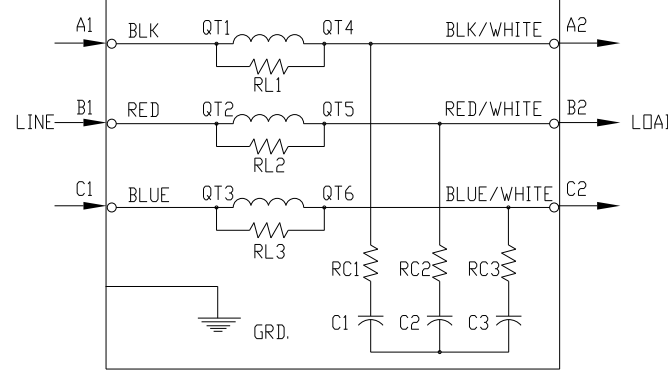
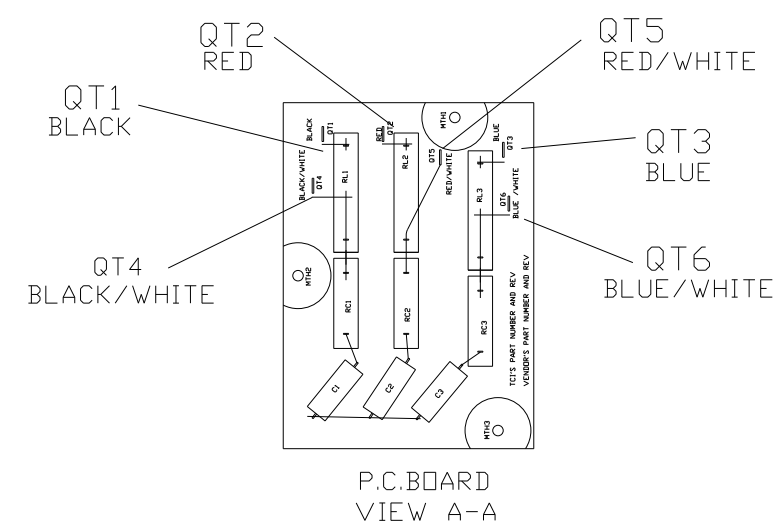


TERMINAL BLOCK SPECIFICATIONS:  
 600 V.  
 20 AMP  
 22-12 AWG  
 TORQUE 10 IN-LBS

.265 DIA HOLES  
 4 PLACES

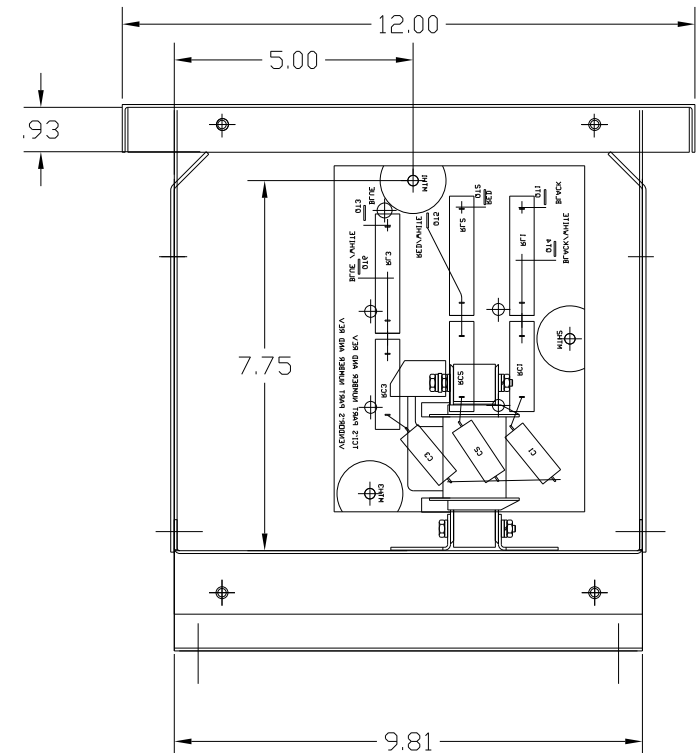

| SPECIFICATIONS: |              |
|-----------------|--------------|
| AMP.            | 6            |
| VOLT            | 240-600      |
| PHASE           | 3            |
| HZ              | 60           |
| WEIGHT, LBS.    | 25           |
| ENCLOSURE       | ENCLOSED, 3R |
| ENCL., COLOR    | PEBBLE GRAY  |

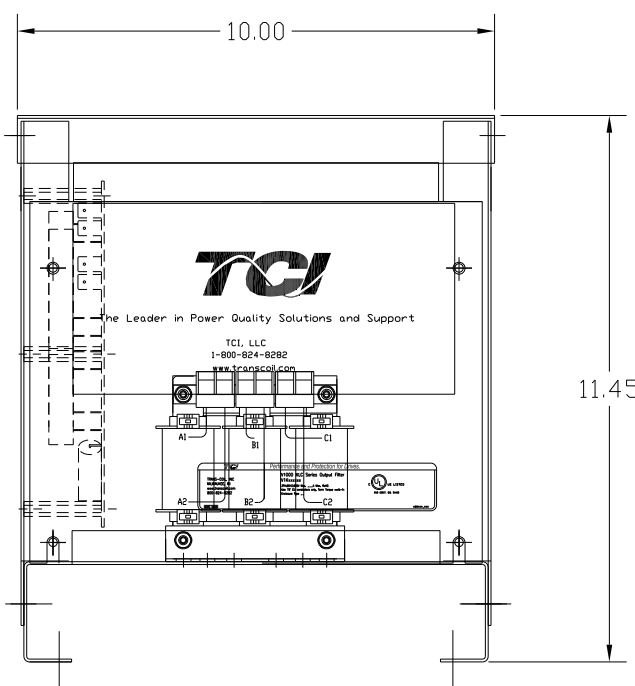

FINISH:  
 VENDOR - LILLY POWDER COATINGS, INC.  
 PRODUCT CODE - 312E  
 COLOR - PEBBLE GRAY  
 POWDER TYPE - POLYESTER-POLYURETHANE  
 PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
 AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO  
 MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

| NO | REVISION | DATE | BY |
|----|----------|------|----|
|    |          |      |    |
|    |          |      |    |
|    |          |      |    |
|    |          |      |    |

|                                 |
|---------------------------------|
| TOLERANCES<br>(EXCEPT AS NOTED) |
| DECIMAL                         |
| .XX ± .02                       |
| .XXX ± .01                      |
| FRACTIONAL                      |
| ± 1/32                          |
| ANGULAR                         |
| ± 1/2°                          |

**TCI** 7878 N. 86th STREET  
 MILWAUKEE, WI 53224

V1K6A03 OUTPUT FILTER  
 6 AMP, 480/3/60, ENCL., 3R

|         |     |        |         |          |             |
|---------|-----|--------|---------|----------|-------------|
| DRN. BY | RJC | DATE   | 5/20/10 | DWG. NO. | 104218DG    |
| SCALE   | --  | APRVD. |         | B        | SHT. 1 OF 1 |