
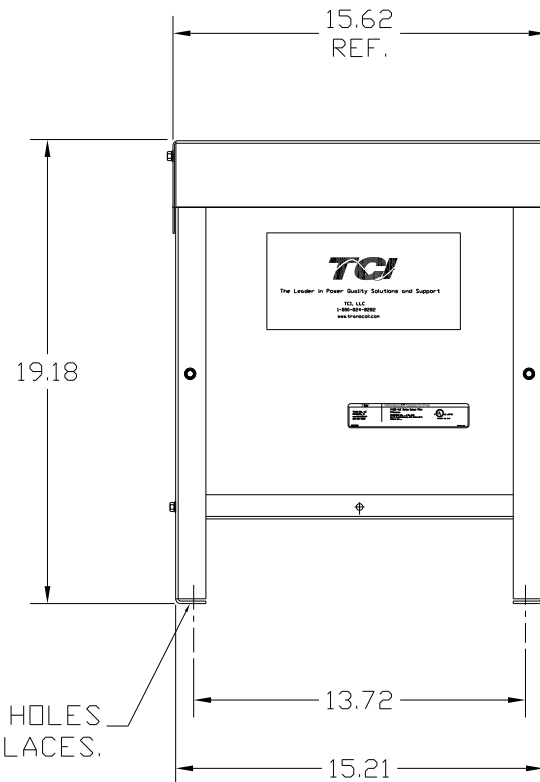
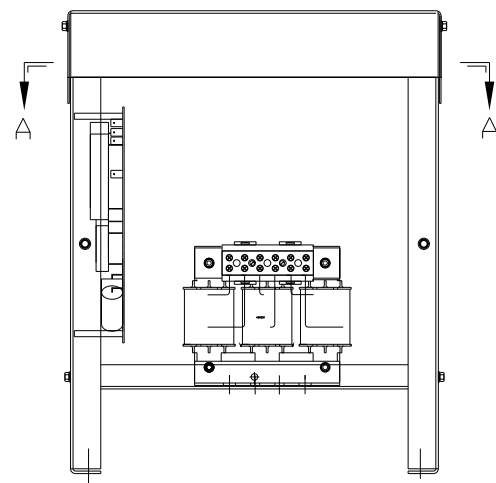


SECTION A-A






.44 DIA HOLES  
4 PLACES.

TERMINAL BLOCK SPECIFICATIONS:

600 V.  
85 AMP. COPPER  
50 AMP. ALUM.  
WIRE RANGE  
1 AWG (7&19 STRAND ONLY)  
2 AWG TO 22 AWG.


TORQUE 35 LB-IN #1-#4 AWG  
30 LB-IN #6-#14 AWG  
25 LB-IN #16-#22 AWG

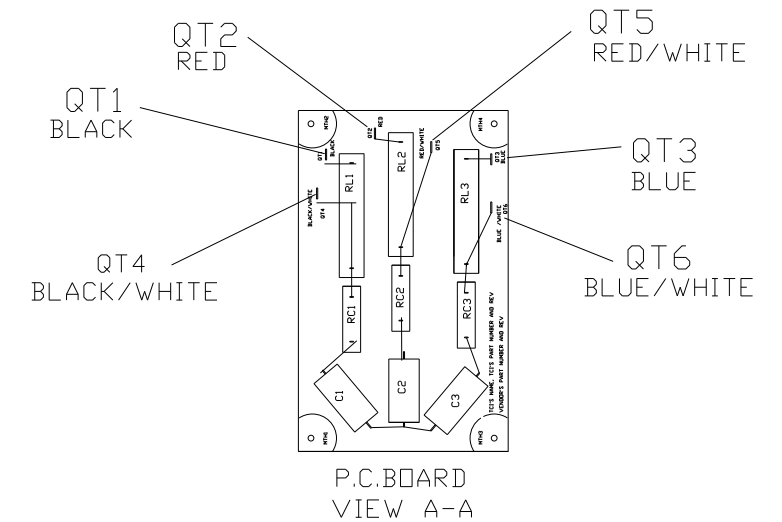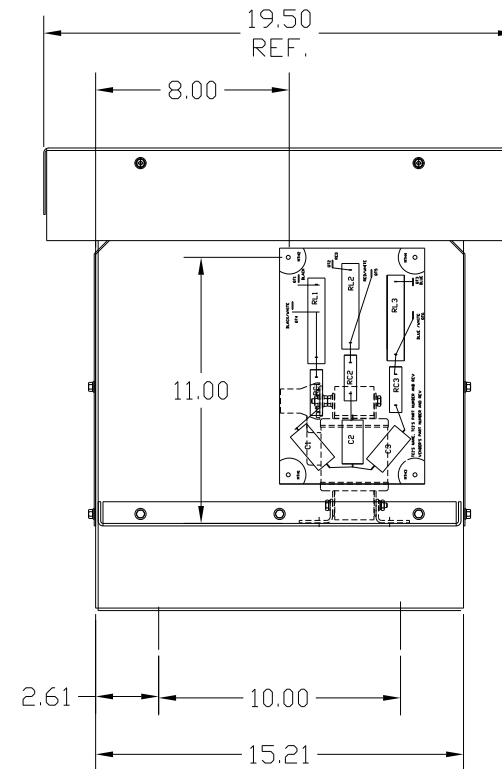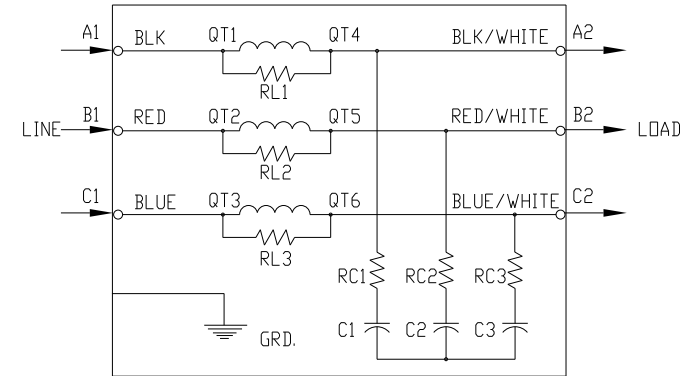

FINISH:  
VENDOR - LILLY POWDER COATINGS, INC.  
PRODUCT CODE - 312E  
COLOR - PEBBLE GRAY  
POWDER TYPE - POLYESTER-POLYURETHANE  
PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R  
AND APPLIED PER A UL ACCEPTED DTVV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO  
MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

SPECIFICATIONS:	
AMP.	80
VOLT	240-600
PHASE	3
HZ	60
WEIGHT, LBS.	62
ENCLOSURE	ENCLOSED, 3R
ENCL., COLOR	PEBBLE GRAY

				TOLERANCES (EXCEPT AS NOTED)		 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .02		V1K80A03 OUTPUT FILTER 80 AMP, 480/3/60, ENCL., 3R	
				.XXX ± .01			
				FRACTIONAL ± 1/32		DRN. BY <b>RJC</b> DATE <b>5/20/10</b> DWG. NO. <b>104229DG</b> SCALE --      APRVD. <b>B</b>	
				ANGULAR ± 1/2°			
NO	REVISION	DATE	BY			SHT. 1 OF 1	